INOVANCE

Advancing industrial technology,
for a better world



SV670P-INT Series Servo Drive

Selection Guide

Industrial Automation | New Energy Vehicle | Intelligent Elevator | Intelligent Robot | Digital Energy | Rail Transit

Data code PS00021342A00

Legal Information

Copyright

Copyright © 2026 Shenzhen Inovance Technology Co., Ltd. All rights reserved.

This documentation is the exclusive property of Shenzhen Inovance Technology Co., Ltd. No individual or entity may excerpt, reproduce, modify, translate, or distribute any content herein without written consent from Inovance.

Legal action will be taken against infringement.

Trademarks

INOVANCE is a registered trademark of Shenzhen Inovance Technology Co., Ltd. and its affiliated companies. All other trademarks or registered trademarks mentioned in this documentation are the property of their respective owners. Unauthorized use of these trademarks by third parties for any purpose without written authorization could violate the rights of their owners.

Disclaimer of Liability

Due to continuous updates and improvements of products and technologies, the content of this documentation may not fully match the actual products. In the event of any discrepancies, the actual products shall prevail.

The contents are subject to change without notice due to product upgrade.

Waste Disposal

Storage, use, and disposal of this product (including optional accessories) must comply with local laws and regulations.

Qualified Personnel

The product/system described in this documentation may be operated only by personnel qualified for the specific task in accordance with the relevant documentation, in particular its warning notices and safety instructions. Qualified personnel can identify the risks of the product/system and prevent possible dangers.

Proper Use of the Product

Proper transportation, storage, assembly, installation, commissioning, operation, and maintenance are required to ensure the safe operation of the product without any problems. The required ambient conditions must be met. All operations must follow the guidelines provided in this documentation.

Preface

Introduction

Thank you for purchasing the SV670P-INT series servo drive developed by Inovance.

The SV670P-INT series servo drive is a premium servo drive featuring high speed, high precision, high performance, and commissioning-free functions. It is compliant with CE, UL, KC, EAC, and UKCA certifications. It is specially suitable for scenarios that require premium functions.

The series offers a power range of 0.05 kW to 7.5 kW and support for Modbus RTU, CANopen, and CANlink communication protocols. The servo drive comes with adaptive stiffness level settings, inertia auto-tuning, and vibration suppression functions for easy use. The servo drive, together with an MS1 series high-response servo motor (with ultra-low, low or medium inertia) equipped with a 23-bit single-turn/multi-turn absolute encoder or a third-party servo motor, serves to deliver a quiet and stable operation and accurate process control through the fully closed-loop function and internal process segment function.

In addition, the drive supports STO function as an optional function. It is equipped with dynamic braking function as standard. This servo drive serves to achieve quick and accurate position control, speed control, and torque control through high-performance solutions for automation equipment in industries such as electronic manufacturing, lithium batteries, manipulators, packaging, and machine tools.

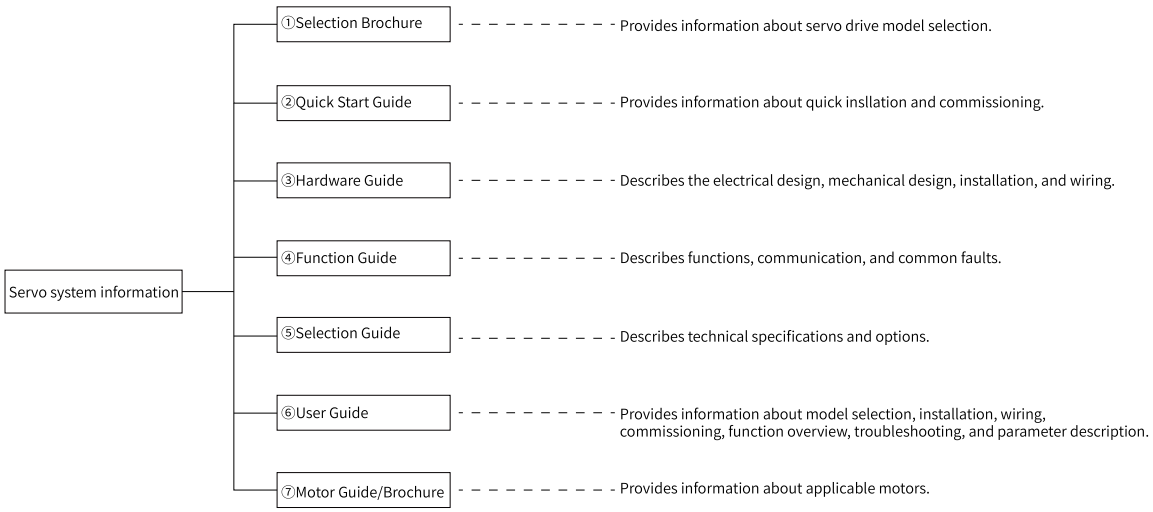
This guide provides information about product selection, including the list of supporting components, technical data on the drive and motor, and cable selection.

Note

The speed unit of a servo motor and a DDR motor in RPM, and that of a DDL motor is mm/s. RPM is used throughout this guide. Unless otherwise specified, an RPM value is equivalent to the mm/s one.

More data

The following figure and table describe related documents of the drive.



No.	Name	Code	Description
①	SV670-INT Series Flagship Servo Drive	19120413	Provides information about product selection, including the list of supporting components, technical data on the drive and motor, and cable selection guide.
②	SV670P-INT Series Servo Quick Start Guide	PS00021339	Introduces product models, installation, and quick commissioning.
③	SV670P-INT Series Servo Drive Hardware Guide	PS00021340	Describes the installation and wiring of the drive, including pre-installation preparation, unpacking and handling, mechanical installation, and electrical installation.
④	SV670P-INT Series Servo Drive Function Guide	PS00021341	Describes the functions and parameters of the product, including function overview, basic servo functions, tuning instructions, and parameter descriptions.
⑤	SV670P-INT Series Servo Drive Selection Guide (current guide)	PS00021342	Provides information about product selection, including the list of supporting components, technical data on the drive and motor, and cable selection guide.
⑥	SV670P-INT Series Servo Drive User Guide	PS00021338	Provides information about model selection, installation, commissioning, function, troubleshooting and parameters of the equipment.
⑦	MS1-R Series Servo Motor Selection Guide	PS00004605	Describes product information, general specifications, motor selection, cable selection, certification categories and standards of the motor.
	MS1-R Series Servo Motor Installation Guide	PS00005407	Describes the installation of the motor, including motor installation flowcharts, wiring, unpacking and handling, mechanical installation, and electrical installation.

Revision history

Date	Version	Revision
July 2026	A00	First release.

Access to the guide

This guide is not delivered with the product. You can download the PDF version in the following ways:

- Visit *https://www.inovance.com/global*, and choose **Service&Support > Support > Documentation Download**.
- Scan the **QR code** on the product with your smartphone.
- Scan the QR code below to install the **My Inovance** app, where you can search for and download the guide.

Scope of standard functions

This guide describes the function application. The scope of functions described in this guide may differ from those of the system delivered. The actual functionality of the delivered system shall prevail.

Systems ordered may include functions not described in the guide and functions of the system delivered may differ from those described in the guide. Contact the post-sales support if necessary.

This guide does not cover complete technical specifications for all product types, nor does it cover solutions to every potential scenario that may occur during installation, operation, and maintenance. For any functions added or modified on the device by the device manufacturer, the device manufacturer shall provide the relevant information.

Warranty disclaimer

Inovance provides warranty service within the warranty period (as specified in your order) for any fault or damage that is not caused by improper operation of the user. Maintenance will be charged after the warranty expires.

Even within the warranty period, maintenance can be charged for the following product damage:

- Damage caused by operations not following the instructions in the guide
- Damage caused by fire, flood, or abnormal voltage
- Damage caused by using the product for unintended functions
- Damage caused by using the product outside the specified scope
- Damage or secondary damage caused by force majeure (natural disaster, earthquake, and lightning strike)

When applicable, relevant maintenance fee will be charged according to the latest Price List of Inovance. If otherwise agreed upon, the agreed terms and conditions shall prevail.

For details, see the Warranty Card.

1 Model Selection

1.1 List of Model Selection (Compatible with MS1-R-INT Series Servo Motor)

Servo motor				Servo drive SV670-INT			
Models without brake	Models with brake	Flange size (mm)	Capacity (kW)	Voltage class:	Size	Model	No.
Ratings of MS1H1 (n_N= 3000 rpm, n_{max}=7000 rpm) series motors							
MS1H1-05B30CB-A330R-INT	MS1H1-05B30CB-A332R-INT	40	0.05	Single-phase/ Three-phase 200 V	A	S1R6	00002
MS1H1-10B30CB-A330R-INT	MS1H1-10B30CB-A332R-INT	40	0.1	Single-phase/ Three-phase 200 V			
MS1H1-20B30CB-A331R-INT	MS1H1-20B30CB-A334R-INT	60	0.2	Single-phase/ Three-phase 200 V			
MS1H1-40B30CB-A331R-INT	MS1H1-40B30CB-A334R-INT	60	0.4	Single-phase/ Three-phase 200 V		S2R8	00003
MS1H1-55B30CB-A331R-INT	-	80	0.55	Single-phase/ Three-phase 200 V	C	S5R5	00005
MS1H1-75B30CB-A331R-INT	MS1H1-75B30CB-A334R-INT	80	0.75	Single-phase/ Three-phase 200 V		S5R5	00005
MS1H1-10C30CB-A331R-INT	MS1H1-10C30CB-A334R-INT	80	1.0	Single-phase/ Three-phase 200 V	C	S7R6	00006
Ratings of MS1H2 (n_N= 3000 rpm, n_{max}= 6000 rpm) series motors							
MS1H2-10C30CB-A331R-INT	MS1H2-10C30CB-A334R-INT	100	1.0	Single-phase/ Three-phase 200 V	C	S7R6	00006
MS1H2-10C30CD-A331R-INT	MS1H2-10C30CD-A334R-INT	100	1.0	Three-phase 400 V		T3R5	10001
MS1H2-15C30CB-A331R-INT	MS1H2-15C30CB-A334R-INT	100	1.5	Single-phase/ Three-phase 200 V	D	S012	00007
MS1H2-15C30CD-A331R-INT	MS1H2-15C30CD-A334R-INT	100	1.5	Three-phase 400 V	C	T5R4	10002
MS1H2-20C30CB-A331R-INT	MS1H2-20C30CB-A334R-INT	100	2.0	Three-phase 200 V	E	S018	00008

Servo motor				Servo drive SV670-INT			
Models without brake	Models with brake	Flange size (mm)	Capacity (kW)	Voltage class:	Size	Model	No.
MS1H2-20C30CD-A331R-INT	MS1H2-20C30CD-A334R-INT	100	2.0	Three-phase 400 V	D	T8R4	10003
MS1H2-25C30CB-A331R-INT	MS1H2-25C30CB-A334R-INT	100	2.5	Three-phase 200 V	E	S022	00009
MS1H2-25C30CD-A331R-INT	MS1H2-25C30CD-A334R-INT	100	2.5	Three-phase 400 V	D	T012	10004
MS1H2-30C30CB-A331R-INT	MS1H2-30C30CB-A334R-INT	130	3.0	Three-phase 200 V	E	S022	00009
MS1H2-30C30CD-A331R-INT	MS1H2-30C30CD-A334R-INT	130	3.0	Three-phase 400 V	D	T012	10004
MS1H2-40C30CB-A331R-INT	MS1H2-40C30CB-A334R-INT	130	4.0	Three-phase 200 V	E	S027	00010
MS1H2-40C30CD-A331R-INT	MS1H2-40C30CD-A334R-INT	130	4.0	Three-phase 400 V	E	T017	10005
MS1H2-50C30CB-A331R-INT	MS1H2-50C30CB-A334R-INT	130	5.0	Three-phase 200 V		S027	00010
MS1H2-50C30CD-A331R-INT	MS1H2-50C30CD-A334R-INT	130	5.0	Three-phase 400 V		T021	10006
Ratings of MS1H3 (n_N=1500 rpm, n_{max}= 4500 rpm) series motors							
MS1H3-85B15CB-A331R-INT	MS1H3-85B15CB-A334R-INT	130	0.85	Single-phase/ Three-phase 200 V	C	S7R6	00006
MS1H3-85B15CD-A331R-INT	MS1H3-85B15CD-A334R-INT	130	0.85	Three-phase 400 V		T3R5	10001
MS1H3-13C15CB-A331R-INT	MS1H3-13C15CB-A334R-INT	130	1.3	Single-phase/ Three-phase 200 V	D	S012	00007
MS1H3-13C15CD-A331R-INT	MS1H3-13C15CD-A334R-INT	130	1.3	Three-phase 400 V	C	T5R4	10002
MS1H3-18C15CB-A331R-INT	MS1H3-18C15CB-A334R-INT	130	1.8	Three-phase 200 V	D	S012	00007
MS1H3-18C15CD-A331R-INT	MS1H3-18C15CD-A334R-INT	130	1.8	Three-phase 400 V	D	T8R4	10003
MS1H3-29C15CB-A331R-INT	MS1H3-29C15CB-A334R-INT	180	2.9	Three-phase 200 V	E	S022	00009
MS1H3-29C15CD-A331R-INT	MS1H3-29C15CD-A334R-INT	180	2.9	Three-phase 400 V	D	T012	10004
MS1H3-44C15CB-A331R-INT	MS1H3-44C15CB-A334R-INT	180	4.4	Three-phase 200 V	E	S027	00010

Servo motor				Servo drive SV670-INT			
Models without brake	Models with brake	Flange size (mm)	Capacity (kW)	Voltage class:	Size	Model	No.
MS1H3-44C15CD-A331R-INT	MS1H3-44C15CD-A334R-INT	180	4.4	Three-phase 400 V	E	T017	10005
MS1H3-55C15CD-A331R-INT	MS1H3-55C15CD-A334R-INT	180	5.5	Three-phase 400 V		T021	10006
MS1H3-75C15CD-A331R-INT	MS1H3-75C15CD-A334R-INT	180	7.5	Three-phase 400 V		T026	10007
Ratings of MS1H4 (n_N= 3000 rpm, n_{max}=7000 rpm) series motors							
MS1H4-05B30CB-A330R-INT	MS1H4-05B30CB-A332R-INT	40	0.05	Single-phase/ Three-phase 200 V	A	S1R6	00002
MS1H4-10B30CB-A330R-INT	MS1H4-10B30CB-A332R-INT	40	0.1	Single-phase/ Three-phase 200 V		S1R6	00002
MS1H4-05B30CB-A331R-INT	MS1H4-05B30CB-A334R-INT	40	0.05	Single-phase/ Three-phase 200 V		S1R6	00002
MS1H4-10B30CB-A331R-INT	MS1H4-10B30CB-A334R-INT	40	0.1	Single-phase/ Three-phase 200 V		S1R6	00002
MS1H4-20B30CB-A331R-INT	MS1H4-20B30CB-A334R-INT	60	0.2	Single-phase/ Three-phase 200 V		S1R6	00002
MS1H4-40B30CB-A331R-INT	MS1H4-40B30CB-A334R-INT	60	0.4	Single-phase/ Three-phase 200 V		S2R8	00003
MS1H4-55B30CB-A331R-INT	-	80	0.55	Single-phase/ Three-phase 200 V	C	S5R5	00005
MS1H4-75B30CB-A331R-INT	MS1H4-75B30CB-A334R-INT	80	0.75	Single-phase/ Three-phase 200 V		S5R5	00005
MS1H4-10C30CB-A331R-INT	MS1H4-10C30CB-A334R-INT	80	1.0	Single-phase/ Three-phase 200 V	C	S7R6	00006

Note

- [1] See the torque-speed characteristics curves of this model for drives with S012 in *MS1-R Series Servo Motor Selection Guide*.
- [2] See the torque-speed characteristics curves of this model for drives with T8R4 in *MS1-R Series Servo Motor Selection Guide*.
- [3] See the torque-speed characteristics curves of this model for drives with T017 in *MS1-R Series Servo Motor Selection Guide*.

1.2 Model Selection (Compatible with MS1-R-INT Series Servo Motor with Battery-free Encoder)

Servo motor				Servo drive SV670-INT Series			
Model without brake	Model with brake	Frame size (mm)	Capacity (kW)	Voltage class	Size	Recommended model	No.
Ratings of MS1H1 (n_N= 3000 rpm, n_{max}=7000 rpm) series motors							
MS1H1-05B30CB-V330R-INT	MS1H1-05B30CB-V332R-INT	40	0.05	Single-phase/ Three-phase 200 V	A	S1R6	00002
MS1H1-10B30CB-V330R-INT	MS1H1-10B30CB-V332R-INT	40	0.1	Single-phase/ Three-phase 200 V			
MS1H1-20B30CB-V331R-INT	MS1H1-20B30CB-V334R-INT	60	0.2	Single-phase/ Three-phase 200 V			
MS1H1-40B30CB-V331R-INT	MS1H1-40B30CB-V334R-INT	60	0.4	Single-phase/ Three-phase 200 V		S2R8	00003
MS1H1-55B30CB-V331R-INT	-	80	0.55	Single-phase/ Three-phase 200 V	C	S5R5	00005
MS1H1-75B30CB-V331R-INT	MS1H1-75B30CB-V334R-INT	80	0.75	Single-phase/ Three-phase 200 V		S5R5	00005
MS1H1-10C30CB-V331R-INT	MS1H1-10C30CB-V334R-INT	80	1.0	Single-phase/ Three-phase 200 V	C	S7R6	00006
Ratings of MS1H2 (n_N= 3000 rpm, n_{max}= 6000 rpm) series motors							
MS1H2-10C30CB-V331R-INT	MS1H2-10C30CB-V334R-INT	100	1.0	Single-phase/ Three-phase 200 V	C	S7R6	00006
MS1H2-10C30CD-V331R-INT	MS1H2-10C30CD-V334R-INT	100	1.0	Three-phase 400 V		T3R5	10001
MS1H2-15C30CB-V331R-INT	MS1H2-15C30CB-V334R-INT	100	1.5	Single-phase/ Three-phase 200 V	D	S012	00007
MS1H2-15C30CD-V331R-INT	MS1H2-15C30CD-V334R-INT	100	1.5	Three-phase 400 V	C	T5R4	10002
MS1H2-20C30CB-V331R-INT	MS1H2-20C30CB-V334R-INT	100	2.0	Three-phase 200 V	E	S018[1]	00008
MS1H2-20C30CD-V331R-INT	MS1H2-20C30CD-V334R-INT	100	2.0	Three-phase 400 V	D	T8R4	10003
MS1H2-25C30CB-V331R-INT	MS1H2-25C30CB-V334R-INT	100	2.5	Three-phase 200 V	E	S022	00009

Servo motor				Servo drive SV670-INT Series			
Model without brake	Model with brake	Frame size (mm)	Capacity (kW)	Voltage class	Size	Recommended model	No.
MS1H2-25C30CD-V331R-INT	MS1H2-25C30CD-V334R-INT	100	2.5	Three-phase 400 V	D	T012[2]	10004
MS1H2-30C30CB-V331R-INT	MS1H2-30C30CB-V334R-INT	130	3.0	Three-phase 200 V	E	S022	00009
MS1H2-30C30CD-V331R-INT	MS1H2-30C30CD-V334R-INT	130	3.0	Three-phase 400 V	D	T012	10004
MS1H2-40C30CB-V331R-INT	MS1H2-40C30CB-V334R-INT	130	4.0	Three-phase 200 V	E	S027	00010
MS1H2-40C30CD-V331R-INT	MS1H2-40C30CD-V334R-INT	130	4.0	Three-phase 400 V	E	T017	10005
MS1H2-50C30CB-V331R-INT	MS1H2-50C30CB-V334R-INT	130	5.0	Three-phase 200 V		S027	00010
MS1H2-50C30CD-V331R-INT	MS1H2-50C30CD-V334R-INT	130	5.0	Three-phase 400 V		T021[3]	10006
Ratings of MS1H3 (n_N=1500 rpm, n_{max}= 4500 rpm) series motors							
MS1H3-85B15CB-V331R-INT	MS1H3-85B15CB-V334R-INT	130	0.85	Single-phase/ Three-phase 200 V	C	S7R6	00006
MS1H3-85B15CD-V331R-INT	MS1H3-85B15CD-V334R-INT	130	0.85	Three-phase 400 V		T3R5	10001
MS1H3-13C15CB-V331R-INT	MS1H3-13C15CB-V334R-INT	130	1.3	Single-phase/ Three-phase 200 V	D	S012	00007
MS1H3-13C15CD-V331R-INT	MS1H3-13C15CD-V334R-INT	130	1.3	Three-phase 400 V	C	T5R4	10002
MS1H3-18C15CB-V331R-INT	MS1H3-18C15CB-V334R-INT	130	1.8	Three-phase 200 V	D	S012	00007
MS1H3-18C15CD-V331R-INT	MS1H3-18C15CD-V334R-INT	130	1.8	Three-phase 400 V	D	T8R4	10003
MS1H3-29C15CB-V331R-INT	MS1H3-29C15CB-V334R-INT	180	2.9	Three-phase 200 V	E	S022	00009
MS1H3-29C15CD-V331R-INT	MS1H3-29C15CD-V334R-INT	180	2.9	Three-phase 400 V	D	T012	10004
MS1H3-44C15CB-V331R-INT	MS1H3-44C15CB-V334R-INT	180	4.4	Three-phase 200 V	E	S027	00010
MS1H3-44C15CD-V331R-INT	MS1H3-44C15CD-V334R-INT	180	4.4	Three-phase 400 V	E	T017	10005
MS1H3-55C15CD-V331R-INT	MS1H3-55C15CD-V334R-INT	180	5.5	Three-phase 400 V		T021	10006
MS1H3-75C15CD-V331R-INT	MS1H3-75C15CD-V334R-INT	180	7.5	Three-phase 400 V		T026	10007

Servo motor				Servo drive SV670-INT Series			
Model without brake	Model with brake	Frame size (mm)	Capacity (kW)	Voltage class	Size	Recommended model	No.
Ratings of MS1H4 (n_N= 3000 rpm, n_{max}=7000 rpm) series motors							
MS1H4-05B30CB-V330R-INT	MS1H4-05B30CB-V332R-INT	40	0.05	Single-phase/ Three-phase 200 V	A	S1R6	00002
MS1H4-05B30CB-V331R-INT	MS1H4-05B30CB-V334R-INT	40	0.05	Single-phase/ Three-phase 200 V			
MS1H4-10B30CB-V332R-INT	MS1H4-10B30CB-V332R-INT	40	0.1	Single-phase/ Three-phase 200 V			
MS1H4-10B30CB-V334R-INT	MS1H4-10B30CB-V334R-INT	40	0.1	Single-phase/ Three-phase 200 V			
MS1H4-20B30CB-V331R-INT	MS1H4-20B30CB-V334R-INT	60	0.2	Single-phase/ Three-phase 200 V			
MS1H4-40B30CB-V331R-INT	MS1H4-40B30CB-V334R-INT	60	0.4	Single-phase/ Three-phase 200 V		S2R8	00003
MS1H4-55B30CB-V331R-INT	-	80	0.55	Single-phase/ Three-phase 200 V	C	S5R5	00005
MS1H4-75B30CB-V331R-INT	MS1H4-75B30CB-V334R-INT	80	0.75	Single-phase/ Three-phase 200 V		S5R5	00005
MS1H4-10C30CB-V331R-INT	MS1H4-10C30CB-V334R-INT	80	1.0	Single-phase/ Three-phase 200 V	C	S7R6	00006

Note

- [1] See the torque-speed characteristics curves of this model for drives with S012. The drive parameters does not change.
- [2] See the torque-speed characteristics curves of this model for drives with T8R4. The drive parameters does not change.
- [3] See the torque-speed characteristics curves of this model for drives with T017. The drive parameters does not change.
- [4] See the torque-speed characteristics curves of this model for drives with S018. The drive parameters does not change.
- Models of drives:
  - S - 200 V voltage class
  - T - 400 V voltage class
  - 1R6 - Rated output current = 1.6 A; 2R8 - Rated output current = 2.8 A…; 026 - Rated output current = 26 A; 027 - Rated output current = 27 A
- Different motors match different series of servo drives. The maximum speed and maximum torque output of the motor vary slightly. See the selection guide of the servo drive for details.
- Servo motors designed to work with 23-bit (V3) or 26-bit (V6) encoders have the same dimensions.
- The MS1-R series motors equipped with the V6/V3/A6/A3 encoders have the same dimensions.

1.3 List of Motor Model Selection (Compatible with LMC Linear Module)

Motor model	Servo drive model SV670-INT series	Power cable length (m)				
		3	5	8	10	12
LMC88100Y1-INT LMC88-130Y1-INT LMC88-185Y1-INT LMC88-240Y1-INT	S5R5	S6-L-M160-3.0-TTS-2-INT	S6-L-M160-5.0-TTS-2-INT	S6-L-M160-8.0-TTS-2-INT	S6-L-M160-10.0-TTS-2-INT	S6-L-M160-12.0-TTS-2-INT
LMC118-130Y1-INT LMC118-185Y1-INT	S5R5	S6-L-M160-3.0-TTS-2-INT	S6-L-M160-5.0-TTS-2-INT	S6-L-M160-8.0-TTS-2-INT	S6-L-M160-10.0-TTS-2-INT	S6-L-M160-12.0-TTS-2-INT
LMC118-240Y2-INT	S7R6	S6-L-M160-3.0-TTS-2-INT	S6-L-M160-5.0-TTS-2-INT	S6-L-M160-8.0-TTS-2-INT	S6-L-M160-10.0-TTS-2-INT	S6-L-M160-12.0-TTS-2-INT
LMC118-185Y3-INT LMC118-355Y3-INT	S012	S6-L-M150-3.0-TTS-2-INT	S6-L-M150-5.0-TTS-2-INT	S6-L-M150-8.0-TTS-2-INT	S6-L-M150-10.0-TTS-2-INT	S6-L-M150-12.0-TTS-2-INT
LMC168-185Y1-INT	S5R5	S6-L-M160-3.0-TTS-2-INT	S6-L-M160-5.0-TTS-2-INT	S6-L-M160-8.0-TTS-2-INT	S6-L-M160-10.0-TTS-2-INT	S6-L-M160-12.0-TTS-2-INT
LMC168-130Y2-INT LMC168-240Y2-INT	S7R6	S6-L-M160-3.0-TTS-2-INT	S6-L-M160-5.0-TTS-2-INT	S6-L-M160-8.0-TTS-2-INT	S6-L-M160-10.0-TTS-2-INT	S6-L-M160-12.0-TTS-2-INT
LMC168-185Y3-INT LMC168-240Y4-INT	S012	S6-L-M150-3.0-TTS-2-INT	S6-L-M150-5.0-TTS-2-INT	S6-L-M150-8.0-TTS-2-INT	S6-L-M150-10.0-TTS-2-INT	S6-L-M150-12.0-TTS-2-INT
LMC188-240Y2-INT	S7R6	S6-L-M160-3.0-TTS-2-INT	S6-L-M160-5.0-TTS-2-INT	S6-L-M160-8.0-TTS-2-INT	S6-L-M160-10.0-TTS-2-INT	S6-L-M160-12.0-TTS-2-INT

Motor model	Servo drive model SV670-INT series	Power cable length (m)				
		3	5	8	10	12
LMC188-355Y3-INT LMC188-240Y4-INT	S012	S6-L-M150-3.0-TTS-2-INT	S6-L-M150-5.0-TTS-2-INT	S6-L-M150-8.0-TTS-2-INT	S6-L-M150-10.0-TTS-2-INT	S6-L-M150-12.0-TTS-2-INT
LMC188-355Y6-INT	S021	S6-L-M040-3.0-TTS-2-INT	S6-L-M040-5.0-TTS-2-INT	S6-L-M040-8.0-TTS-2-INT	S6-L-M040-10.0-TTS-2-INT	S6-L-M040-12.0-TTS-2-INT
LMC228-240Y4-INT	S012	S6-L-M150-3.0-TTS-2-INT	S6-L-M150-5.0-TTS-2-INT	S6-L-M150-8.0-TTS-2-INT	S6-L-M150- 10.0-TTS-2-INT	S6-L-M150- 12.0-TTS-2-INT
LMC228-290Y5-INT	S017	S6-L-M040-3.0-TTS-2-INT	S6-L-M040-5.0-TTS-2-INT	S6-L-M040-8.0-TTS-2-INT	S6-L-M040- 10.0-TTS-2-INT	S6-L-M040- 12.0-TTS-2-INT

1.4 List of Motor Model Selection (Compatible with MP Series Torque Motor)

Motor model	Servo drive SV670-INT series	Extension power cable length (3 m)	Extension power cable length (5 m)	Extension power cable length (10 m)
MP1-112F10AB-U313X-INT	S2R8	S6-L-M110-3.0-T-INT	S6-L-M110-5.0-T-INT	S6-L-M110-10.0-T-INT
MP1-140S10BB-U323X-INT	S012	S6-L-M110-3.0-T-INT	S6-L-M110-5.0-T-INT	S6-L-M110-10.0-T-INT
MP1-175S11BB-U333X-INT	S012	S6-L-M110-3.0-T-INT	S6-L-M110-5.0-T-INT	S6-L-M110-10.0-T-INT
MP1-220S15BB-U323X-INT	S012	S6-L-M0BD-3.0-INT	S6-L-M0BD-5.0-INT	S6-L-M0BD-10.0-INT
MP1-220S30BD-U323X-INT	T021	S6-L-M0BD-3.0-INT	S6-L-M0BD-5.0-INT	S6-L-M0BD-10.0-INT
MP1-220S30BD-U323L-C-INT	T026	S6-L-M0BD-3.0-INT	S6-L-M0BD-5.0-INT	S6-L-M0BD-10.0-INT

1.5 List of Motor Model Selection (Compatible with ISM Series Torque Motor)

Motor model	Servo drive SV670-INT series	Extension power cable length (3 m)	Extension power cable length (5 m)	Extension power cable length (10 m)
ISMT1-160F12AB-A113X-INT	S2R8	S6-L-M110-3.0-T-INT	S6-L-M110-5.0-T-INT	S6-L-M110-10.0-T-INT
ISMT1-160F12AB-A133X-INT				
ISMT1-160F45AB-A133X-INT				

2 Product Information

2.1 Drive

2.1.1 Model and Nameplate

Model Description

SV670 ① P ② S ③ 2R8 ④ I ⑤ - FS ⑥ - INT ⑦

① **Product series** SV670: SV670 general-purpose servo drive	④ **Rated output current**		⑤ **Model specification** I: Standard type
② **Product type** P: Pulse type + CANopen + CANlink communication type	S: 200 V	1R6: 1.6 A 2R8: 2.8 A 5R5: 5.5 A 7R6: 7.6 A 012: 12.0 A 018: 18.0 A 022: 22.0 A 027: 27.0 A	⑥ **Customized function** Blank: Standard FS: Functional safety model (STO only)
③ **Voltage class** S: 200 V T: 400 V	T: 400 V	3R5: 3.5 A 5R4: 5.4 A 8R4: 8.4 A 012: 12.0 A 017: 17.0 A 021: 21.0 A 026: 26.0 A	⑦ **Model specification** INT: General (global version)

Nameplate description

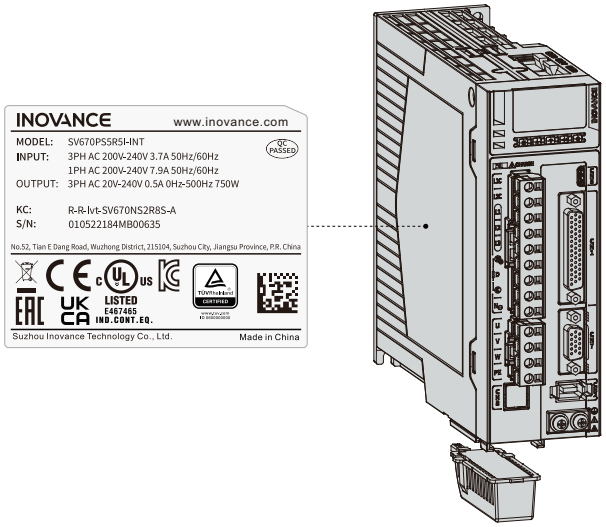


Figure 2-1 Nameplate

Description of production serial number

01050202 4 S 7 00001
① ② ③ ④ ⑤

① **Internal code** Product code	③ **Year** 9: 2009 A: 2010 ... S: 2024 ... Note: I/L/O/Q are skipped.	⑤ **Lot number** 00001: 1st in the month of manufacturing 00002: 2nd in the month of manufacturing 00003: 3rd in the month of manufacturing ... Range: 00001 to 99999
② **Manufacturer code** 4: Suzhou Inovance	④ **Month** 1: January 2: February ... A: October B: November C: December	

Example: S/N 010502024S700001 indicates the drive is manufactured in July 2024.

2.1.2 Component Description

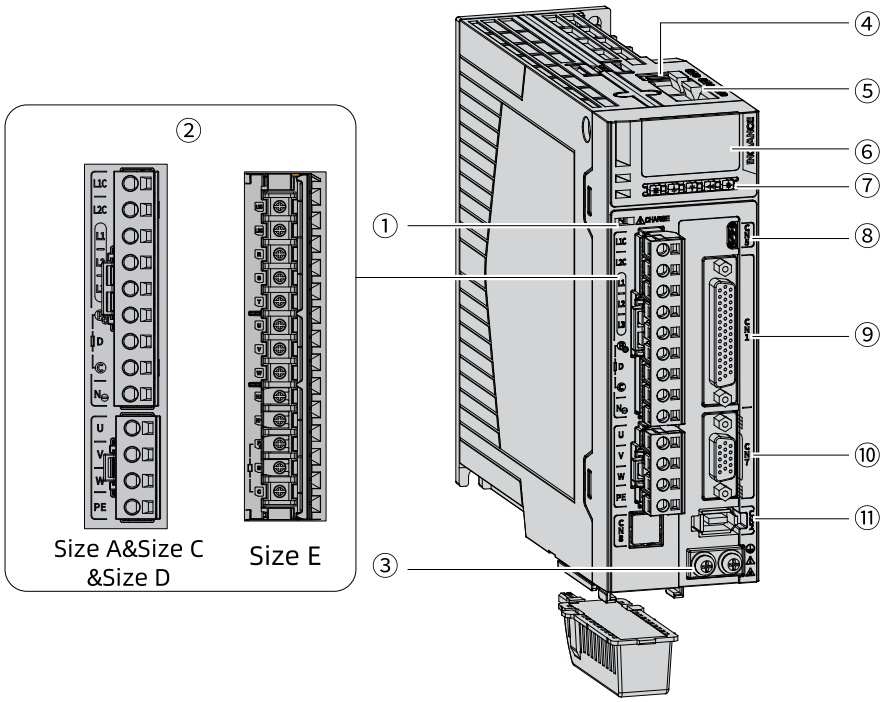


Figure 2-2 Components of servo drives

Table 2–1 Components of the servo drive

No.	Component		Description
①	CHARGE (bus voltage indicator)		Indicates the bus capacitor with charges. When this indicator is on, charges possibly still exist in the internal capacitor of the servo unit, even if the power supply of the main circuit is OFF. To prevent electric shock, do not touch the power supply terminals when this indicator turns on.
② (Size A, Size C, and Size D)	Main circuit terminals	L1C and L2C control circuit power input terminals	Provides power supply to the control circuit as per the rated voltage class on the nameplate
		L1, L2, and L3 (main circuit power input terminal)[1]	Connect this terminal to the power supply for the main circuit of the drive as per the rated voltage on the nameplate.
		$P_{\oplus}$, D, and C (terminals for connecting an external braking resistor)[2]	Remove the jumper bar between terminals $P_{\oplus}$ and D before connecting an external braking resistor between terminals $P_{\oplus}$ and C.
		$P_{\oplus}$, $N_{\ominus}$ (servo bus terminal)	Used by the common DC bus for multiple drives.
		U, V, W, PE (terminals for connecting the servo motor)	Connects the U, V, and W phases and grounding terminal of the motor.

No.	Component		Description
② (Size E)	Main circuit terminals	L1C and L2C control circuit power input terminals	Provides power supply to the control circuit as per the rated voltage class on the nameplate
		R, S, and T (main circuit power input terminals) [1]	Connect this terminal to the power supply for the main circuit of the drive as per the rated voltage on the nameplate.
		P⊕, D, C (external braking resistor terminal)	Remove the jumper bar between terminals P⊕ and D before connecting an external braking resistor between terminals P⊕ and C.
		N2 and N1 (terminals for connecting an external reactor)	N1 is shorted to N2 with a jumper by default. To suppress power supply harmonics, remove the jumper and connect an external DC reactor between N1 and N2.
		U, V, W (terminals for connecting the servo motor)	Connects U, V, and W phases of the motor.
③	Servo drive grounding terminal		Connected to the grounding terminal of the power supply for grounding purpose
④	CN6 STO safety function terminal[1]		Connected to external functional safety signal for functional safety purpose
⑤	CN3, CN4 communication terminals		Connected to Modbus RTU, CANopen, and CANlink host controllers in parallel.
⑥	LED display		The 5-digit 8-segment LED display is used to show operating state and parameter setting of the drive.
⑦	Key operator		M: Used to switch parameters in sequence. ▲: Increases the value of the blinking bit. ▲: Decreases the value of the blinking bit. ◀◀: Shifts the blinking bit leftwards (Hold down: Turns to the next page when the displayed number exceeds five digits) S: Saves modifications and enters the next menu.
⑧	CN5 (communication terminal)		This terminal only supports online upgrade and software tool commissioning, which can be performed only when the drive is energized. In USB mode, the terminal only supports download and upload of parameters, and drive firmware update. The terminal uses USB power supply. If there is a fault that cannot be completely reset, disconnect the USB power supply and drive control power, and then power on again.
⑨	CN1 (control terminal)		Used for reference input signals and other I/O signals.
⑩	CN7 (encoder feedback terminal)		Supports communication-type encoders and pulse-type encoders.
⑪	CN2 (encoder feedback terminal)		Connected to the motor encoder.

Note

- The built-in braking resistor or jumper bar is not available in model S2R8. If an external braking resistor is needed for these models, connect it between terminals P⊕ and C.
- [1]: The CN6 STO safety function terminal is available only to non-standard models (-FS).

2.2 MS1-R-INT Series Servo Motor

2.2.1 Model and Nameplate

Model

MS1 H1 - 75B 30C B - A3 3 1 R - INT
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① **MS1 series servo motor**	② **Inertia and capacity** H1: Low inertia, small capacity H2: Low inertia, medium capacity H3: Medium inertia, medium capacity H4: Medium inertia, small capacity	③ **Rated power (W)** Comprised of one letter and two digits B: × 10 C: × 100 Example: 75B means 750 W.
④ **Rated speed (rpm)** Comprised of one letter and two digits B: × 10 C: × 100 Example: 30C means 3,000 rpm.	⑤ **Voltage class** B: 200 V D: 400 V	⑥ **Encoder type** Comprised of one letter and one digit A6: 26-bit multi-turn absolute encoder S6: functional safety type 26-bit multi-turn absolute encoder A3: 23-bit multi-turn absolute encoder U2: 20-bit single-turn absolute encoder (for 25-flange motors)
⑦ **Shaft connection mode** 3: Solid shaft, with key and threaded hole	⑧ **Brake, reducer, and oil sealing** 0: Without oil seal or brake 1: With oil seal, without brake 2: Without oil seal, with brake 4: With oil seal and brake	⑨ **Sub-series No.** R: R version ⑩ **Customized function** INT: International version

Note

- The description of the model only describes the naming conventions and does not recommend the specific motor models. For details of the model selection, see the Model Selection chapter.
- If you have other customized requirements, contact Inovance.

Nameplate description

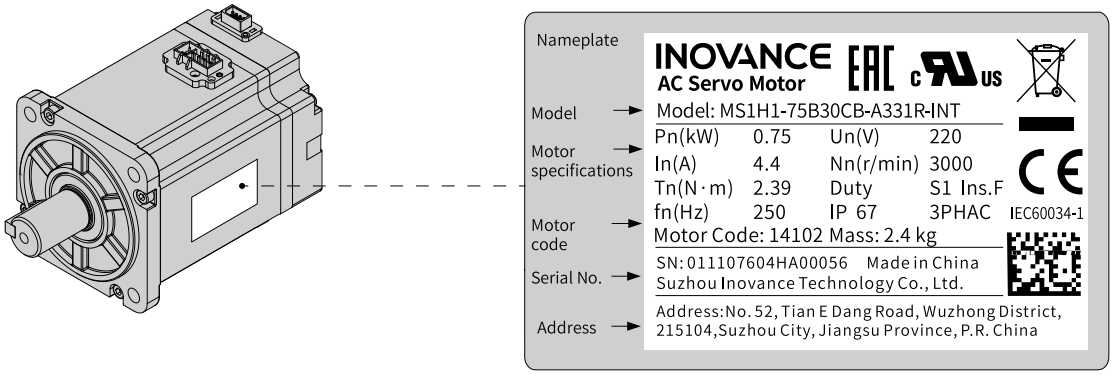


Figure 2-3 Model and Nameplate

2.2.2 Components

Motor (40-flange)

- **Terminal-type servo motor**

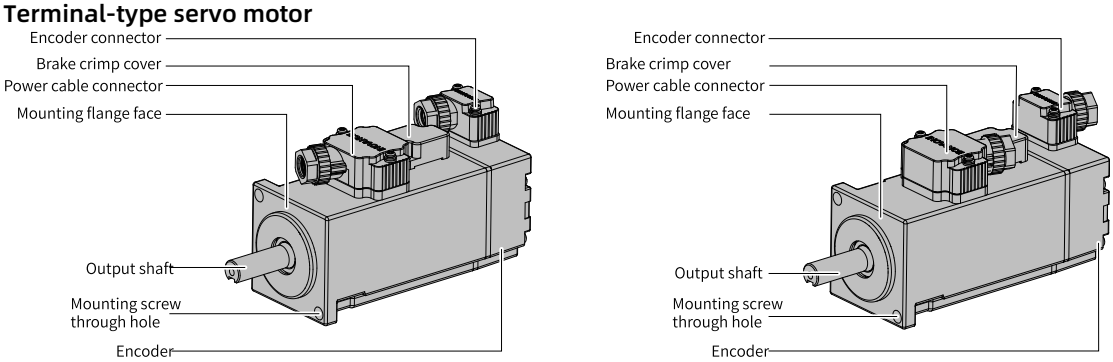


Figure 2-4 Components of terminal-type servo motors (Left: motor with front cable outlet; Right: motor with rear cable outlet)

- **Flying leads type servo motors**

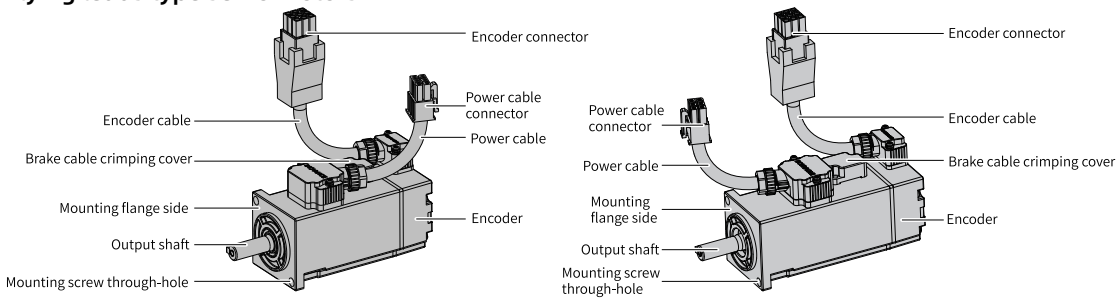


Figure 2-5 Components of the flying leads motor (left: 50 W flying leads motor, right: 100 W flying leads motor)

Note

- For 50 W terminal-type models, use rear outlet for power cables.
- For 100 W models, if the mounting flange face is internally stepped type, only terminal-type models can be used, which are equipped with power cables with rear outlet.
- For details, see the motor dimension diagrams.

Motor (60- and 80-flange)

- **Terminal-type servo motor**

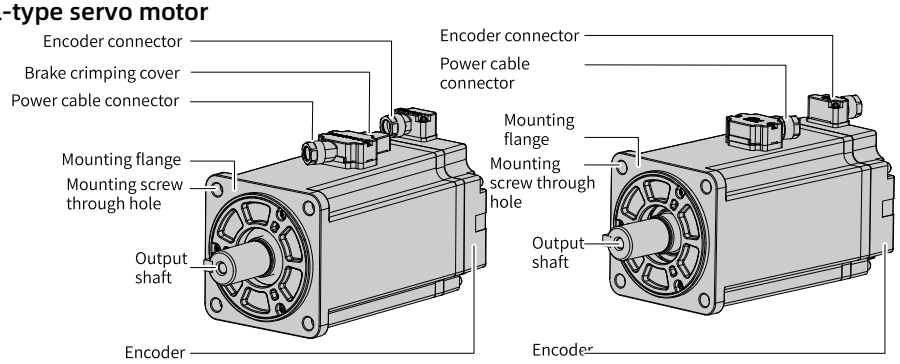


Figure 2-6 Components of terminal-type servo motors (Left: motor with front cable outlet; Right: motor with rear cable outlet)

- **Flying leads type servo motors**

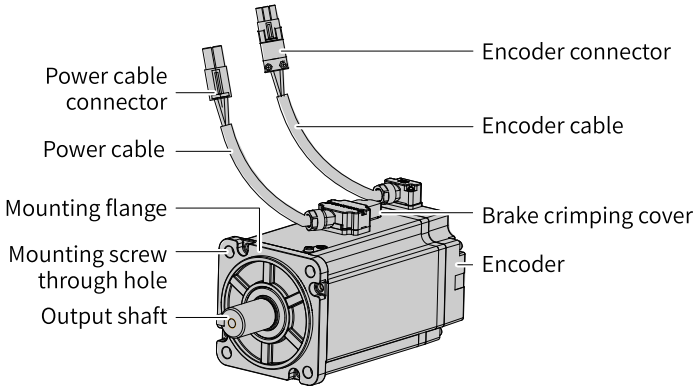


Figure 2-7 Components of the flying leads motor (front cable outlet as standard)

Motor (100-, 130- and 180-flange)

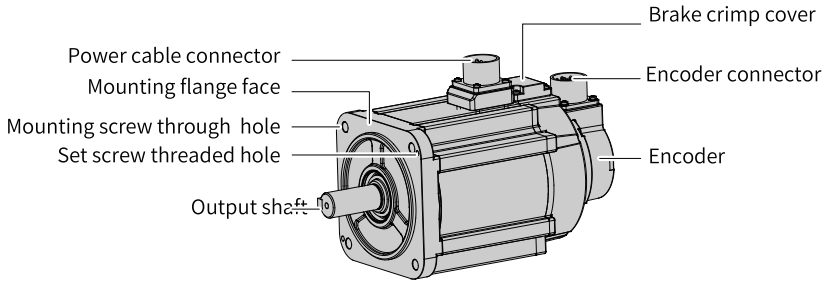


Figure 2-8 Components of servo drives in frame sizes 100/130/180

2.3 MS1-R Series Servo Motor with Battery-free Encoder

2.3.1 Model and Nameplate

Model Description

MS1 H1 - 75B 30C B - V3 3 1 R - INT
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① **MS1 Series Servo Motor**	② **Inertia and capacity** H1: Low inertia, small capacity H2: Low inertia, medium capacity H3: Medium inertia, medium capacity H4: Medium inertia, small capacity	③ **Rated Power (W)** Comprised of one letter and two digits B: x 10 C: x 100 Example: 75B indicates 750 W.
④ **Rated speed (rpm)** Comprised of one letter and two digits B: x 10 C: x 100 Example: 30C indicates 3,000 rpm.	⑤ **Voltage class** B: 200 V D: 400 V	⑥ **Encoder type** Comprised of one letter and one digit V6: Battery-less 26-bit multi-turn absolute encoder V3: Battery-less 23-bit multi-turn absolute encoder
⑦ **Shaft connection mode** 3: Solid shaft, with key and threaded hole	⑧ **Brake, reducer, and oil seal** 0: Without oil seal or brake 1: With oil seal but no brake 2: With brake but no oil seal 4: With oil seal and brake	⑨ **Sub-series No.** R: R version ⑩ **Custom function** INT: Global version

Note

- The description of the model only describes the naming conventions and does not recommend the specific motor models. For details of the model selection, see the Model Selection chapter.
- If you have other customized requirements, contact Inovance.

Nameplate description

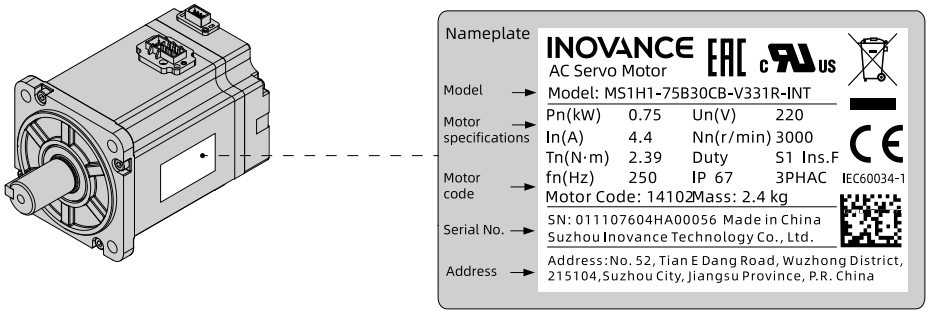


Figure 2-9 Model and Nameplate

2.3.2 Components

Motor (frame sizes 40/60/80)

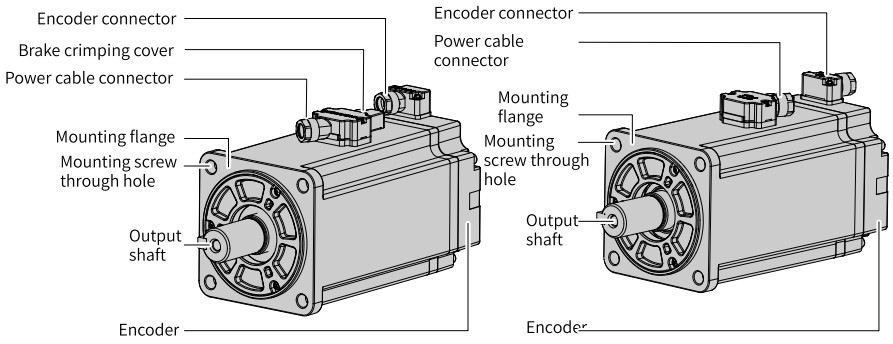


Figure 2-10 Components of servo drives in frame sizes 40/60/80 (Left: motor with front cable outlet; Right: motor with rear cable outlet)

Note

- For 50 W terminal-type models, use rear outlet for power cables.
- For 100 W models, if the mounting flange face is internally stepped type, only terminal-type models can be used, which are equipped with power cables with rear outlet.

Motor (frame sizes 100/ 130/180)

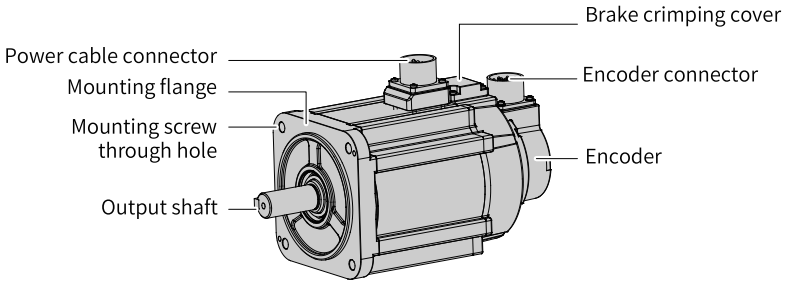


Figure 2-11 Components of servo drives in frame sizes 100/130/180

2.4 ISM Series Torque Motor

2.4.1 Model description

ISM ① T ② 1 ③ - 160 ④ F ⑤ 12A ⑥ B ⑦ - A1 ⑧ 3 ⑨ 3 ⑩ X ⑪ - INT ⑫

① **Product family** ISM: Motor	⑥ **Maximum torque (N·m)** One letter and two digits A: x 1 B: x 10 C: x 100 D: x 1000 E: x 10000 For example, 12A indicates 12 N·m.	⑨ **Installation accuracy** The mechanical deviation must be lower than this value in both the axial and radial directions. 1: Must not exceed 5 μm 2: Must not exceed 10 μm 3: Must not exceed 30 μm
② **Product type** T: torque motor		
③ **Product generation** 1: First generation 2: Second generation		
④ **Flange size** 85: 85 mm diameter 160: 160 mm diameter 208: 208 mm diameter 264: 264 mm diameter	⑦ **Voltage class (V)** B: 200 V D: 400 V	⑩ **Connector type** 1: Connector 2: Cable gland - Straight outlet of 3 m 3: Cable gland - Straight outlet of 0.3 m
⑤ **Basic structure** S: Standard, cylindrical mounting flange F: Flange, rectangle mounting flange	⑧ **Encoder type** One letter and one digit A1: 23-bit single-turn absolute encoder A3: 64-bit sine-cosine absolute encoder with Hiperface A5: 128-bit sine-cosine absolute encoder with Hiperface	⑪ **Cooling method** X: Natural cooling F: Fan cooling L: Water cooling ⑫ **Model configuration** INT: Global version

2.4.2 Components

ISMT1-160F12AB-A133X-INT

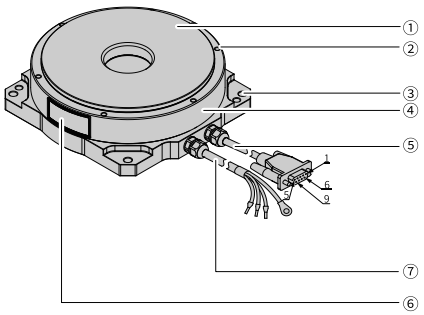



Figure 2-12 Components of ISMT1-160F12AB-A133X-INT

Table 2–2 Motor Components

<table>
<tr><th>No.</th><th>Component</th><th>Description</th></tr>
<tr><td>①</td><td>Mounting flange for rotary platen</td><td>The mounting flange that is used to install the load-side rotary platen.</td></tr>
<tr><td>②</td><td>Rotary platen positioning pin hole</td><td>The positioning pin holes that are used to install the rotary platen.</td></tr>
<tr><td>③</td><td>Stator installation pin hole</td><td>The pin holes that are used to install the stator.</td></tr>
<tr><td>④</td><td>Rotary platen</td><td>The DDR rotor.</td></tr>
<tr><td>⑤</td><td>Signal cable</td><td>
<table>
<tr><td>Pin No.</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr>
<tr><td>Pin assign-ment</td><td>PS+</td><td>PS-</td><td>-</td><td>-</td><td>-</td></tr>
<tr><td>Pin No.</td><td>6</td><td>7</td><td>8</td><td colspan="2">9</td></tr>
<tr><td>Pin assign-ment</td><td>-</td><td>+5 V</td><td>GND</td><td colspan="2">-</td></tr>
</table>


</td></tr>
<tr><td>⑥</td><td>Nameplate</td><td>The motor specifications.</td></tr>
<tr><td>⑦</td><td>Power cables</td><td>
<table>
<tr><td>Conductor color</td><td>White</td><td>Black</td><td>Red</td><td>Yellow/ Green</td></tr>
<tr><td>Description</td><td>U</td><td>V</td><td>W</td><td>Ground-ing</td></tr>
</table>
</td></tr>
</table>

ISMT1-160F45AB-A133X-INT

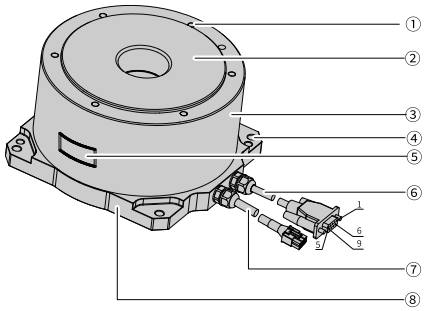



Figure 2-13 Components of ISMT1-160F45AB-A133X-INT

Table 2–3 Motor Components

No.	Component	Description
①	Rotary platen positioning pin hole	The positioning pin holes that are used to install the rotary platen.
②	Mounting flange for rotary platen	The mounting flange that is used to install the load-side rotary platen.
③	Rotary platen	The DDR rotor.
④	Stator installation pin hole	The pin holes that are used to install the stator.
⑤	Nameplate	The motor specifications.

<table>
<tr><th>No.</th><th>Component</th><th>Description</th></tr>
<tr><td>⑥</td><td>Signal cable</td><td>
<table>
<tr><td>Pin No.</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr>
<tr><td>Pin assign-ment</td><td>PS+</td><td>PS-</td><td>-</td><td>-</td><td>-</td></tr>
<tr><td>Pin No.</td><td>6</td><td>7</td><td>8</td><td colspan="2">9</td></tr>
<tr><td>Pin assign-ment</td><td>-</td><td>+5 V</td><td>GND</td><td colspan="2">-</td></tr>
</table>


</td></tr>
<tr><td>⑦</td><td>Power cables</td><td>
<table>
<tr><td>Conductor color</td><td>White</td><td>Black</td><td>Red</td><td>Yellow/ Green</td></tr>
<tr><td>Description</td><td>U</td><td>V</td><td>W</td><td>Ground-ing</td></tr>
</table>
</td></tr>
<tr><td>⑧</td><td>Stator</td><td>The motor stator.</td></tr>
</table>

2.5 MP Series Torque Motor

2.5.1 Model Description

M P 1 - 112 F 10A B - U3 1 3 X - INT
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

① Product family

M: Motor

② Product Type

P: Precision torque (direct-drive) motor

③ Product code

1: 1st generation

2: 2nd generation

④ Frame size

112: 112 mm diameter

140: 140 mm diameter

160: 160 mm diameter

175: 175 mm diameter

220: 220 mm diameter

⑥ Maximum output torque (N·m)

One letter and two digits

A: x 1

B: x 10

C: x 100

D: x 1000

E: x 10000

Example: 12 A: 12 N·m

⑦ Voltage class (V)

B: 200 V

D: 400 V

⑨ Installation accuracy

The mechanical deviation is lower than this value in both the axial and radial directions.

0: 3 μm max.

1: 5 μm max.

2: 10 μm max.

3: 30 μm max.

⑩ Connector type

1: Metal aviation connector

2: Cable gland - straight entry 3 m (U-type terminal)

3: Cable gland - straight entry 0.3 m (6-pin plastic terminal)

4: Cable gland - straight entry 3 m (U-type terminal)

⑤ **Basic structure**	⑧ **Encoder type**	⑪ **Cooling method**
S: Standard (cylindrical mounting flange) F: Flange (rectangle mounting flange)	One letter and one digit U3: 23-bit single-turn absolute encoder U4: 64-bit sine-cosine Hiperface interface absolute encoder U5: 128-bit sine-cosine Hiperface interface absolute encoder	X: Natural cooling F: Fan cooling L: Water cooling ⑫ **Model configuration** INT: Global version

2.5.2 Components

MP1-175S11BB-U333X-INT

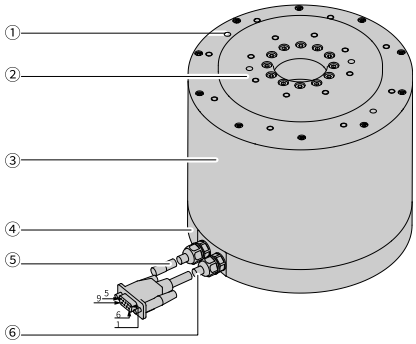



Figure 2-14 Components of MP1-175S11BB-U333X-INT

Table 2–4 Motor components

<table>
<tr><th>No.</th><th>Name</th><th>Remarks</th></tr>
<tr><td>①</td><td>Positioning pin hole of motor turntable</td><td>Used for mounting the turntable.</td></tr>
<tr><td>②</td><td>Mounting flange of the turntable</td><td>Used to install the flange to the turntable on the load end.</td></tr>
<tr><td>③</td><td>Turntable</td><td>DDR motor rotor</td></tr>
<tr><td>④</td><td>Stator</td><td>DDR motor stator</td></tr>
<tr><td>⑤</td><td>Power cable</td><td>
<table>
<tr><td>Conductor color</td><td>White</td><td>Black</td><td>Red</td><td>Yellow-green</td></tr>
<tr><td>Description</td><td>U</td><td>V</td><td>W</td><td>Ground-ing</td></tr>
</table>
</td></tr>
<tr><td>⑥</td><td>Signal cable</td><td>
<table>
<tr><td>Pin No.</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr>
<tr><td>Pin assign-ment</td><td>PS+</td><td>PS-</td><td>-</td><td>-</td><td>-</td></tr>
<tr><td>Pin No.</td><td>6</td><td>7</td><td>8</td><td colspan="2">9</td></tr>
<tr><td>Pin assign-ment</td><td>-</td><td>+5V</td><td>GND</td><td colspan="2">-</td></tr>
</table>


</td></tr>
</table>

MP1-112F10AB-U313X-INT

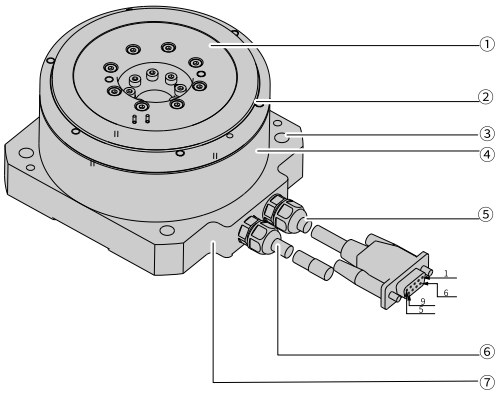



Figure 2-15 Components of MP1-112F10AB-U313X-INT

Table 2–5 Motor components

<table>
<tr><th>No.</th><th>Name</th><th>Remarks</th></tr>
<tr><td>①</td><td>Mounting flange of the turntable</td><td>Used to install the flange to the turntable on the load end.</td></tr>
<tr><td>②</td><td>Positioning pin hole of motor turntable</td><td>Used for mounting the turntable.</td></tr>
<tr><td>③</td><td>Positioning pin hole for stator</td><td>Used for mounting the stator.</td></tr>
<tr><td>④</td><td>Turntable</td><td>DDR motor rotor</td></tr>
<tr><td>⑤</td><td>Signal cable</td><td>
<table>
<tr><td>Pin No.</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr>
<tr><td>Pin assign-ment</td><td>PS+</td><td>PS-</td><td>-</td><td>-</td><td>-</td></tr>
<tr><td>Pin No.</td><td>6</td><td>7</td><td>8</td><td colspan="2">9</td></tr>
<tr><td>Pin assign-ment</td><td>-</td><td>+5V</td><td>GND</td><td colspan="2">-</td></tr>
</table>


</td></tr>
<tr><td>⑥</td><td>Power cable</td><td>
<table>
<tr><td>Conductor color</td><td>White</td><td>Black</td><td>Red</td><td>Yellow-green</td></tr>
<tr><td>Description</td><td>U</td><td>V</td><td>W</td><td>Ground-ing</td></tr>
</table>
</td></tr>
<tr><td>⑦</td><td>Stator</td><td>DDR motor stator</td></tr>
</table>

MP1-220S30BD-U323L-INT

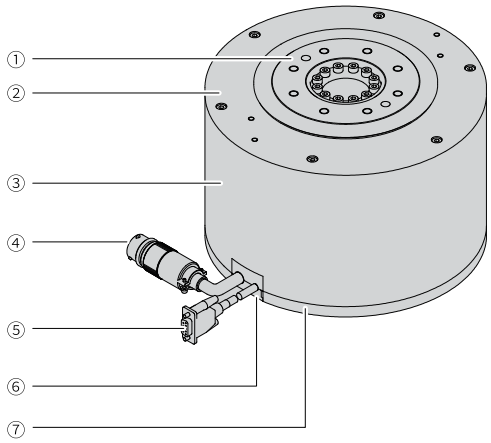



Figure 2-16 Components of MP1-220S30BD-U323L-INT

Table 2–6 Motor components

<table>
<tr><th>No.</th><th>Name</th><th>Remarks</th></tr>
<tr><td>①</td><td>Load mounting flange</td><td>Used to install the mounting flange on the load end.</td></tr>
<tr><td>②</td><td>Front end cover</td><td>Front end cover of the DDR motor stator</td></tr>
<tr><td>③</td><td>Enclosure</td><td>Stator enclosure of the DDR motor</td></tr>
<tr><td>④</td><td>Power cable</td><td>
<table>
<tr><td>Conductor color</td><td>White</td><td>Black</td><td>Red</td><td>Yellow-green</td></tr>
<tr><td>Description</td><td>U</td><td>V</td><td>W</td><td>Ground-ing</td></tr>
</table>
</td></tr>
<tr><td>⑤</td><td>Signal cable</td><td>
<table>
<tr><td>Pin No.</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td></tr>
<tr><td>Pin assign-ment</td><td>PS+</td><td>PS-</td><td>-</td><td>PTC+</td><td>P-T-C-</td></tr>
<tr><td>Pin No.</td><td>6</td><td>7</td><td>8</td><td colspan="2">9</td></tr>
<tr><td>Pin assign-ment</td><td>-</td><td>+5V</td><td>GND</td><td colspan="2">-</td></tr>
</table>


</td></tr>
<tr><td>⑥</td><td>Crimping block</td><td>Cable limit parts</td></tr>
<tr><td>⑦</td><td>Frame size</td><td>DDR motor mounting base</td></tr>
</table>

2.6 LMC Linear Module

2.6.1 Model description

LM C 1 - E 1 2 - 0500 PXX X - 6 003 G P 1 1 - N 221227 - INT
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱

① Product family

LM: Linear module

② Product type

C: Compact

③ Product iteration

1: First generation

2: Second generation

④ Flange size

A: 110 mm

B: 140 mm

C: 170 mm

D: 210 mm

E: 88 mm

F: 118 mm

G: 168 mm

H: 188 mm

K: 228 mm

L: 120 mm

⑤ Number of rotors

1: 1

2: 2

⑥ Color

1: Natural color

2: Black

⑩ Feedback type

1: 0.1 μm grating

2: 0.5 μm grating

3: 1 μm grating

4: 1 μm magnetic grating

5: Inovance communication-type absolute optical scale

6: Inovance communication-type magnetic scale

7: Inovance communication-type incremental optical scale

8: Others

9: Third-party RU2 series incremental grating with a resolution of 0.1 μm

A: third-party RU2 series incremental grating with a resolution of 0.5 μm

B: Third-party RU2 series incremental grating with a resolution of 1 μm

C: Third-party ABS series BiSS-C absolute grating with a resolution of 0.05 μm

D: Third-party ABS series BiSS-C absolute grating with a resolution of 0.1 μm

E: Third-party ABS series BiSS-C absolute grating with a resolution of 0.5 μm

F: Inovance ELOI series TTL incremental grating with a resolution of 0.05 μm

G: Inovance ELOI series TTL incremental grating with a resolution of 0.1 μm

H: Inovance ELOI series TTL incremental grating with a resolution of 0.5 μm

J: Inovance ELOI series TTL incremental grating with a resolution of 1 μm

⑬ Optoelectronic switch

Q: No optoelectronic switch

N: NPN type

P: PNP type

⑭ Guideway brand

1: THK

2: HIWIN

3: WON

4: SBC

⑮ Drag chain, side protective plate, and centralized lubrication system

0: Not equipped with a drag chain, a side protective plate, or a centralized lubrication system

1: Equipped with a vertical drag chain, without a side protective plate or a centralized lubrication system

2: Not equipped a drag chain or a centralized lubrication system, but with a side protective plate

3: Equipped with a vertical drag chain, a side protective plate, but without a centralized lubrication system

4: Not equipped with a drag chain or a side protective plate, but with a centralized lubrication system

5: Equipped with a vertical drag chain and a centralized lubrication system, but with a side protective plate

6: Not equipped with a drag chain, but with a side protective plate and a centralized lubrication system

7: Equipped with a vertical drag chain, a side protective plate, and a centralized lubrication system

⑦ **Itinerary** 0500: Active travel of 500 mm for single-rotor motors and 500 mm for multi-rotor motors	⑪ **Cable length** 003: 0.3 m 030: 3 m	⑯ **Design type** N: Normal R: Right mirror L: Left mirror
⑧ **Motor code** PXX: For details, see the motor code comparison table.	⑫ **Drive and Hall sensor** G: Without a Hall sensor, but with an SV670-INT P-type drive (200 V input) K: With a Hall sensor and an SV670-INT P-type drive (200 V input) M: Without a Hall sensor, but with an SV670-INT P-type drive (400 V input) P: With a Hall sensor and an SV670-INT P-type drive (400 V input)	⑰ **Design date** 221227: Date of the initial plan
⑨ **Motor wiring** 1: Y1 2: Y2 3: Y3 4: Y4 5: Y5 6: Y6		⑱ **Model/Type** INT: International version

2.6.2 Components

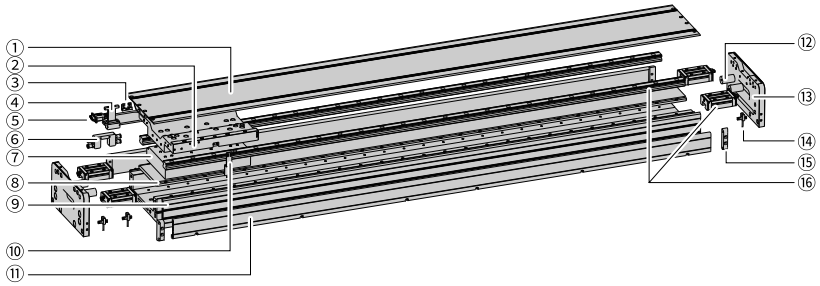


Figure 2-17 Components of LMC series linear motor

No.	Name	Remarks	No.	Name	Remarks
①	Dust-proof cover	Used to prevent dust.	⑨	Base	Indicates the linear module base.
②	Sliding table	Used to install the working load.	⑩	Photosensitive film	Detects light signals.
③	Clamp fixing block	Used to secure the wire harness.	⑪	Side protective plate	Used in the area in the protective side.
④	Mounting base of the read head	Used to hold the read head.	⑫	Urethane rubber	Used to dampen the shock of the motor.
⑤	Encoder	Used in a position feedback system.	⑬	End plate	Used for end protection and easy handling.
⑥	Centralized oil injection system	Used to supply the lubricating oil.	⑭	Optoelectronic switch	Software position limit
⑦	Integrated potting of the rotor	Provides driving force.	⑮	Fixing block on the side plate	Used to secure the components on the side plate.
⑧	Stator	Provides magnetic field.	⑯	Rail slider	Ensures linear motion of the rotor.

3 System Connection

3.1 System Composition

- The servo drive is directly connected to an industrial power supply, with no isolation such as a transformer. A fuse or circuit breaker therefore must be connected to the input power supply to prevent electric shock in the servo system. For the sake of safety, install a residual current device (RCD) to provide protections against overload and short circuit or a specialized RCD to protect the grounding cable.
- Do not start or stop the motor by using the electromagnetic contactor. As a high-inductance device, the motor may generate transient high voltage that may break down the contactor.
- When connecting an external power supply to the control circuit or a 24 VDC power supply, pay attention to the power capacity as insufficient power capacity will lead to insufficient supply current, resulting in failure of the servo drive or the brake. This is especially true when the power supply is used to power up multiple servo drives or brakes. The brake must be powered up by a 24 VDC power supply that matches the motor model and meets the brake power requirements.



Observe the following precautions when connecting the external braking resistor:

- The built-in braking resistor or jumper bar is not available in model S2R8. If an external braking resistor is required, connect it between terminals P ⊕ and C.
- Remove the jumper between terminals P ⊕ and D before using the external braking resistor. Failure to comply will result in overcurrent and damage the braking transistor.
- Do not connect the external braking resistor directly to the positive or negative pole of the bus. Failure to comply will damage the drive and result in a fire.
- Select a resistor with resistance higher than or equal to the minimum allowable value. Failure to comply will result in Er.201 (overcurrent) or damage the drive.
- Before you operate the servo drive, make sure that parameters H02.25 (braking resistor setting), H02.26 (power of external braking resistor), and H02.27 (resistance of external braking resistor) are properly set.
- Install the external braking resistor on incombustible matters, such as metal.

3.2 System Connection Diagram

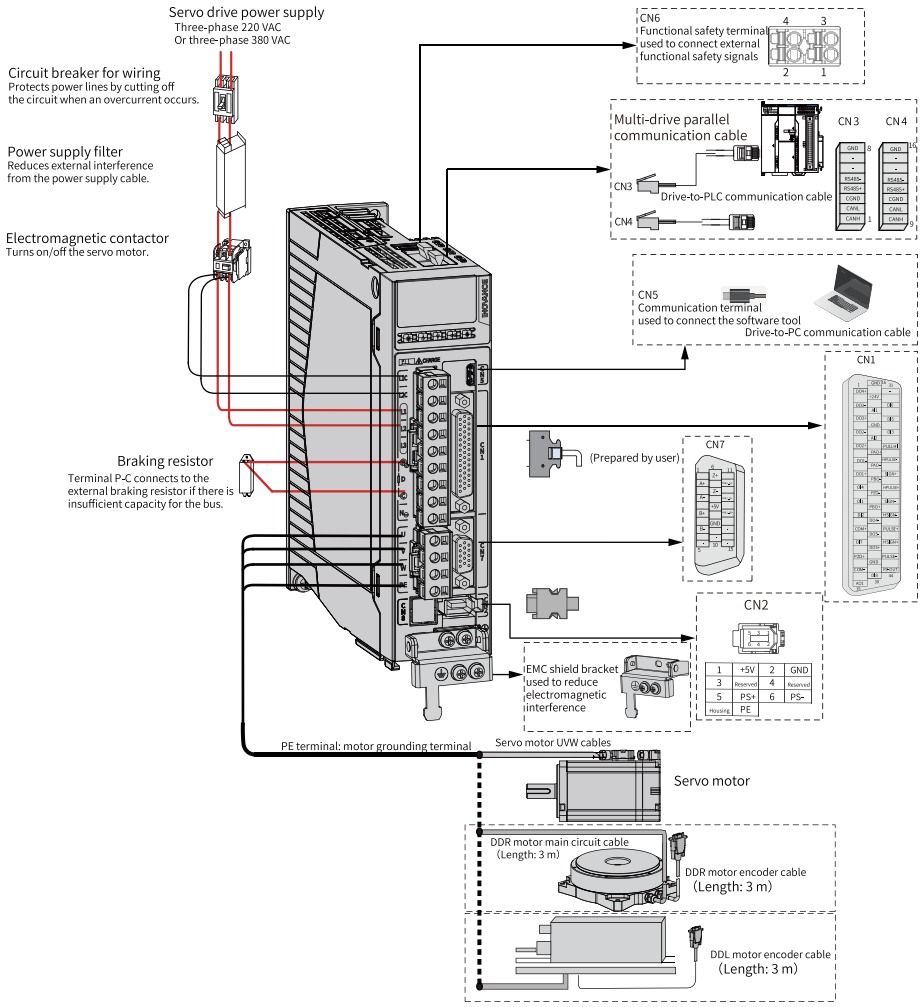


Figure 3-1 Example of system wiring

Note

- CN3 and CN4 are identical communication ports with the same pin assignment, and either can be used.
- CN6 (STO terminal) is only applicable to non-standard "-FS" models.
- When an external braking resistor is needed, remove the jumper bar between terminals P⊕ and D, and then connect the external braking resistor between terminals P⊕ and C. If an external braking resistor is not needed, short terminals P⊕ and D. Size A models are not equipped with built-in braking resistors or jumper bars between terminals P⊕ and D. Before you use the equipment, make sure that the braking resistor parameters H02.25, H02.26, and H02.27 are correctly set.

4 Servo Technical Specifications

4.1 Electrical Specifications

- Electrical specifications of single-phase 200 V drives

Item		Size A		Size C		Size D
Drive model		S1R6	S2R8	S5R5	S7R6	S012
Servo drive power (kW)		0.2	0.4	0.75	1.0	1.5
Max. applicable motor capacity (kW)		0.2	0.4	0.75	1.0	1.5
Power supply capacity (kVA)		1.4	2.8	4.6	6.0	8.0
Continuous output current (Arms)		1.6	2.8	5.5	7.6	12.0
Max. output current (Arms)		5.8	10.1	16.9	23.0	32.0
Main circuit	Continuous input current (Arms)	2.3	4.0	7.9	9.6	12.8
	Main circuit power supply	Single-phase 200 VAC to 240 VAC, -10% to +10%, 50 Hz/60 Hz				
	Heat generation (W)[1]	12	23.8	38.2	47.32	69.84
Control circuit	Control circuit power supply	Single-phase 200 VAC to 240 VAC, -10% to +10%, 50 Hz/60 Hz				
	Heat generation (W)[2]	16				
Braking Resistor	Resistance (Ω)	Optional	Optional	50	25	25
	Power (W)	Optional	Optional	50	80	80
	Min. allowable resistance of external braking resistor (Ω)	40	40	40	20	15
	Maximum braking energy absorbed by capacitor (J)	9.3	18.59	32.42	32.42	47.68
	Braking resistor	All models support built-in and external braking resistors. Only drives in size A do not come with a built-in braking resistor as standard.				
Cooling method		Naturally-ventilated		Air cooling		
Overvoltage category		III				
Max. input surge current at power-on (A)		18.65	18.65	9.325	9.325	12.433
3 τ (ms)[3] (3 × RC time constant)		23.4	46.8	163.2	163.2	180

Note

- The main circuit of S2R8, S5R5, S7R6, and S012 servo drives support single-phase 200 V power supplies without derating.
- The maximum braking energy that can be absorbed by capacitors is calculated based on the rated input of 220 VAC.

- Electrical specifications of three-phase 200 V drives

Item		Size A		Size C		Size D	Size E		
Drive model		S1R6	S2R8	S5R5	S7R6	S012	S018	S022	S027
Servo drive power (kW)		0.2	0.4	0.75	1.0	1.5	2.0	3.0	5.0
Max. applicable motor capacity (kW)		0.2	0.4	0.75	1.0	1.5	2.0	3.0	5.0
Power supply capacity (kVA)		1.21	2.42	3.84	5.05	6.68	8.33	10.42	20.08
Continuous output current (Arms)		1.6	2.8	5.5	7.6	12.0	18.0	22.0	27.0
Max. output current (Arms)		5.8	10.1	16.9	23.0	32.0	45	55	67.5
Main circuit	Continuous input current (Arms)	1.1	2.3	4.4	5.1	8.0	8.7	11.0	23.8
	Main circuit power supply	Three-phase 200 VAC to 240 VAC, -10% to +10%, 50 Hz/60 Hz							
	Heat generation (W)[1]	12	23.8	38.2	47.32	69.84	120	125	200
Control circuit	Control circuit power supply	Single-phase 200 VAC to 240 VAC, -10% to +10%, 50 Hz/60 Hz							
	Heat generation (W)[2]	16							
Braking Resistor	Resistance (Ω)	Optional	Optional	50	25	25	20	20	20
	Power (W)	Optional	Optional	50	80	80	100	100	100
	Min. allowable resistance of external braking resistor (Ω)	40	40	40	20	15	20	20	20
	Maximum braking energy absorbed by capacitor (J)	9.3	18.59	32.42	32.42	47.68	78.19	114.43	114.43
	Braking resistor	All models support built-in and external braking resistors. Only drives in size A do not come with a built-in braking resistor as standard.					Built-in braking resistor (external braking resistor supported)		
Cooling method		Naturally-ventilated		Air cooling					
Overvoltage category		III							
Max. input surge current (A)		18.65	18.65	9.325	9.325	12.433	12.433	12.433	12.433
3 τ (ms)[3] (3 × RC time constant)		23.4	46.8	163.2	163.2	180	295.2	432	432

Note

The maximum braking energy that can be absorbed by capacitors is calculated based on the rated input of 220 VAC.

- Three-phase 400 V drive

Item	Size C		Size D		Size E		
Drive model	T3R5	T5R4	T8R4	T012	T017	T021	T026
Servo drive power (kW)	1.0	1.5	2.0	3.0	5.0	6.0	7.5

Item		Size C		Size D		Size E		
Max. applicable motor capacity (kW)		1.0	1.5	2.0	3.0	5.0	6.0	7.5
Power supply capacity (kVA)		6.05	9.08	10.23	15.15	22.25	25.0	31.25
Continuous output current (Arms)		3.5	5.4	8.4	12.0	17.0	21.0	26.0
Max. output current (Arms)		11.0	14.0	20.0	30.0	42.5	52.5	65.0
Main circuit	Continuous input current (Arms)	2.4	3.6	5.6	8.0	12.0	16.0	21.0
	Main circuit power supply	Three-phase 380VAC to 480 VAC, -10% to +10%, 50 Hz/60 Hz						
	Heat generation (W)[1]	39.5	63.25	94.82	135.47	187.62	228.28	258.63
Control circuit	Control circuit power supply	Single-phase 380VAC to 480 VAC, -10% to +10%, 50 Hz/60 Hz						
	Heat generation (W)[2]	16						
Braking Resistor	Resistance (Ω)	100	100	50	50	35	35	35
	Power (W)	80	80	80	80	100	100	100
	Min. allowable resistance of external braking resistor (Ω)	80	60	45	40	35	25	25
	Maximum braking energy absorbed by capacitor (J)	36.06	43.79	64.40	64.40	105.62	154.56	154.56
	Braking resistor	Built-in braking resistor						
Cooling method		Air cooling						
Overvoltage category		III						
Max. input surge current (A)		18.65	18.65	24.86667	24.867	24.867	24.867	24.867
3 τ (ms)[3] (3 × RC time constant)		33.6	40.8	45	45	73.8	108	108

Note

The maximum braking energy that can be absorbed by capacitors is calculated based on the rated input of 400 VAC.

Note

- [1]: Main circuit heat generation refers to the amount of heat generated under rated output current of the servo drive.
- [2] Control circuit heat generation refers to the heat generated under rated input current of the servo drive.
- [3] RC time constant = Buffer resistor R x Bus capacitor C, which is used to indicate the power-on time (when the bus voltage reaches the stable state after a time of 3τ).
- Select the external braking resistor according to actual operating conditions. For details about how to select a braking resistor, see *"6.5 Braking Resistor" on page 168*.

4.2 Technical Specifications

Item			Description
Basic specifications	Control mode		IGBT SVPWM control, sine wave current drive mode
			200 V, 400 V: Single-phase/Three-phase full bridge rectification
	Encoder feedback		23-bit multi-turn absolute encoder, which can be used as an incremental encoder when no battery is connected Other supported encoders: **DDL motor:** Inovance communication encoder, ABZ incremental encoder (TTL signal) **DDR motor:** Inovance communication encoder, ABZ incremental encoder (TTL signal) **Servo motor:** Inovance communication encoder, ABZ incremental encoder (TTL signal), Nikon encoder, and TAMAGAWA encoder **Note:** For details, see section "Commissioning Objects" in *SV670P-INT Series Servo Drive Function Guide*.
	Conditions for use	Ambient/Storage temperature[1]	0℃ to 55℃ (average load ratio not exceeding 80% in ambient temperatures between 45℃ to 55℃) (non-frozen)/-40℃ to +70℃
		Operating/Storage humidity	Below 90% RH (no condensation)
		Vibration resistance	Operation: • Displacement amplitude: 5 Hz to 8.4 Hz: 3.5 mm • Acceleration amplitude: 1 g between 8.4 Hz and 200 Hz
			Product packaging: • 5 Hz to 100 Hz: 0.01 g^2/Hz • 200 Hz: 0.001 g^2/Hz • Grms = 1.14 g
		Shock resistance	19.6 m/s^2
		IP rating	IP20
			Note: Terminals are excluded, which have an IP rating of IP00.
		Pollution degree	PD2
		Protection class	Class I
		Altitude	The maximum altitude is 2000 m. • 1000 m and below: Derating is not needed. • Derating is needed for altitudes above 1000 m (derate 1% for every additional 100 m). • For altitudes above 2000 m, contact Inovance.
Speed/ Torque control mode	Performance	Speed control range	1 rpm to 10000 rpm (The lower speed limit must ensure that the motor can operate properly under the rated torque.)
		Torque control accuracy [2]	±2%
		Soft startup time setting	0s to 65s (Acceleration and deceleration can be set separately.)
	Input signal	Speed Reference Input	Analog input signal; digital input signal; DI signal combination is used to achieve selection of speed 0 to 15.
		Torque reference input	Analog input signal; digital input signal
		CANopen communication mode	PV mode/PT mode

Item				Description
Position control mode	Input signal	Pulse reference	Pulse input form	Four forms: Direction+Pulse, positive logic; Direction + Pulse, negative logic; Phase A + phase B quadrature pulse; CW/CCW pulse.
			Input forms	Differential input; open collector
			Pulse input frequency	Differential input: single: 4 Mpps, quadrature: 16 Mpps, pulse width ≥ 0.125 μs Open collector: max. single pulse frequency: 200 Kpps, pulse width must not be less than 2.5 μs
		Power supply for built-in open collector [3]		24 V (built-in 2.4 kΩ resistor)
		Multi-position reference selection		Position 0 to position 15 selectable through DI signal combination. This function can be assigned to other terminals.
		CANopen communication mode		PP mode/HM mode/IP mode
		CANlink communication mode		PP mode/HM mode/IP mode
	Position output	Output form		Phase A, phase B: differential output
				Phase Z: differential output or open collector output
		Frequency division ratio		Any frequency division
Input/ Output signal	DI signal	DI signal function assignment		8 DIs DI1 to DI6: regular DIs (rising edge (24 V input from low to high) input delay: 50 μs, falling edge (24 V input from high to low) input delay: 200 μs, voltage range: 20 V to 30 V). DI7 and DI8: fast DI (rising edge (24 V input from low to high) input delay: 10 μs, falling edge (24 V input from high to low) input delay: 50 μs, voltage range: 20 V to 30 V).
	DO signal	Output signal function assignment		5 DOs; with-load capacity: 50 mA; voltage range: 5 V to 30 V.
	Analog input signal			AI1 voltage input: 12-bit, -10 V to 10 V; max. allowable voltage: ±12 V. Sampling rate: 8 kHz if the gantry is disabled, 4 kHz if the gantry is enabled.
				AI2 of voltage type: 12-bit, -10 V to +10 V; maximum allowable voltage: ±12 V. Sampling rate: 8 kHz if the gantry is disabled, 4 kHz if the gantry is enabled.
	Analog output signal			AO1 voltage output range: -10 V to +10 V Output frequency: 8 kHz if the gantry is disabled, 4 kHz if the gantry is enabled.

Item			Description
Built-in functions	Overtravel (OT) prevention		The drive stops immediately when P-OT or N-OT signal is active.
	Electronic gear ratio		0.001 ≤ B/A ≤ 3355443.2
	Protective functions		Protection against overcurrent, overvoltage, undervoltage, overload, main circuit detection error, heatsink overheat, power supply phase loss, overspeed, encoder error, CPU error, parameter error, and others
	STO safety function[4]	Safety function types	Input block signal of STO functional safety module
		Applicable standard	IEC 61800-5-2:2016
	LED display		Main circuit CHARGE indicator, 5-digit LED display
	Vibration suppression		5 notches (including two adaptive notches) available, 50 Hz to 8000 Hz
	Usability functions		One-key parameter tuning, adaptive parameter tuning, intelligent parameter tuning, speed observer, and model tracking
	Communication function	Software tool commissioning	Type_C
		Multi-station communication	Modbus (RS485 interface), CANopen, and CANlink
		Number of multi-station communication axes	Up to 32 for RS485 and 127 for CANopen and CANlink
		Axis address setting	No physical knob, set through the software
		Function	Including status display, user parameter setting, monitored value display, fault tracing display, JOG and auto-tuning, and communication and motion control command setting
	Other functions		Gain tuning, alarm record, and jog

Note

- [1] Install the servo drive within this ambient temperature range. When it is installed inside a control cabinet, the temperature inside the cabinet must also be within this range.
- The voltage change and temperature change may result in amplifier deviations, which change the calculated resistance value. Such changes are reflected by the speed change. Speed changes caused by the voltage change and the temperature change will be indicated respectively by a percentage to the rated speed.
- [3] The internal open collector power supply is not electrically insulated from the control circuit in the servo drive.
- [4]: The STO safety function is only suitable for non-standard models (-FS).

4.3 Communication Specifications

Modbus RTU communication specifications

Item		Specification
Modbus Basic performance of slave	Link layer protocol	RS485
	Application layer protocol	Modbus RTU, GBT 19582.2-2008, using custom command area
	Baud rate	2400 kbps, 4800 kbps, 9600 kbps, 19200 kbps, 38400 kbps, 57600 kbps, and 115200 kbps
	Duplex mode	Half-duplex
	Data format	8-N-1 (8 data bits, no parity check, 1 stop bit), 8N1, 8N2, 801, and 8E1

CANopen communication specifications

Item		Specification
Specification	System specification	Description
Functions supported by parameters	Setting node address	The node address is set manually, with a maximum of 127. It cannot be assigned automatically
	Setting baud rate	The baud rate is set manually and cannot be assigned automatically.
	Switchover between CANopen and CANlink	CAN communication mode is set manually.
State machine description	Communication layer status description/display	Initializing, Pre-Operational, Operational, and Stopped
	Emergency error code description/display	Time-Out, State-Switch-Err, PDO-Length-Err, and Manu-Err
Error frame logging	Logs error frames.	Counts the number of NMT frames with an incorrect length.
		Counts the number of NMT frames with invalid commands.
		Count the number of heartbeat frames/node protection frames with an incorrect length.
Synchronization deviation detection	Multi-phase synchronization deviation detection	Deviation of 1/4 cycles
		Deviation of 1/2 cycles
		Deviation of 3/4 cycles
		Deviation of 1 cycle
		Deviation of 2 cycles
Baud rate	20 kbps to 1 Mbps	20 kbps, 50 kbps, 100 kbps, 125 kbps, 250 kbps, 500 kbps, and 1 Mbps
SYNC	SYNC producer	The SYNC producer.
	SYNC consumer	The SYNC consumer.
SDO	Enable domain upload/ download	Transmits data smaller than or equal to 4 bytes.
	SDO abort error	The SDO error code is reported according to different conditions.
	System specification	Segmented upload/download.
	Description	Transmits data larger than 4 bytes.
PDO	Synchronous TPDO/RPDO	The synchronization number ranges from 1 to 240. The total TPDO/RPDO quantity is 4 by default, which is configurable.
	Asynchronous TPDO/RPDO	Time triggered. The total TPDO/RPDO quantity is 4 by default, which is configurable.
EMCY	Emergency message	Heartbeat timeout, PDO length error, node state switchover error, and application layer error.
NMT	Bootup service	Supports online message transmission.
NMTErrCtl	Life guard	Optional node protection (not used with heartbeat production).
	Heartbeat consumer	Supports node heartbeat consumption.
	Heartbeat producer	Supports node heartbeat production.
Expert mode	Configure the PDO communication parameters and their mappings in parameters.	Manually configure PDO communication parameters and their mappings.

CANlink Communication Specifications

Specifications:

1. Drive disconnection protection is supported.
   Heartbeat protection (ED03.0)
2. Slave conflict detection is supported (E994.0).
3. Hot swap of slaves is supported.

Item		Specification
Basic perform-ance of slave	Communication protocol	CANlink protocol.
	Link layer protocol	CAN bus.
	CAN-ID type	29bit-CAN2.0B.
	Baud rate	500 kbit/s (default) 1 Mbit/s, 250 kbit/s, 125 kbit/s, 100 kbit/s, 50 kbit/s, and 20 kbit/s.
	Maximum number of stations	62
	CAN frame length	Standard frame: 44 to 108 bits + 23 bits = 67 to 131 bits. Extended frame: 64 to 128 bits + 28 bits = 92 to 156 bits.
	CanLink frame type	Remote frame, management frame, command frame, configuration frame, heartbeat frame, and data frame. • The remote frame is used for the master to scan CANlink devices to obtain device information. • Command frames and configuration frames are used to manage and configure the network. • The monitoring frame is used to monitor the status of the CANlink network. • Data frames are used for high-speed data exchange between different devices.
	Termination resistor	120 Ω

4.4 Dynamic Brake Characteristics

Calculating the approximate dynamic braking distance

The initial speed and load inertia, the dynamic braking distance can be estimated according to the motor model. The approximate value of the dynamic braking distance can be calculated by the following formula.

The maximum braking distance s (revolution) is shown as follows:

$$s = \frac{V_0}{60}\left(t_e + (\tau_1 + \tau_2 V_0^2)\left(1 + \frac{J_L}{J_M}\right)\right)$$

The coefficient is shown as follows:

$$\tau_1 = \frac{2R_s J}{3p_n^2 \Psi_f^2} = \frac{10000\pi^2 R_s J}{9K_e^2}$$

$$\tau_2 = \frac{\pi^2 L_d^2 J}{4050 R_s \Psi_f^2} = \frac{100 L_d^2 \pi^4 P_n^2 J}{243 R_s K_e^2}$$

$$\Psi_f = \frac{\sqrt{6} K_e}{100\pi P_n}$$

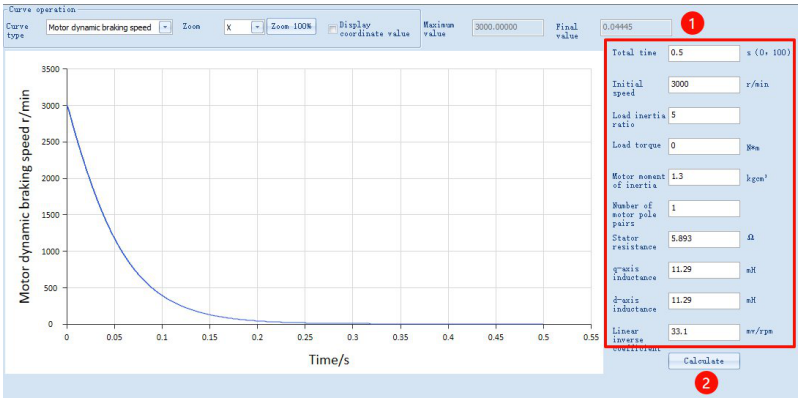
- V_0: Max. feedback speed
- t_e: Dynamic braking program and relay delay
- J_L: Load moment of inertia
- J_M: Motor moment of inertia
- P_n: Number of motor pole pairs
- R_s: Stator resistance (Ω)
- K_e: Kelvin, unit of thermodynamic temperature
- L_q, L_d: q-axis inductance (mH), d-axis inductance (mH)

Calculating accurate dynamic braking distance


Use InoDriverShop for calculating accurate dynamic braking distance.

The slip test procedure is as follows:


1. Set the corresponding parameters at ① according to the actual motor, load, and operation parameters. The time range of the x-coordinate of the calculation chart can be adjusted by setting the total time.
2. After the parameters are set, click "Calculate" at ② to generate dynamic braking measurement curves.



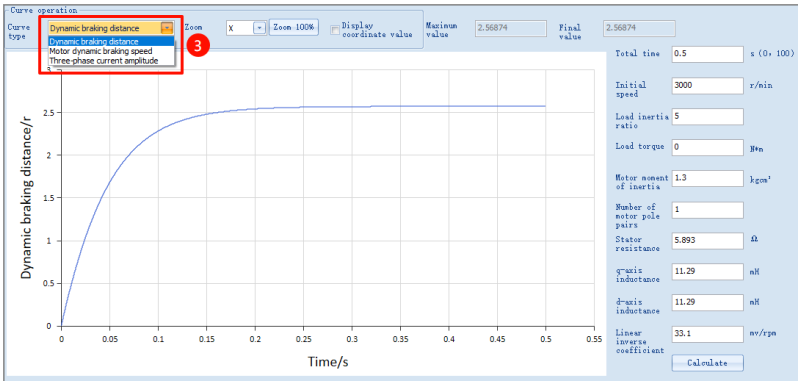3. This function provides three dynamic braking calculation curves: dynamic braking distance-time curve (relationship between braking distance and time during dynamic braking), dynamic braking speed-time curve (relationship between motor speed and time during dynamic braking), and three-phase current amplitude-time curve (relationship between three-phase current amplitude and time during dynamic braking). You can select the curve type at ③ based on the curve needed.



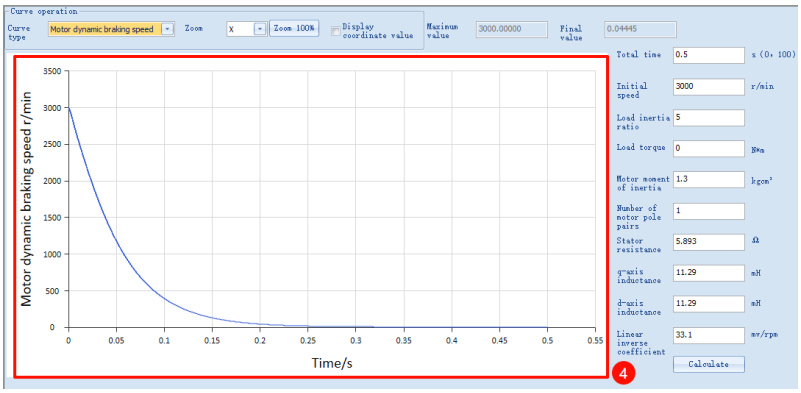4. After the curve type is selected, the curve is automatically generated at ④.



Application scenarios

To trigger dynamic braking at a motor speed of 3000 rpm and estimate how long can the motor stop (speed reduced to 0 rpm), do as follows. Set parameters at ① based on actual motor parameters. After calculation at ②, select "Dynamic motor braking speed" at ③, and a "Dynamic braking speed-time curve" will be generated automatically at ④.

4.5 Load Moment of Inertia

The load moment of inertia represents the inertia of the load. The larger the load moment of inertia is, the weaker the responsiveness is. An excessively high inertia may result in unstable motion. The allowable load moment of inertia of the motor is subject to a limit. The limit is provided as a guideline and varies with the motor driving conditions.

An overvoltage alarm may occur during deceleration if the load moment of inertia exceeds the allowable value. For servo drives with a built-in braking resistor, an overload alarm may be reported. In cases of such alarms, take one of the following measures:

- Reduce the torque limit value.
- Reduce the deceleration rate.
- Reduce the maximum speed.
- Install an external braking resistor if the alarm cannot be cleared using the above measures.

Caution


- Drives below 400 W does not provide a built-in braking resistor.
- Even if you use a built-in resistor, the energy generated in some conditions will exceed the allowable capacity loss (W) of the resistor. Therefore, an external braking resistor is required.

Table 4–1 Allowable load moment of inertia

Motor speed	Size A		Size C				Size D			Size E					
	S1R6	S2R8	S5R5	S7R6	T3R5	T5R4	S012	T8R4	T012	S018	S022	S027	T017	T021	T026
1,500 rpm	× 20														
3,000 rpm	× 20									× 10					

Motor speed	Size A		Size C				Size D			Size E					
	S1R6	S2R8	S5R5	S7R6	T3R5	T5R4	S012	T8R4	T012	S018	S022	S027	T017	T021	T026
4,500 rpm	× 20									× 5					Not supported
6,000 rpm	× 20									× 5					Not supported
7,000 rpm	× 20						Not supported								
Note: *Motor speed* indicates the maximum speed supported by the motor of the drive. For example, MS1H1/H4 supports 7,000 rpm, MS1H2 supports 6,000 rpm, and MS1H3 supports 4,500 rpm. When the speed exceeds 10 times of the inertia, an sufficient acceleration/deceleration time will cause drive alarms.															

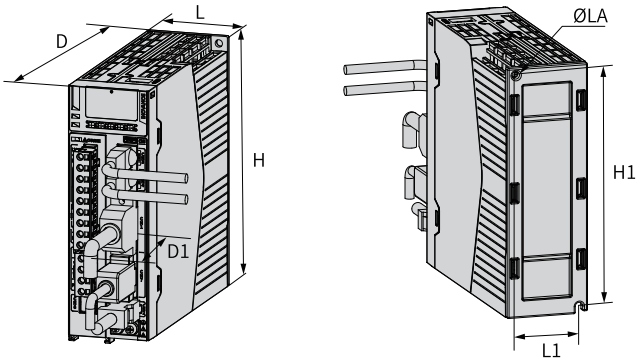4.6 Product Dimensions




Size	L	H	D	L1	H1	D1	ØLA	Recommended tightening torque	Weight
	Unit: mm (in.)							Unit: (N·m)	Unit: (kg)
A	45.5 (1.79)	170 (6.69)	150 (5.91)	33 (1.30)	161 (6.34)	75 (2.95)	2 × M4	1.2	0.96
C	55±1 (2.17±0.04)	170 (6.69)	173±1 (6.81±0.04)	44 (1.73)	160 (6.30)	75 (2.95)	2 × M4	1.2	1.3
D	80±1 (3.15±0.04)	170 (6.69)	183 (7.20)	71 (2.80)	160 (6.30)	75 (2.95)	3 × M4	1.2	1.8
E	90 (3.54)	250 (9.84)	230 (9.06)	78 (3.07)	240.5 (9.47)	75 (2.95)	4 × M4	1.2	3.6

5 Motor Technical Specifications

5.1 MS1-R-INT Series Servo Motor

5.1.1 General Specifications

5.1.1.1 Mechanical Characteristics

Item	Description
Duty type	S1 (Continuous duty)
Vibration class[1]	V15
Insulation resistance	500 VDC, above 10 MΩ
Excitation mode	Permanent magnet
Installation method	Flange
Thermal class	F (155℃)
Insulation voltage	1500 VAC, 1 minute (200 V class) 1800 VAC, 1 minute (400 V class)
IP rating	IP67 (excluding shaft opening and flying leads type motor connectors)
Direction of rotation	Rotates counterclockwise (CCW) when viewed from the shaft extension side with a forward run command.  CCW

Item		Description
Ambient condition	Ambient temperature	0°C to 40°C (non-freezing)
	Ambient humidity	20% RH to 80% RH (without condensation)
	Rated operating altitude	1000 m
	Altitude-based derating	• 1000 m and below: Derating is not needed. • For use above 1000 m, derate according to *"5.1.1.3 Derating Characteristics" on page 49*. For altitudes above 2000 m, install an isolation transformer at the power input end.
	Installation location	• Free from corrosive or explosive gases • Well ventilated with minimum amount of dust, waste, and moisture • Convenient for inspection and cleaning • Away from sources that may generate strong magnetic field • Away from heating sources such as heating stoves. • Use a motor with oil seal in places with grinding fluid, oil mist, iron powders or cuttings. • Oil seal protection capability: The oil seal is only dust-proof. It cannot withstand the intrusion of oil for a long term. For direct-connected reducer applications requiring long-term oil resistance on the motor oil seal, contact Inovance technical support. • Not applicable to vacuum environments. • Not applicable to inching (not full-turn) [2] and may be stuck. • The motor with brake may generate a pattering sound. • In upstream applications of the motor, ensure the force applied on the shaft end is lower than the allowable axial force and radial force of the motor. • The system should avoid continuous operation at a natural frequency. Exceeding the allowable vibration value may damage the system.
	Storage environment	Observe the following requirements for storing a de-energized motor. • Temperature: -20°C to +60°C (non-freezing) • Storage humidity: 20% to 80% RH (without condensation)
Shock resistance [3][5]	Shock acceleration (taking flange side as standard)	490m/s^2
	Number of shocks	2
Vibration resistance [4][5]	Vibration acceleration (taking flange side as standard)	• Radial 49 m/s^2 • Axial 24.5 m/s^2

Note

- [1] Vibration class V15 indicates that the amplitude of vibration is lower than 15 μm when an individual motor rotates at rated values.
- [2] For applications that require the motor shaft to swing back and forth at a certain angle, contact Inovance.
- [3] The resistance for shock in the vertical direction when the motor is mounted with the shaft in a horizontal position is shown in the preceding table.
- [4] The vertical, side-to-side, and front-to-back resistance for vibration in three directions when the servo motor is mounted with the shaft in a horizontal position is shown in the preceding table.
- [5] The vibration intensity applied on the motor is affected by the transmission structure, alignment accuracy, mounting conditions, and external vibration. These factors may enhance the vibration applied on the motor. When the maximum allowable vibration limit is exceeded, the motor may fail. Therefore, take necessary measures to limit resonance.
- The vibration intensity applied on the motor varies with applications.




Figure 5-1 Shock applied to the servo motor

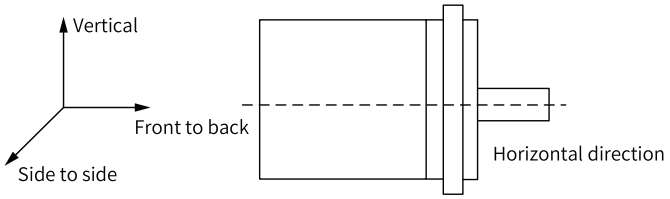


Figure 5-2 Vibration applied to the servo motor

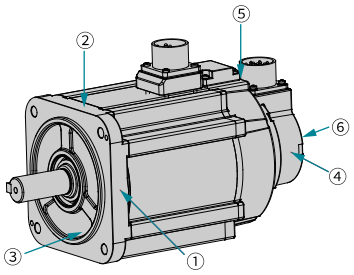


Figure 5-3 Max. allowable vibration limit of the motor

Direction	Measuring point	Limit value (10 Hz to 2000 Hz)
Radial	①②④⑤	49m/s²
Axial	③⑥	24.5m/s²

Note

The preceding vibration/shock standards cannot be applied for a long term. For long-term application, contact Inovance.

5.1.1.2 Overload Characteristics

The drive is compliant with NEC and CEC requirements and equipped with protective functions against overload and overtemperature.

The following overload protection curve applies to hot start at an ambient temperature of 40℃, which cannot guarantee continuous duty in cases of 100% output or above. During use, keep the effective torque of the load within the continuous duty zone.

To protect different load motors, set the motor overload protection gain based on the overload capacity of the motor. Use the default gain in general conditions. However, when one of the following conditions occurs, change the gain based on actual motor temperature:

- The motor operates in environments with high temperature.
- The motor is in cyclic motion featuring a short motion cycle and frequent acceleration/ deceleration.
- Overload thermal protection only occurs during continuous energized operation. You need to check the motor temperature when the drive is powered off.

The motor overload protection curve is shown in the following figure.

- **MS1H1/H4 (frame size 40/60/80)**

Load ratio (%)	Operating time (s)
120	230
130	80
140	40
150	30
160	20
170	17
180	15
190	12
200	10
210	8.5
220	7
230	6
240	5.5
250	5
300	3
350	2

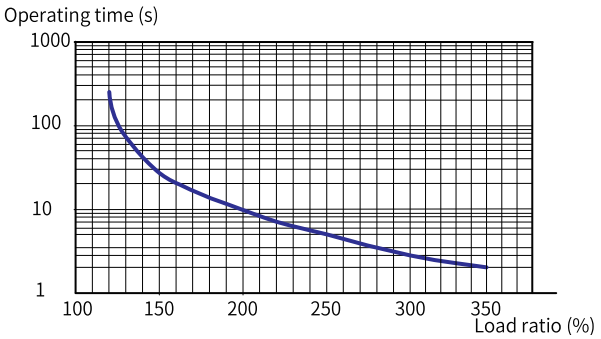


Figure 5-4 MS1H1/H4 (frame size 40/60/80) series motor overload curve

Note

The maximum torque of H1 and H4 models is the rated torque x 3.5.

- **MS1H2/MS1H3**

Load ratio (%)	Operating time (s)
115	6000
120	2533
125	1226
130	915
135	769
140	527
145	352
150	221
155	128
160	99
165	83
170	67
175	55
180	49
185	45
190	41
195	38
200	34
205	31
210	28
215	24
220	22
225	21
230	19
235	18
240	16
245	14
250	13
255	12
260	11
265	10
270	9
275	9
280	8
285	7
290	6
295	5
300	5

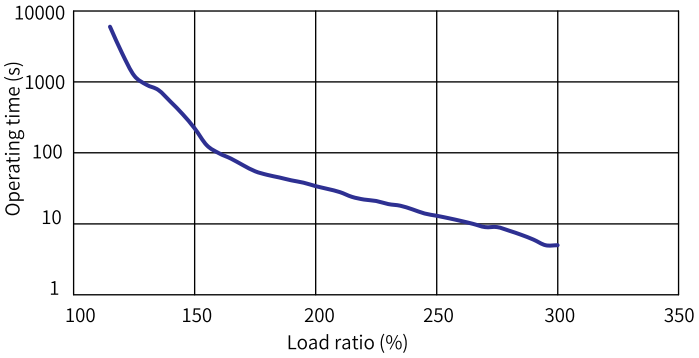


Figure 5-5 Overload curve of MS1H2 and MS1H3 series motors

Note

- The maximum torque of H2 models is the rated torque x 3.
- The maximum torque of H3 models is the rated torque x 2.5.

- **MS1H1-03B30CB-U210R-S**

Load ratio (%)	Operating time (s)
120	75.00
130	43.39
140	27.97
150	19.84
160	15.10
170	15.02
180	9.82
190	8.12
200	6.70
210	5.62
220	4.79
230	4.14
240	3.63
250	3.22
260	2.89
270	2.61
280	2.38
290	2.18
300	2.01
310	1.86
320	1.73
330	1.60
340	1.50
350	1.40

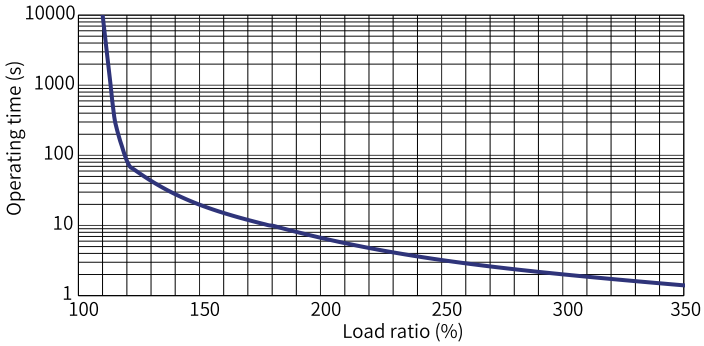


Figure 5-6 Overload curve of MS1H1-03B30CB-U210R-S series motors

5.1.1.3 Derating Characteristics


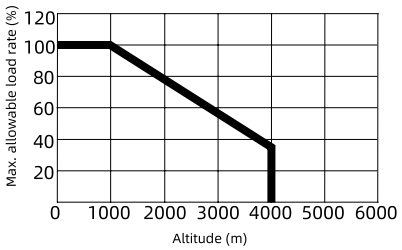


Figure 5-7 Altitude-based derating curve

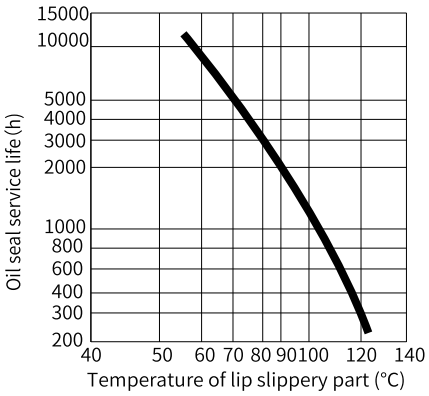5.1.1.4 Temperature Curve of the Oil Seal



5.1.1.5 Load Moment of Inertia

The load moment of inertia represents the ratio of the load inertia to the rotor inertia. The higher the load inertia ratio, the weaker the responsiveness will be. An excessively high inertia ratio can result in unstable operation. The allowable load inertia ratio of the servo motor is limited. The value is a general standard and varies according to the driving conditions of the servo motor.

An overvoltage alarm may occur during deceleration if the load moment of inertia exceeds the allowable value. For servo drives with a built-in braking resistor, an overload alarm may be reported. In cases of such alarms, take one of the following measures:

- Reduce the torque limit value.
- Reduce the deceleration rate.

- Reduce the maximum speed.
- Install an external braking resistor if the warning cannot be cleared using the above measures.


Caution

- For the built-in braking resistor of the drive, see section "Components".
- Even if you use a built-in resistor, the energy generated in some regenerative conditions may exceed the allowable capacity loss (W) of the resistor. Therefore, an external braking resistor is required.


5.1.2 Motor Model Selection

5.1.2.1 Selection Precautions

- Description of torque-speed characteristics curves:
  - All parameters and torque-speed characteristic values are subject to the conditions that the motor works with an Inovance servo drive and the armature coil temperature is 20°C.
  - Continuous working area: refers to a series of states in which the motor can operate safely and continuously, and the actual torque must be located in this area.
  - Intermittent duty zone: refers to a series of states in which the motor can run within a short period of time when the actual torque is greater than the rated torque.
- The characteristic values are obtained in cases where the motor is installed with the following heatsink (unit: mm):
  - MS1H1 to MS1H4: 250 × 250 × 6 (aluminum)
  - MS1H2-10C to 25C: 400 × 400 × 20 (steel)
  - MS1H2-30C to 50C: 400 × 400 × 20 (steel)
  - MS1H3-85B to 18C: 400 × 400 × 20 (steel)
  - MS1H3-29C to 55C: 550 × 550 × 30 (aluminum)
  - MS1H3-75C: 700 × 700 × 30 (aluminum)
- Radial and axial loads of the motor:



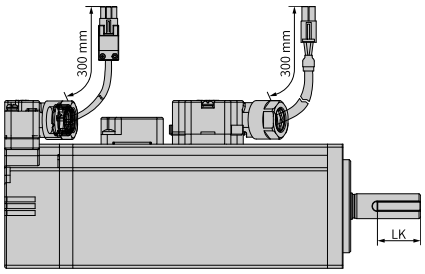- Dimensions of flying leads type motors
  Flying leads type motors with frame size 80 and below (model ended with "-S") provide a drain wire of about 300 mm in length, as shown in the following figure.





- As shown in the preceding figure, the product is marked with an LK value in the dimension diagram in the section of each model. LK indicates the length of the shaft key.
- MS1H3 (130-flange and 180-flange) comes with a key slot. When the operating speed is above 3000 rpm, the motor must run with the keyway. If you need to run the motor without the keyway at speeds higher than 3000 rpm, contact Inovance.

Note

- Values inside the parentheses in the sections corresponding to the models are parameters of the servo motor carrying a brake.
- The motor with oil seal must be derated by 10% during use.
- Use your own DC power supply as 24 V power supply of the brake. For the cable connecting the DC power supply to the motor brake, it is recommended to use cables with a diameter of 0.2 mm^2 or above for motors with low power of 750 W or below. It is recommended to use cables with a diameter of 0.8 mm^2 or above for motors with a power of 750 W or above. The brake cannot share the power supply with other appliances to prevent the voltage or current from falling due to the simultaneous operation of other electrical appliances, which may result in brake malfunction.
- Do not share a power supply with multiple brakes. Otherwise, the coil is short-circuited after one brake is dry-worn, causing failures to start the brakes that are connected to the power supply in parallel.
- The brake apply time and release time vary with the discharge circuit. Check the actual action delay of the product during use. The holding brake cannot be used for braking purpose.

5.1.2.2 Low Inertia and Small Capacity (MS1H1)

5.1.2.2.1 MS1H1-05B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.05		
Rated voltage (V)	220		
Rated torque (N·m)	0.16		
Maximum torque (N·m)	0.56		
Rated frequency (Hz)	250		
Rated current (A)	1.2		Heatsink-based derating curve
Maximum current (A)	4.8		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.15		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	0.018 ± 10%	
	Motor with brake	0.0208 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

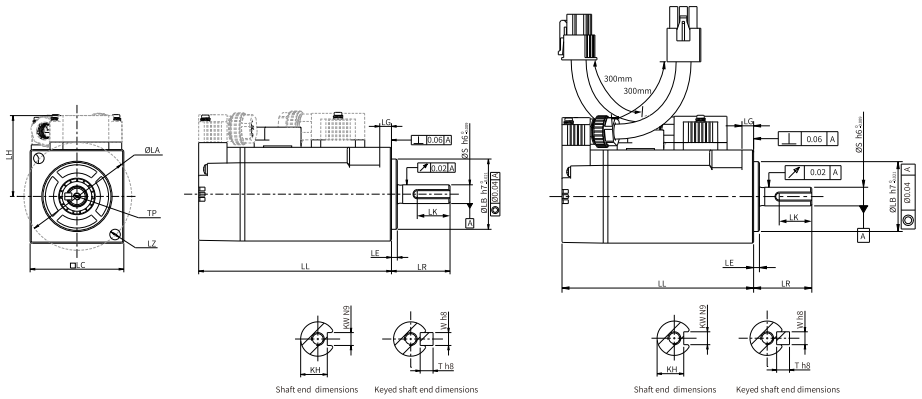Dimensions (mm)



LL	LC	LR	LA	LZ	LH	LG	LE	
54.5 (81.8)	40	25 ± 0.5	46	2 × ϕ4.5	34.5	5	2.5 ± 0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 6	140 - 0.36	$6.2^{0}_{-0.1}$	3	3	3	0.26 (0.43)

5.1.2.2.2 MS1H1-10B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.1		
Rated voltage (V)	220		
Rated torque (N·m)	0.32		
Maximum torque (N·m)	1.12		
Rated frequency (Hz)	250		
Rated current (A)	1.2		Heatsink-based derating curve
Maximum current (A)	4.8		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.30		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.0316 ± 10%	
	Motor with brake	0.0345 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

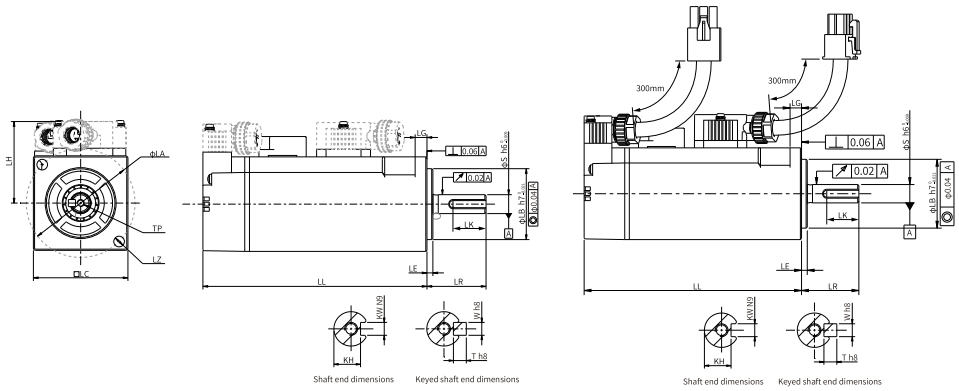Dimensions (mm)



LL	LC	LR	LA	LZ	LH	LG	LE	
67 (94.3)	40	25 ± 0.5	46	2 × ϕ4.5	34.5	5	2.5 ± 0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 6	140 - 0.36	$6.2^{0}_{-0.1}$	3	3	3	0.35 (0.52)

5.1.2.2.3 MS1H1-20B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	60		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.2		
Voltage (V)	220		
Rated torque (N·m)	0.64		
Maximum torque (N·m)	2.24		
Rated frequency (Hz)	250		
Rated current (A)	1.5		Heatsink-based derating curve
Maximum current (A)	5.3		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.51		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.094 ± 10%	
	Motor with brake	0.106 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

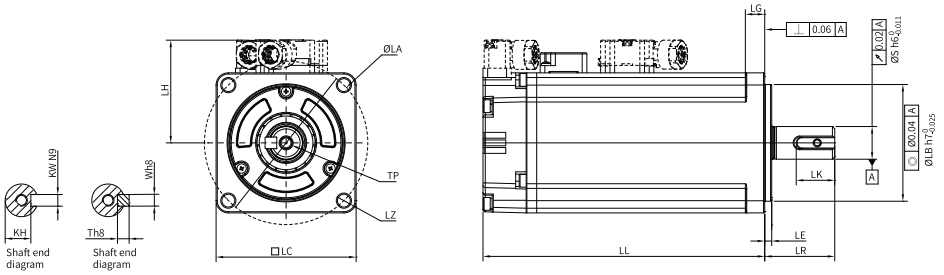Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	75.5 (103)	30 ± 0.5	70	4 × ϕ5.5	44	8.0	3 ± 0.5	
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
50	14	M5 × 12	160 -0.53	110 -0.1	5	5	5	0.80 (1.17)

5.1.2.2.4 MS1H1-40B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	60		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.4		
Voltage (V)	220		
Rated torque (N·m)	1.27		
Maximum torque (N·m)	4.45		
Rated frequency (Hz)	250		
Rated current (A)	2.5		Heatsink-based derating curve
Maximum current (A)	9.8		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.57		
Rotor moment of inertia (kg·cm²)	Motor without brake	0.145 ± 10%	
	Motor with brake	0.157 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

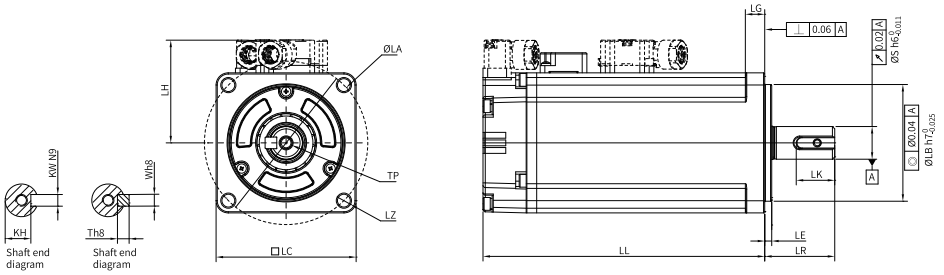Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	93 (121)	30 ± 0.5	70	4 × ϕ5.5	44	8.0	3 ± 0.5	
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
50	14	M5 × 12	160 -0.53	110 -0.1	5	5	5	1.11 (1.48)


5.1.2.2.5 MS1H1-55B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.55		
Voltage (V)	220		
Rated torque (N·m)	1.75		
Maximum torque (N·m)	6.13		
Rated frequency (Hz)	250		
Rated current (A)	3.9		Heatsink-based derating curve
Maximum current (A)	15		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.51		
Rotor moment of inertia (kg·cm^2)	Motor without brake	0.55 ± 10%	
	Motor with brake	-	

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

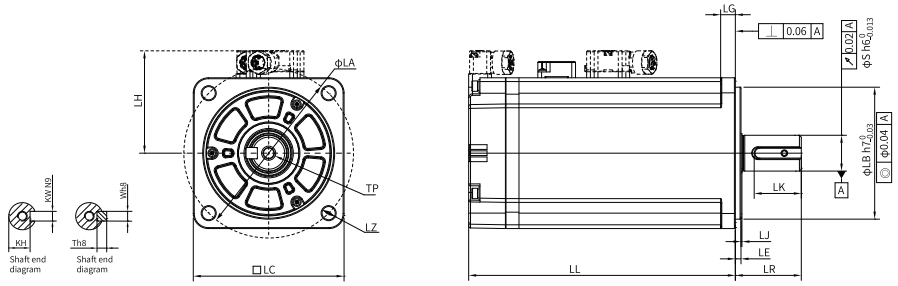Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	96.7	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 -0.62	15.50 -0.1	6	6	6	1.88

5.1.2.2.6 MS1H1-75B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.75		
Voltage (V)	220		
Rated torque (N·m)	2.39		
Maximum torque (N·m)	8.36		
Rated frequency (Hz)	250		
Rated current (A)	4.4		Heatsink-based derating curve
Maximum current (A)	16.9		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.62		
Rotor moment of inertia (kg·cm²)	Motor without brake	0.68 ± 10%	
	Motor with brake	0.71 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

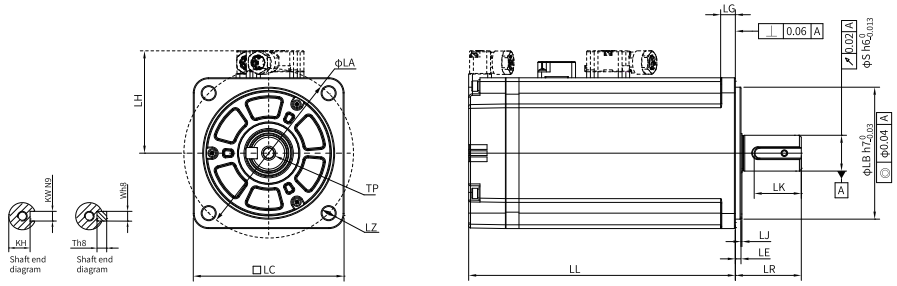Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	107.3 (141.5)	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 - 0.62	15.50 -0.1	6	6	6	2.22 (2.88)

5.1.2.2.7 MS1H1-10C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	1.0		
Voltage (V)	220		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	11.13		
Rated frequency (Hz)	250		
Rated current (A)	6.2		Heatsink-based derating curve
Maximum current (A)	24		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.59		
Rotor moment of inertia (kg·cm²)	Motor without brake	0.82 ± 10%	
	Motor with brake	0.87 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147


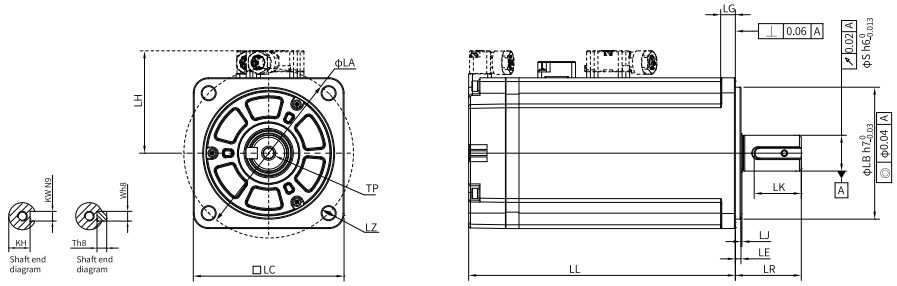
Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	119.2 (153.4)	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 -0.62	15.50 -0.1	6	6	6	2.61 (3.27)

5.1.2.3 Low Inertia and Medium Capacity (MS1H2)

5.1.2.3.1 MS1H2-10C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia and capacity	low inertia, medium capacity		
Rated power (kW)	1.0		
Voltage (V)	220		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	9.54		
Rated frequency (Hz)	250		
Rated current (A)	6.4		Heatsink-based derating curve
Maximum current (A)	23		
Rated speed (rpm)	3000		
Maximum Speed (rpm)	6000		
Torque coefficient (N·m/A)	0.54		
Rotor moment of inertia (kg·cm²)	Motor without brake	1.78±10%	
	Motor with brake	2.6±10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable loads



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

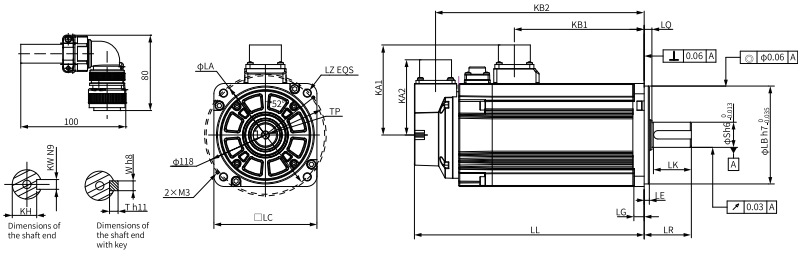Product dimensions (in mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	144 (172)	45±1	115	4 × ϕ7	88	75	73	123.5 (151.5)	10	5±0.3
LQ	LB		S	TP	LK	KH	KW	W	T	Weight (kg)
7.5±0.75	95		24	M8 × 16	$35^{0}_{-0.62}$	$20^{0}_{-0.2}$	8	8	7	3.85 (4.9)

5.1.2.3.2 MS1H2-10C30CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	1.0		
Voltage (V)	380		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	9.54		
Rated frequency (Hz)	250		
Rated current (A)	3.3		Heatsink-based derating curve
Maximum current (A)	11		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.07		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	1.78 ± 10%	
	Motor with brake	2.6 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

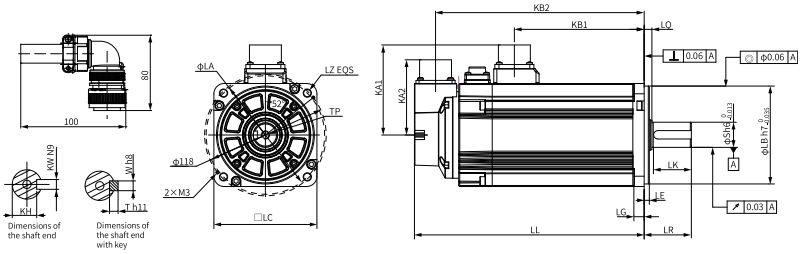Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	144 (172)	45 ± 1	115	4 × ϕ7	88	75	73	123.5 (151.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	3.85 (4.9)

5.1.2.3.3 MS1H2-15C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	1.5		
Voltage (V)	220		
Rated torque (N·m)	4.9		
Maximum torque (N·m)	14.7		
Rated frequency (Hz)	250		
Rated current (A)	8.6		Heatsink-based derating curve
Maximum current (A)	32		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.62		
Rotor moment of inertia (kg·cm²)	Motor without brake	2.35 ± 10%	
	Motor with brake	3.17 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196


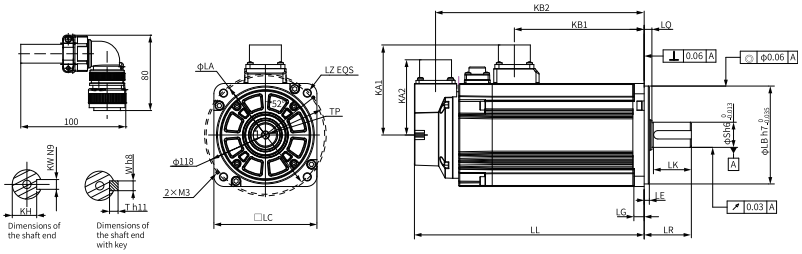
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	161 (189)	45 ± 1	115	4 × ϕ7	88	92	73	140.5 (168.5)	10	5 ± 0.3

LQ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95	24	M8 × 16	350 - 0.62	200 - 0.2	8	8	7	4.65 (5.75)

5.1.2.3.4 MS1H2-15C30CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	1.5		
Voltage (V)	380		
Rated torque (N·m)	4.9		
Maximum torque (N·m)	14.7		
Rated frequency (Hz)	250		
Rated current (A)	4.2		Heatsink-based derating curve
Maximum current (A)	14		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.28		
Rotor moment of inertia (kg·cm²)	Motor without brake	2.35 ± 10%	
	Motor with brake	3.17 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

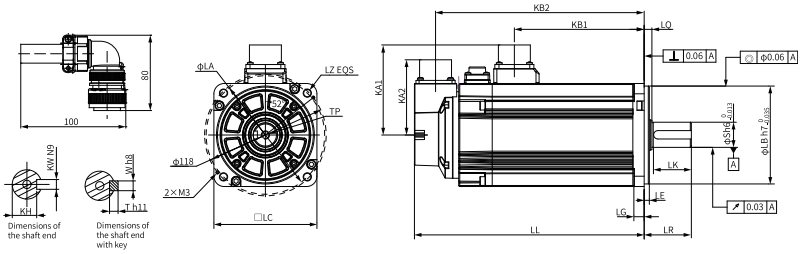Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	161 (189)	45 ± 1	115	4 × ϕ7	88	92	73	140.5 (168.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 - 0.62	200 - 0.2	8	8	7	4.65 (5.75)

5.1.2.3.5 MS1H2-20C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.0		
Voltage (V)	220		
Rated torque (N·m)	6.36		
Maximum torque (N·m)	19.1		
Rated frequency (Hz)	250		
Rated current (A)	11.3		Heatsink-based derating curve
Maximum current (A)	42		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.60		
Rotor moment of inertia (kg·cm²)	Motor without brake	2.92 ± 10%	
	Motor with brake	3.74 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196


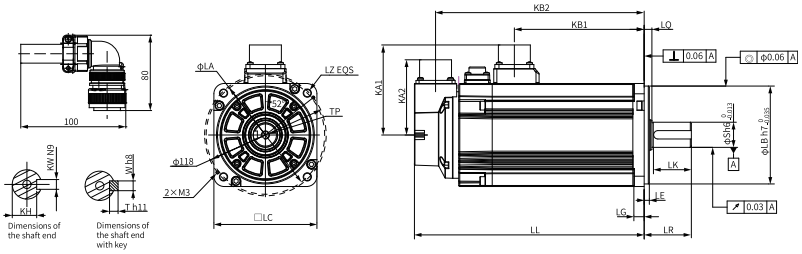
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	177 (205)	45 ± 1	115	4 × ϕ7	88	108	73	156.5 (184.5)	10	5 ± 0.3

LQ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95	24	M8 × 16	350 $^{-0.62}$	200 $^{-0.2}$	8	8	7	5.5 (6.55)

5.1.2.3.6 MS1H2-20C30CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.0		
Voltage (V)	380		
Rated torque (N·m)	6.36		
Maximum torque (N·m)	19.1		
Rated frequency (Hz)	250		
Rated current (A)	5.6		Heatsink-based derating curve
Maximum current (A)	20		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.19		
Rotor moment of inertia (kg·cm^2)	Motor without brake	2.92 ± 10%	
	Motor with brake	3.74 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196


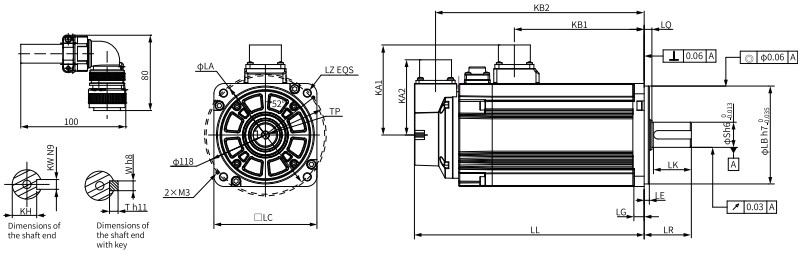
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	177 (205)	45 ± 1	115	4 × ϕ7	88	108	73	156.5 (184.5)	10	5 ± 0.3

LQ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95	24	M8 × 16	350 $^{-0.62}$	200 $^{-0.2}$	8	8	7	5.5 (6.55)

5.1.2.3.7 MS1H2-25C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.5		
Voltage (V)	220		
Rated torque (N·m)	7.96		
Maximum torque (N·m)	23.9		
Rated frequency (Hz)	250		
Rated current (A)	14.7		Heatsink-based derating curve
Maximum current (A)	53		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.60		
Rotor moment of inertia (kg·cm^2)	Motor without brake	3.49 ± 10%	
	Motor with brake	4.3 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

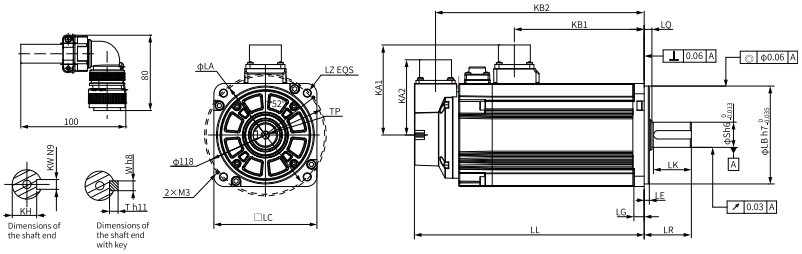Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	195 (223)	45 ± 1	115	4 × ϕ7	88	126	73	174.5 (202.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	6.3 (7.35)

5.1.2.3.8 MS1H2-25C30CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.5		
Voltage (V)	380		
Rated torque (N·m)	7.96		
Maximum torque (N·m)	23.9		
Rated frequency (Hz)	250		
Rated current (A)	7.2		Heatsink-based derating curve
Maximum current (A)	26		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.18		
Rotor moment of inertia (kg·cm²)	Motor without brake	3.49 ± 10%	
	Motor with brake	4.3 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

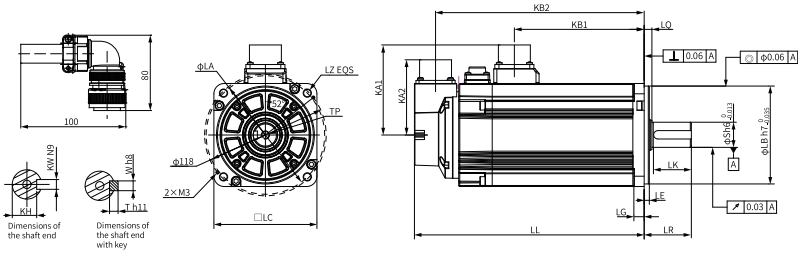Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	195 (223)	45 ± 1	115	4 × ϕ7	88	126	73	174.5 (202.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	6.3 (7.35)

5.1.2.3.9 MS1H2-30C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	3.0		
Voltage (V)	220		
Rated torque (N·m)	9.8		
Maximum torque (N·m)	24.5		
Rated frequency (Hz)	150		
Rated current (A)	16.6		Heatsink-based derating curve
Maximum current (A)	55		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.67		
Rotor moment of inertia (kg·cm²)	Motor without brake	6.4 ± 10%	
	Motor with brake	9.38 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

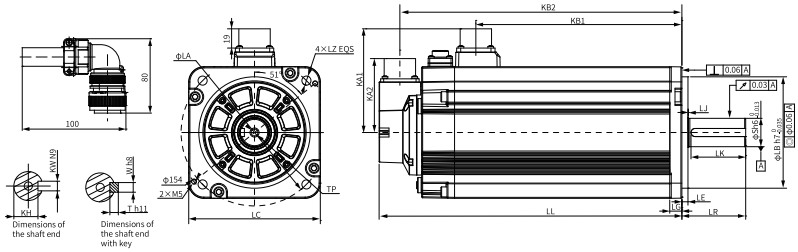Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	198 (223)	63 ± 1	145	4 × ϕ9	102.4	127.5	73	177.5 (202.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 $^{0}_{-0.62}$	240 $^{0}_{-0.2}$	8	8	7	10.0 (11.9)

5.1.2.3.10 MS1H2-30C30CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	3.0		
Voltage (V)	380		
Rated torque (N·m)	9.8		
Maximum torque (N·m)	29.4		
Rated frequency (Hz)	150		
Rated current (A)	8.9		Heatsink-based derating curve
Maximum current (A)	29		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.25		
Rotor moment of inertia (kg·cm^2)	Motor without brake	6.4 ± 10%	
	Motor with brake	9.38 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

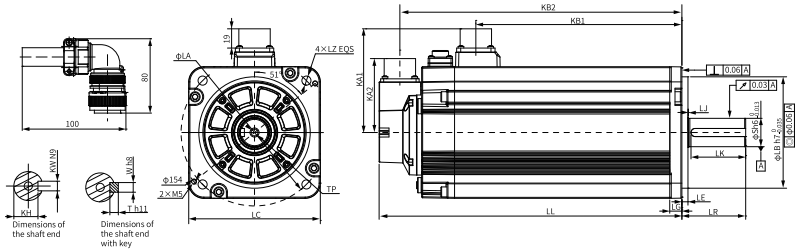Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	198 (223)	63 ± 1	145	4 × ϕ9	102.4	127.5	73	177.5 (202.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	10.0 (11.9)

5.1.2.3.11 MS1H2-40C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	4.0		
Voltage (V)	220		
Rated torque (N·m)	12.6		
Maximum torque (N·m)	31.5		
Rated frequency (Hz)	150		
Rated current (A)	22		Heatsink-based derating curve
Maximum current (A)	67.5		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.65		
Rotor moment of inertia (kg·cm^2)	Motor without brake	9 ± 10%	
	Motor with brake	11.98 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

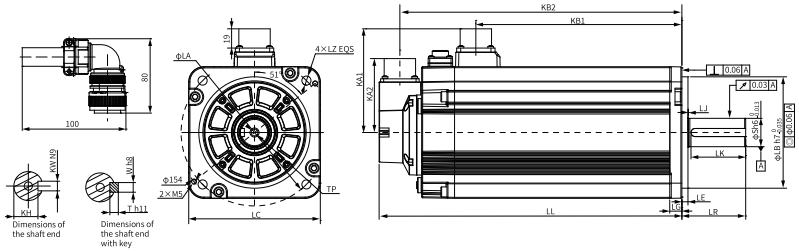Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	236 (261)	63 ± 1	145	4 × ϕ9	102.4	165.5	73	215.5 (240.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 $^{0}_{-0.62}$	240 $^{0}_{-0.2}$	8	8	7	13.2 (15.1)

5.1.2.3.12 MS1H2-40C30CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	4.0		
Voltage (V)	380		
Rated torque (N·m)	12.6		
Maximum torque (N·m)	37.8		
Rated frequency (Hz)	150		
Rated current (A)	13.5		Heatsink-based derating curve
Maximum current (A)	42.5		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.06		
Rotor moment of inertia (kg·cm^2)	Motor without brake	9 ± 10%	
	Motor with brake	11.98 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

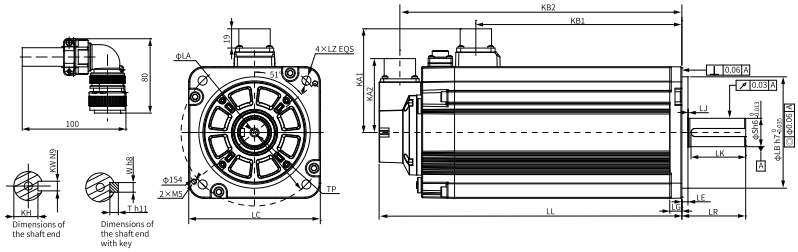Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	236 (261)	63 ± 1	145	4 × ϕ9	102.4	165.5	73	215.5 (240.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	13.2 (15.1)

5.1.2.3.13 MS1H2-50C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	5.0		
Voltage (V)	220		
Rated torque (N·m)	15.8		
Maximum torque (N·m)	39.5		
Rated frequency (Hz)	150		
Rated current (A)	22		Heatsink-based derating curve
Maximum current (A)	67.5		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.81		
Rotor moment of inertia (kg·cm^2)	Motor without brake	11.6 ± 10%	
	Motor with brake	14.58 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

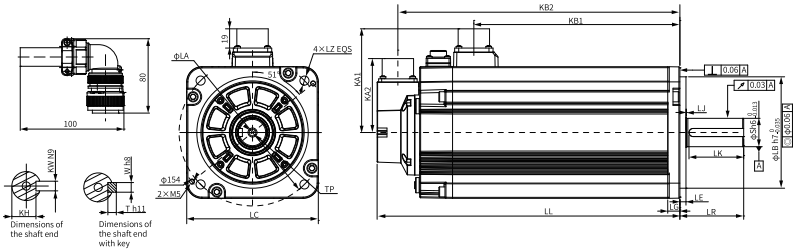Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	274 (299)	63 ± 1	145	4 × ϕ9	102.4	203.5	73	253.5 (278.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 $^{0}_{-0.62}$	240 $^{0}_{-0.2}$	8	8	7	16.35 (18.25)

5.1.2.3.14 MS1H2-50C30CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	5.0		
Voltage (V)	380		
Rated torque (N·m)	15.8		
Maximum torque (N·m)	47.4		
Rated frequency (Hz)	150		
Rated current (A)	17		Heatsink-based derating curve
Maximum current (A)	52.5		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.04		
Rotor moment of inertia (kg·cm^2)	Motor without brake	11.6 ± 10%	
	Motor with brake	14.58 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392


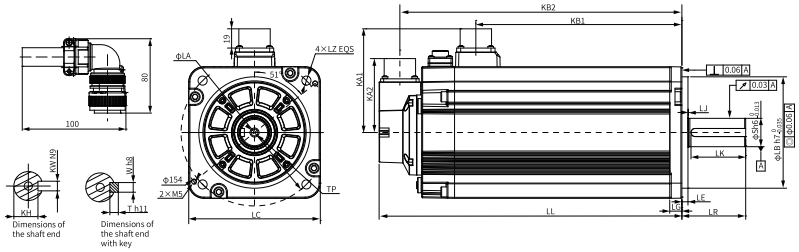
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	274 (299)	63 ± 1	145	4 × ϕ9	102.4	203.5	73	253.5 (278.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 -0.62	240 -0.2	8	8	7	16.35 (18.25)

5.1.2.4 Medium Inertia and Medium Capacity (MS1H3)

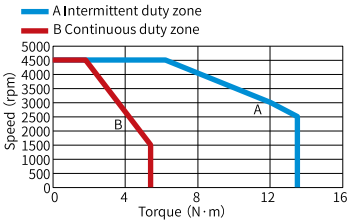5.1.2.4.1 MS1H3-85B15CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	0.85		
Voltage (V)	220		
Rated torque (N·m)	5.39		
Maximum torque (N·m)	13.5		
Rated frequency (Hz)	125 m		
Rated current (A)	6.6		Heatsink-based derating curve
Maximum current (A)	17.2		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	0.93		
Rotor moment of inertia (kg·cm²)	Motor without brake	13.56 ± 10%	
	Motor with brake	15.8 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196

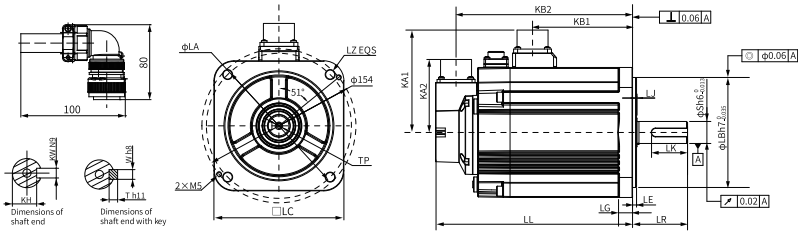Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	142 (167)	55 ± 1	145	4 × ϕ9	103	70	73	121.5 (146.5)	14	4
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		22	M6 × 20	350 -0.62	180 -0.2	8	8	7	5.8 (7.7)

5.1.2.4.2 MS1H3-85B15CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	0.85		
Voltage (V)	380		
Rated torque (N·m)	5.39		
Maximum torque (N·m)	13.5		
Rated frequency (Hz)	125 m		
Rated current (A)	3.5		Heatsink-based derating curve
Maximum current (A)	8.5		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.84		
Rotor moment of inertia (kg·cm²)	Motor without brake	13.56 ± 10%	
	Motor with brake	15.8 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196

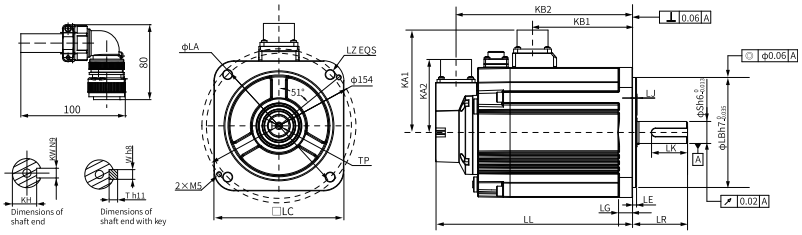Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	142 (167)	55 ± 1	145	4 × ϕ9	103	70	73	121.5 (146.5)	14	4
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		22	M6 × 20	350 -0.62	180 -0.2	8	8	7	5.8 (7.7)

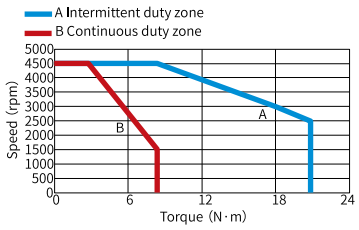5.1.2.4.3 MS1H3-13C15CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	1.3		
Voltage (V)	220		
Rated torque (N·m)	8.34		
Maximum torque (N·m)	20.85		
Rated frequency (Hz)	125 m		
Rated current (A)	10.5		Heatsink-based derating curve
Maximum current (A)	27.3		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	0.89		
Rotor moment of inertia (kg·cm²)	Motor without brake	19.25 ± 10%	
	Motor with brake	21.5 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196

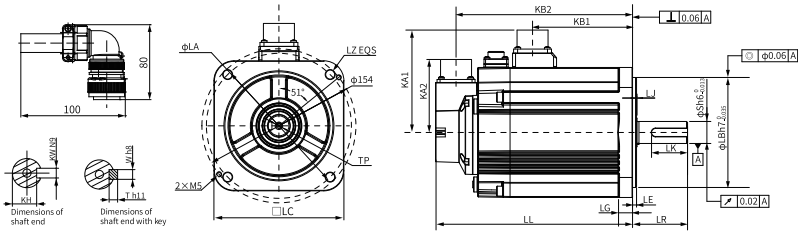Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	157 (182)	55 ± 1	145	4 × ϕ9	103	85	73	136.5 (161.5)	14	4
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		22	M6 × 20	350 -0.62	180 -0.2	8	8	7	7.1 (8.9)

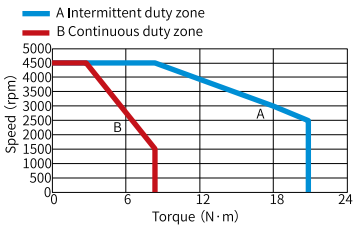5.1.2.4.4 MS1H3-13C15CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	1.3		
Voltage (V)	380		
Rated torque (N·m)	8.34		
Maximum torque (N·m)	20.85		
Rated frequency (Hz)	125 m		
Rated current (A)	5.1		Heatsink-based derating curve
Maximum current (A)	12.6		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.85		
Rotor moment of inertia (kg·cm²)	Motor without brake	19.25 ± 10%	
	Motor with brake	21.5 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196


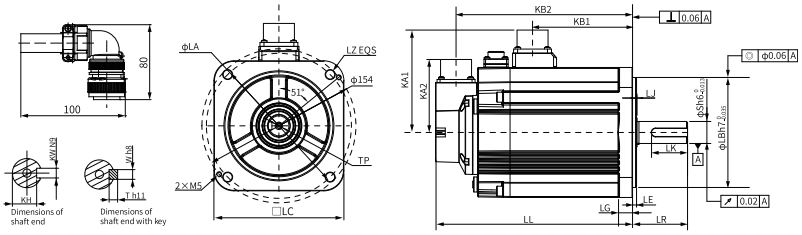
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	157 (182)	55 ± 1	145	4 × ϕ9	103	85	73	136.5 (161.5)	14	4

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	22	M6 × 20	350 -0.62	180 -0.2	8	8	7	7.1 (8.9)

5.1.2.4.5 MS1H3-18C15CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	1.8		
Voltage (V)	220		
Rated torque (N·m)	11.5		
Maximum torque (N·m)	28.75		
Rated frequency (Hz)	125 m		
Rated current (A)	11.9		Heatsink-based derating curve
Maximum current (A)	32.2		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.09		
Rotor moment of inertia (kg·cm²)	Motor without brake	24.9 ± 10%	
	Motor with brake	27.2 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196

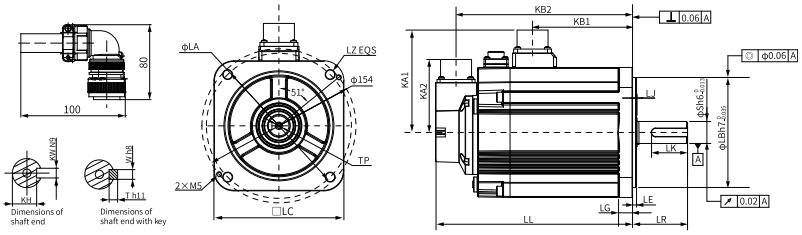Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	172 (197)	55 ± 1	145	4 × ϕ9	103	100	73	151.5 (176.5)	14	4
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		22	M6 × 20	350 -0.62	180 -0.2	8	8	7	8.5 (10.3)

5.1.2.4.6 MS1H3-18C15CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	1.8		
Voltage (V)	380		
Rated torque (N·m)	11.5		
Maximum torque (N·m)	28.75		
Rated frequency (Hz)	125 m		
Rated current (A)	6.75		Heatsink-based derating curve
Maximum current (A)	17.7		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.87		
Rotor moment of inertia (kg·cm²)	Motor without brake	24.9 ± 10%	
	Motor with brake	27.2 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196


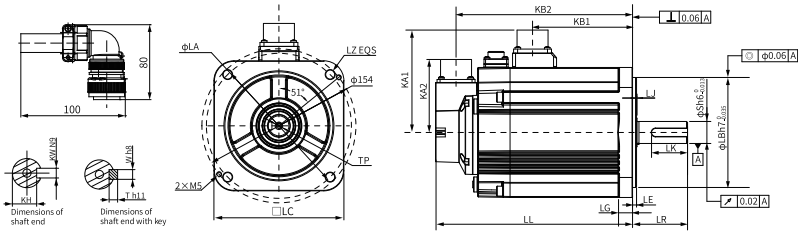
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	172 (197)	55 ± 1	145	4 × ϕ9	103	100	73	151.5 (176.5)	14	4

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	22	M6 × 20	350 -0.62	180 -0.2	8	8	7	8.5 (10.3)

5.1.2.4.7 MS1H3-29C15CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	2.9		
Voltage (V)	220		
Rated torque (N·m)	18.6		
Maximum torque (N·m)	46.5		
Rated frequency (Hz)	125 m		
Rated current (A)	18		Heatsink-based derating curve
Maximum current (A)	52.5		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.16		
Rotor moment of inertia (kg·cm²)	Motor without brake	44.7 ± 10%	
	Motor with brake	52.35 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load


LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490

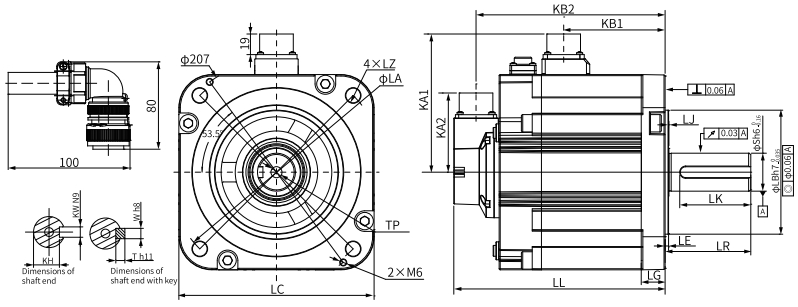
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	161 (194.8)	79 ± 1	200	4 × ϕ13.5	127.4	93.5	73	140.5 (174.3)	20.5	3.2 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3		35	M12 × 25	640 $^{-0.74}$	300 $^{-0.2}$	10	10	8	13.8 (17.9)

5.1.2.4.8 MS1H3-29C15CD-A33*R-INT

Motor specifications		Torque-speed characteristics
Frame size (mm)	180	
Inertia, capacity	Medium inertia, medium capacity	
Rated power (kW)	2.9	
Voltage (V)	380	
Rated torque (N·m)	18.6	
Maximum torque (N·m)	46.5	
Rated frequency (Hz)	125 m	
Rated current (A)	10.5	Heatsink-based derating curve

Motor specifications			Torque-speed characteristics
Maximum current (A)	29.75		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.94		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	44.7 ± 10%	
	Motor with brake	52.35 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490

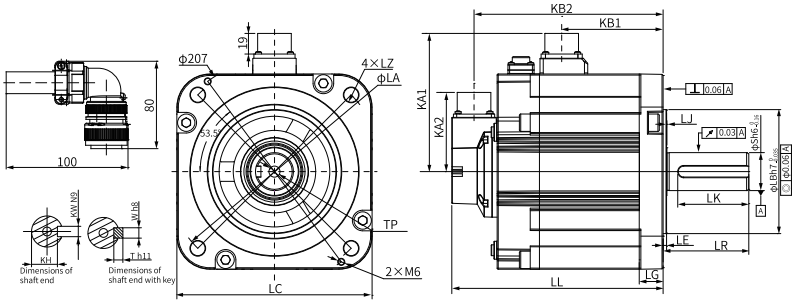Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	161 (194.8)	79 ± 1	200	4 × ϕ13.5	127.4	93.5	73	140.5 (174.3)	20.5	3.2 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3		35	M12 × 25	$640_{-0.74}$	$300_{-0.2}$	10	10	8	13.8 (17.9)

5.1.2.4.9 MS1H3-44C15CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	4.4		
Voltage (V)	220		
Rated torque (N·m)	28.4		
Maximum torque (N·m)	71.1		
Rated frequency (Hz)	125 m		
Rated current (A)	25.5		Heatsink-based derating curve
Maximum current (A)	67		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.25		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	64.9 ± 10%	
	Motor with brake	72.55 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490


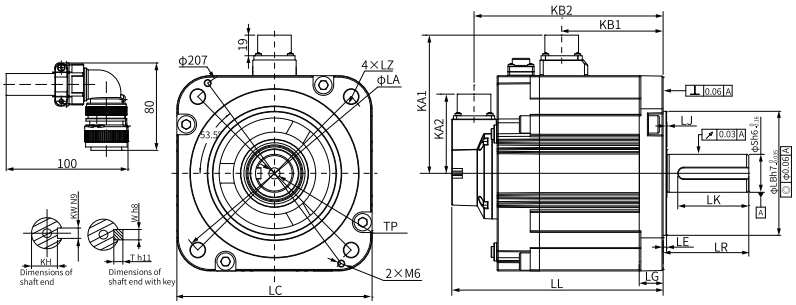
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	184.5 (218.3)	79 ± 1	200	4 × ϕ13.5	127.4	117	73	164 (197.8)	20.5	3.2 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3	35	M12 × 25	640 $^{-0.74}$	300 $^{-0.2}$	10	10	8	17.4 (21.9)

5.1.2.4.10 MS1H3-44C15CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	4.4		
Voltage (V)	380		
Rated torque (N·m)	28.4		
Maximum torque (N·m)	71.1		
Rated frequency (Hz)	125 m		
Rated current (A)	16		Heatsink-based derating curve
Maximum current (A)	42		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.96		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	64.9 ± 10%	
	Motor with brake	72.55 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490


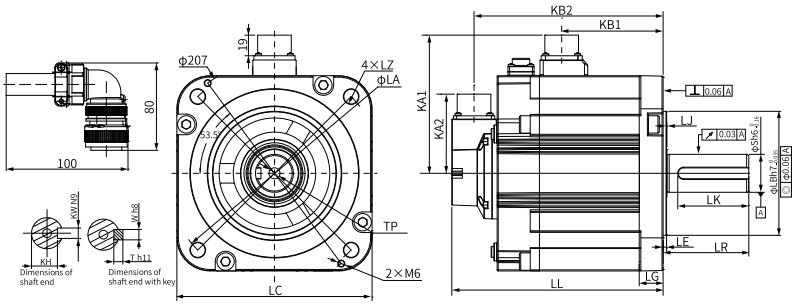
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	184.5 (218.3)	79 ± 1	200	4 × ϕ13.5	127.4	117	73	164 (197.8)	20.5	3.2 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3	35	M12 × 25	640 $^{-0.74}$	300 $^{-0.2}$	10	10	8	17.4 (21.6)

5.1.2.4.11 MS1H3-55C15CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	5.5		
Voltage (V)	380		
Rated torque (N·m)	35		
Maximum torque (N·m)	87.6		
Rated frequency (Hz)	125 m		
Rated current (A)	20.7		Heatsink-based derating curve
Maximum current (A)	52		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.92		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	86.9 ± 10%	
	Motor with brake	94.55 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
113	≤ 1764	≤ 588


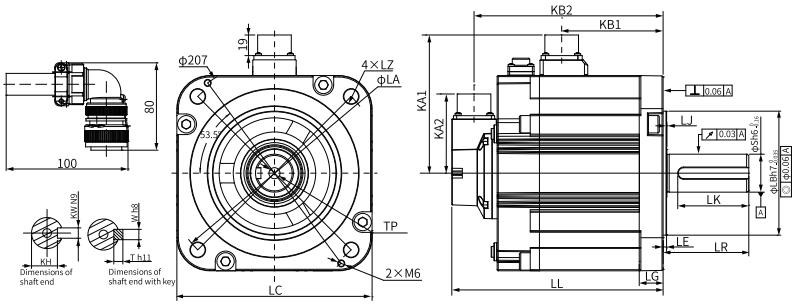
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	208 (241.8)	113 ± 1	200	4 × ϕ13.5	127.4	140.5	73	187.5 (221.3)	20.5	3.2 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3	42	M16 × 32	950 $^{-0.87}$	370 $^{-0.2}$	12	12	8	21.7 (25.9)

5.1.2.4.12 MS1H3-75C15CD-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	7.5		
Voltage (V)	380		
Rated torque (N·m)	48		
Maximum torque (N·m)	119		
Rated frequency (Hz)	125 m		
Rated current (A)	25		Heatsink-based derating curve
Maximum current (A)	65		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	2.13		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	127.5 ± 10%	
	Motor with brake	135.15 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
113	≤ 1764	≤ 588

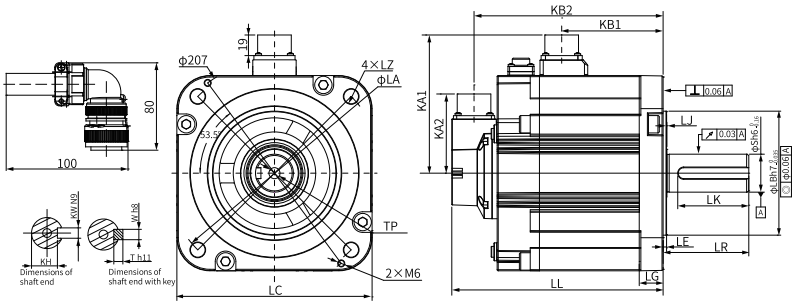Dimensions (mm)





LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	255 (288.8)	113 ± 1	200	4 × ϕ13.5	127.4	187.5	73	234.5 (268.5)	20.5	3.2 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3	42	M16 × 32	950 $^{-0.87}$	370 $^{-0.2}$	12	12	8	29 (33.2)

5.1.2.5 Medium Inertia and Small Capacity (MS1H4)

5.1.2.5.1 MS1H4-05B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia, capacity	Medium inertia, low capacity		
Rated output (kW)	0.05		
Voltage (V)	220		
Rated torque (N·m)	0.16		
Maximum torque (N·m)	0.56		
Rated frequency (Hz)	350		
Rated current (A)	1.27		Heatsink-based derating curve
Maximum current (A)	4.78		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.15		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.038 ± 10%	
	Motor with brake	0.04 ± 10%	

Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

Dimensions (mm)

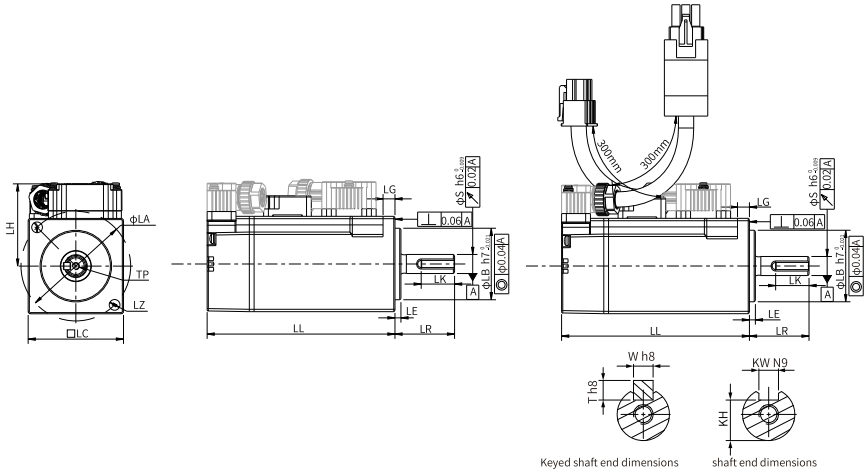


Figure 5-8 MS1H4-05B30CB-A330R and MS1H4-05B30CB-A332R

LL	LC	LR	LA	LZ	LH	LG	LE	
51 (78.3)	40	25 ± 0.5	46	2 × ϕ4.5	34.5	5	2.5 ± 0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 6	140 - $^{0.36}$	6.2^{0} $_{-0.1}$	3	3	3	0.24 (0.40)

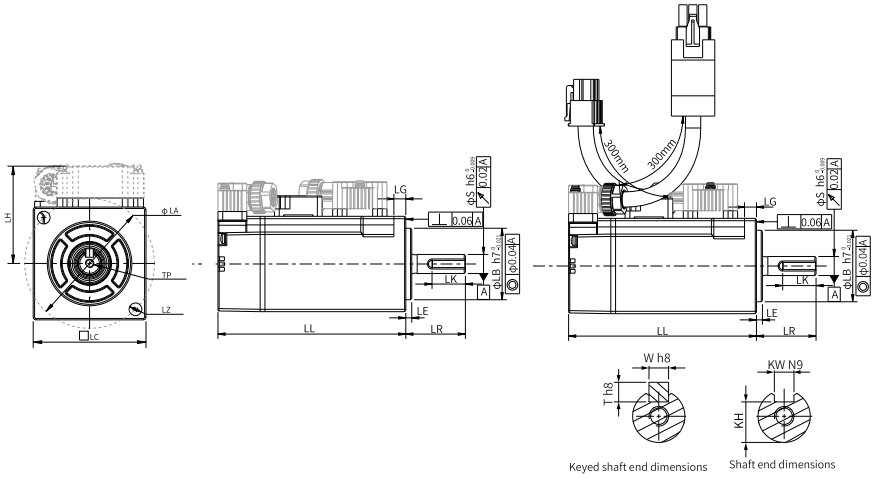




Figure 5-9 MS1H4-05B30CB-A331R and MS1H4-05B30CB-A334R

LL	LC	LR	LA	LZ	LH	LG	LE	
53.7 (81)	40	25 ± 0.5	46	2 × ϕ4.5	34.5	5	2.5 ± 0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 6	140 - $^{0.36}$	6.2^{0} $_{-0.1}$	3	3	3	0.26 (0.42)

5.1.2.5.2 MS1H4-10B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia, capacity	Medium inertia, low capacity		
Rated output (kW)	0.1		
Voltage (V)	220		
Rated torque (N·m)	0.32		
Maximum torque (N·m)	1.12		
Rated frequency (Hz)	350		
Rated current (A)	1.27		Heatsink-based derating curve
Maximum current (A)	4.78		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.29		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.072 ± 10%	
	Motor with brake	0.074 ± 10%	

Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

Dimensions (mm)

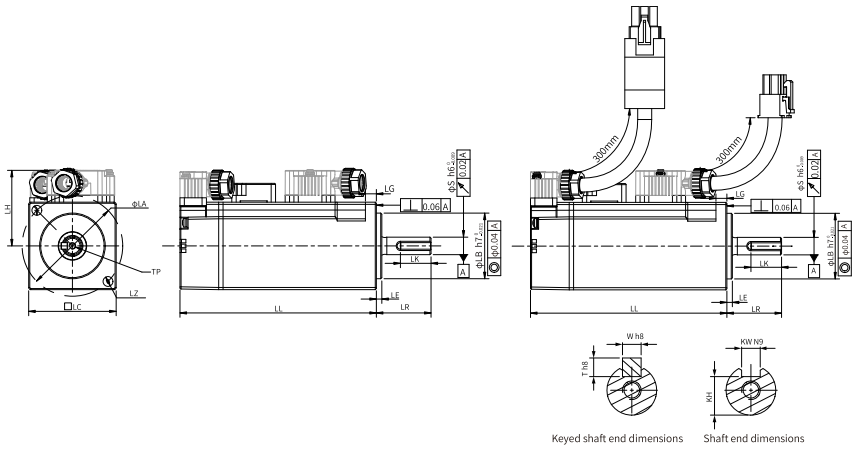


Figure 5-10 MS1H4-10B30CB-A330R and MS1H4-10B30CB-A332R

LL	LC	LR	LA	LZ	LH	LG	LE	
62 (89.3)	40	25 ± 0.5	46	2 × ϕ4.5	34.5	5	2.5 ± 0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 6	140 -0.36	$6.2^{0}_{-0.1}$	3	3	3	0.32 (0.48)

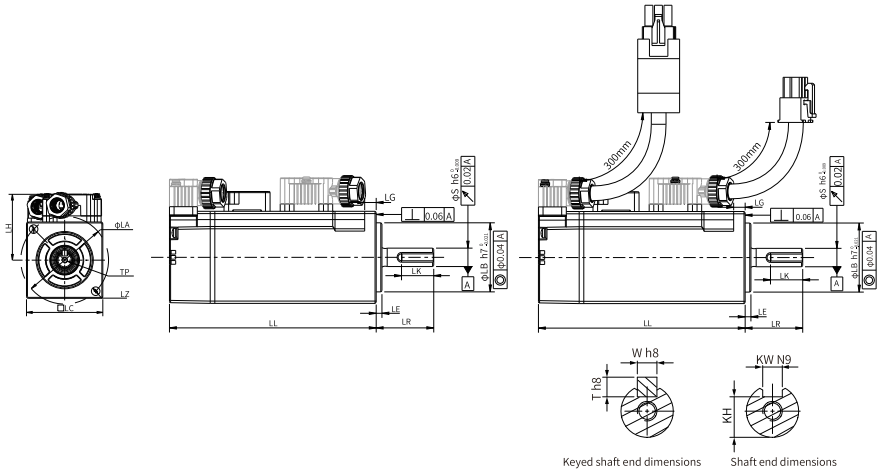



Figure 5-11 MS1H4-10B30CB-A331R and MS1H4-10B30CB-A334R

LL	LC	LR	LA	LZ	LH	LG	LE	
64.7 (92)	40	25 ± 0.5	46	2 × ϕ4.5	34.5	5	2.5 ± 0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 6	140 -0.36	$6.2^{0}_{-0.1}$	3	3	3	0.34 (0.50)

5.1.2.5.3 MS1H4-20B30CB-A33*R-INT

Motor specifications		Torque-speed characteristics
Frame size (mm)	60	A Intermittent duty zone B Continuous duty zone Speed (rpm) 8000 7000 6000 5000 4000 3000 2000 1000 0 0 0.6 1.2 1.8 2.4 Torque (N·m) B A
Inertia, capacity	Medium inertia, low capacity	
Rated power (kW)	0.2	
Voltage (V)	220	
Rated torque (N·m)	0.64	
Maximum torque (N·m)	2.24	
Rated frequency (Hz)	250	
Rated current (A)	1.3	Heatsink-based derating curve

Motor specifications			Torque-speed characteristics
Maximum current (A)	5.3		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.55		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.22 ± 10%	
	Motor with brake	0.23 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1.5

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

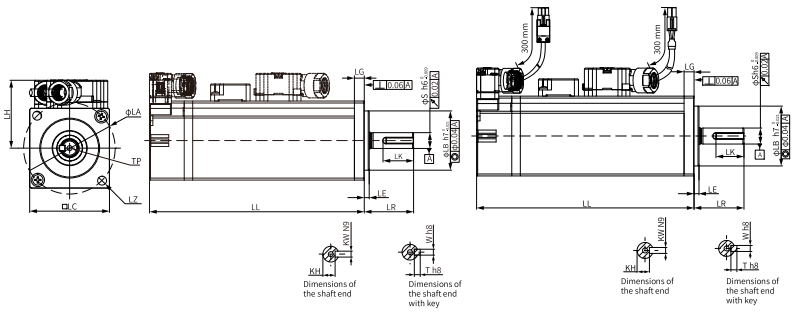Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	73.5 (101.1)	30 ± 0.5	70	4 × ϕ5.5	44	8.0	3 ± 0.5	
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
50	14	M5 × 8	16.50 $^{-0}_{-0.53}$	110 $^{-0.1}$	5	5	5	0.78 (1.16)

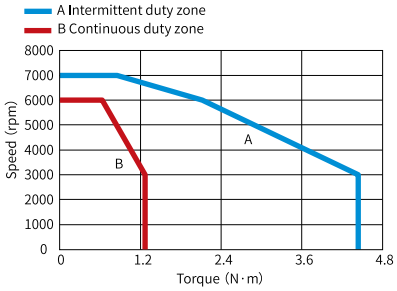5.1.2.5.4 MS1H4-40B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	60		
Inertia and capacity	Medium inertia, small capacity		
Rated power (kW)	0.4		
Voltage (V)	220		
Rated torque (N·m)	1.27		
Maximum torque (N·m)	4.45		
Rated frequency (Hz)	250		
Rated current (A)	2.4		Heatsink-based derating curve
Maximum current (A)	9.2		
Rated speed (rpm)	3000		
Maximum Speed (rpm)	7000		
Torque coefficient (N·m/A)	0.58		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.43±10%	
	Motor with brake	0.44±10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1.5

Allowable loads



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

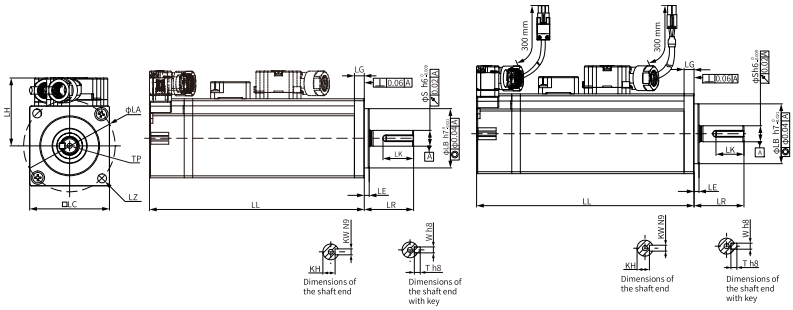Product dimensions (in mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	92 (119.8)	30±0.5	70	4 × ϕ5.5	44	8.0	3±0.5	
LB	S	TP	LK	KH	KW	W	T	Weight (kg)
50	14	M5 × 8	$16.5^{0}_{-0.53}$	$11^{0}_{-0.1}$	5	5	5	1.11 (1.48)

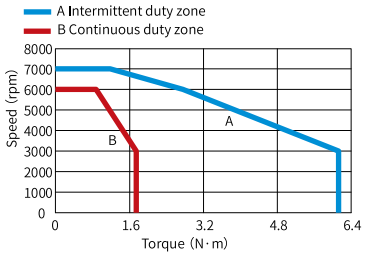
5.1.2.5.5 MS1H4-55B30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Medium inertia, low capacity		
Rated power (kW)	0.55		
Voltage (V)	220		
Rated torque (N·m)	1.75		
Maximum torque (N·m)	6.13		
Rated frequency (Hz)	250		
Rated current (A)	3.3		Heatsink-based derating curve
Maximum current (A)	13.2		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.58		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	1.12 ± 10%	
	Motor with brake	-	

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

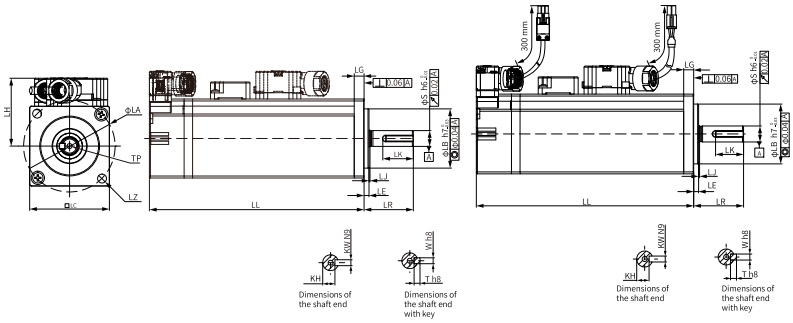Dimensions (mm)




LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	96.7	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	$250_{-}^{0.62}$	$15.50_{-0.1}$	6	6	6	1.85


5.1.2.5.6 MS1H4-75B30CB-A33*R-INT

Motor specifications		
Frame size (mm)	80	
Inertia, capacity	Medium inertia, small capacity	
Rated power (kW)	0.75	
Voltage (V)	220	
Rated torque (N·m)	2.39	
Maximum torque (N·m)	8.37	
Rated frequency (Hz)	250	
Rated current (A)	4.4	
Maximum current (A)	16.9	
Rated speed (rpm)	3000	
Maximum speed (rpm)	7000	
Torque coefficient (N·m/A)	0.63	
Rotor moment of inertia ($kg \cdot cm^2$)	Brake-less motor	1.46±10%
	Brake motor	1.51±10%

Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

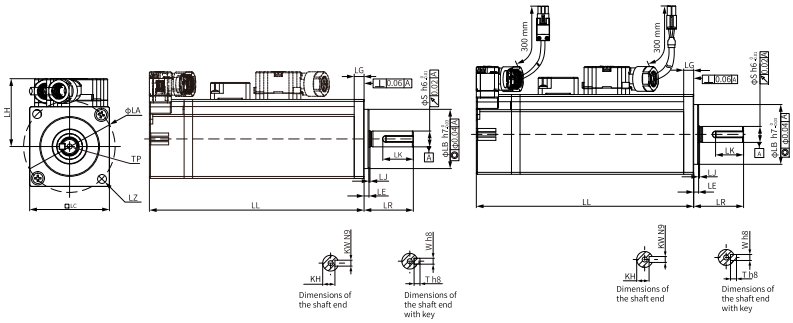Product dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	107.3 (140.5)	35± 0.5	90	4 x ϕ7	54	7.5	3±0.5	0.5±0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6x20	$25^{0}_{-0.62}$	$15.5^{0}_{-0.1}$	6	6	6	2.18 (2.82)

5.1.2.5.7 MS1H4-10C30CB-A33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Medium inertia, low capacity		
Rated power (kW)	1.0		
Voltage (V)	220		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	11.13		
Rated frequency (Hz)	250		
Rated current (A)	6.5		Heatsink-based derating curve
Maximum current (A)	24		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.53		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	1.87 ± 10%	
	Motor with brake	1.97 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

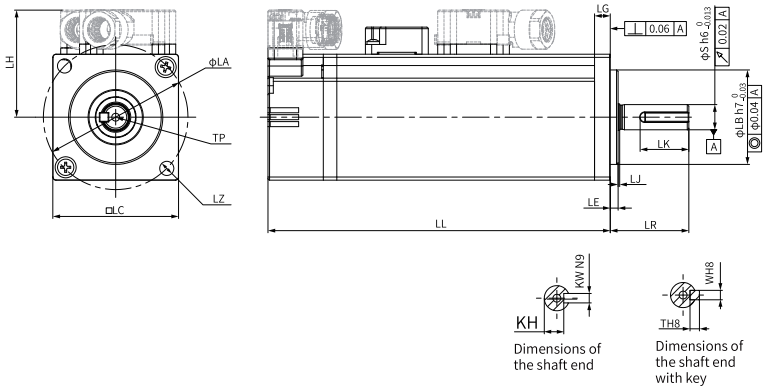Dimensions (mm)




LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	118.7 (153.2)	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 $^{-0.62}$	15.50 $^{-0.1}$	6	6	6	2.55 (2.9)

5.2 MS1-R Series Servo Motor with Battery-free Encoder

5.2.1 General Specifications

5.2.1.1 Mechanical Characteristics

Item	Description
Duty type	S1 (Continuous duty)
Vibration grade[1]	V15
Insulation resistance	500 VDC, above 10 MΩ
Excitation mode	Permanent magnet
Installation method	Flange
Thermal class	F
Insulation voltage	1500 VAC, 1 min (200 V class) 1800 VAC, 1 min (400 V class)
IP rating	IP67 (except the shaft opening)
Direction of rotation	Rotates counterclockwise (CCW) when viewed from the shaft extension side with a forward run command.  CCW

Item		Description
Ambient condition	Ambient temperature	0°C to 40°C (non-freezing)
	Ambient humidity	20% RH to 80% RH (without condensation)
	Rated operating altitude	1000 m
	Altitude-based derating	• 1000 m and below: Derating is not needed. • For use above 1000 m, derate according to *"5.2.1.3 Derating Characteristics" on page 99*. For altitudes above 2000 m, install an isolation transformer at the power input end.
	Installation location	• Free from corrosive or explosive gases • Well ventilated with minimum amount of dust, waste, and moisture • Convenient for inspection and cleaning • Away from sources that may generate strong magnetic field • Away from heating sources such as heating stoves. • Use a motor with oil seal in places with grinding fluid, oil mist, iron powders or cuttings. • Oil seal protection capability: The oil seal is only dust-proof. It cannot withstand the intrusion of oil for a long term. For direct-connected reducer applications requiring long-term oil resistance on the motor oil seal, contact Inovance technical support. • Not applicable to vacuum environments. • Not applicable to inching conditions (not full-turn) [2], which may stuck the motor • The motor with brake may generate a pattering sound. • In upstream applications of the motor, ensure the force applied on the shaft end is lower than the allowable axial force and radial force of the motor. • The system should avoid continuous operation at a natural frequency. Exceeding the allowable vibration value may damage the system.
	Storage environment	Observe the following requirements for storing a de-energized motor. • Temperature: -20°C to +60°C (non-freezing) • Storage humidity: 20% to 80% RH (without condensation)
Shock resistance [3][5]	Shock acceleration (flange side as standard)	490 m/s^2
	Number of shocks	2
Vibration resistance [4][5]	Vibration acceleration (flange side as standard)	Radial 49 m/s^2 Axial 24.5 m/s^2

Note

- [1] Vibration class V15 indicates that the amplitude of vibration is lower than 15 μm when an individual motor rotates at rated values.
- [2] For applications that require the motor shaft to swing back and forth at a certain angle, contact Inovance.
- [3] The resistance for shock in the vertical direction when the motor is mounted with the shaft in a horizontal position is shown in the preceding table.
- [4] The vertical, side-to-side, and front-to-back resistance for vibration in three directions when the servo motor is mounted with the shaft in a horizontal position is shown in the preceding table.
- [5] The vibration intensity applied on the motor is affected by the transmission structure, alignment accuracy, mounting conditions, and external vibration. These factors may enhance the vibration applied on the motor. When the maximum allowable vibration limit is exceeded, the motor may fail. Therefore, take necessary measures to limit resonance.
- The vibration intensity applied on the motor varies with applications.




Figure 5-12 Shock applied to the servo motor

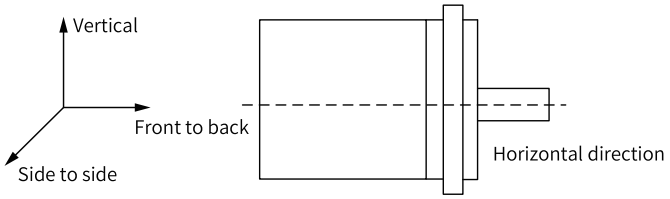


Figure 5-13 Vibration applied to the servo motor

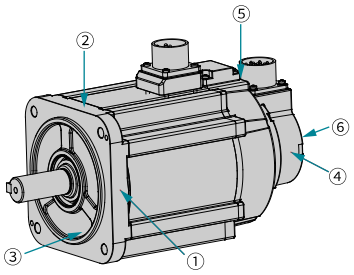


Figure 5-14 Max. allowable vibration limit of the motor

Direction	Measuring point	Limit value (10 Hz to 2000 Hz)
Radial	①②	49 m/s^2
	④⑤	49 m/s^2
Axial	③	24.5 m/s^2
	⑥	24.5 m/s^2

Note

The preceding vibration/shock standards cannot be applied for a long term. For long-term application, contact Inovance.

5.2.1.2 Overload Characteristics

The drive is compliant with NEC and CEC requirements and equipped with protective functions against overload and overtemperature.

The following overload protection curve applies to hot start at an ambient temperature of 40℃, which cannot guarantee continuous duty in cases of 100% output or above. During use, keep the effective torque of the load within the continuous duty zone.

To protect different load motors, set the motor overload protection gain based on the overload capacity of the motor. Use the default gain in general conditions. However, when one of the following conditions occurs, change the gain based on actual motor temperature:

- The motor operates in environments with high temperature.
- The motor is in cyclic motion featuring a short motion cycle and frequent acceleration/ deceleration.
- Overload thermal protection only occurs during continuous energized operation. You need to check the motor temperature when the drive is powered off.

The motor overload protection curve is as follows:

- **MS1H1/H4 (frame size 40/60/80)**

Load ratio (%)	Operating time (s)
120	230
130	80
140	40
150	30
160	20
170	17
180	15
190	12
200	10
210	8.5
220	7
230	6
240	5.5
250	5
300	3
350	2

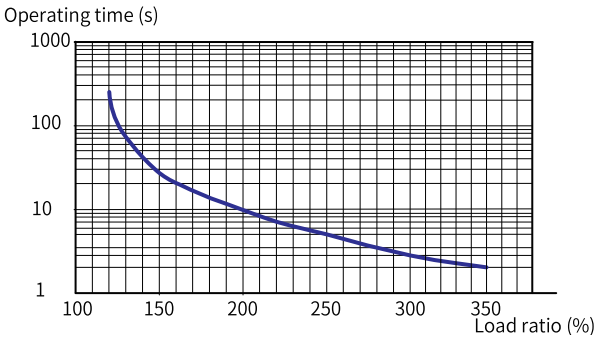


Figure 5-15 MS1H1/H4 (frame size 40/60/80) series motor overload curve

Note

The maximum torque of H1 and H4 models is the rated torque x 3.5.

- **MS1H2/MS1H3**

Load ratio (%)	Operating time (s)
115	6000
120	2533
125	1226
130	915
135	769
140	527
145	352
150	221
155	128
160	99
165	83
170	67
175	55
180	49
185	45
190	41
195	38
200	34
205	31
210	28
215	24
220	22
225	21
230	19
235	18
240	16
245	14
250	13
255	12
260	11
265	10
270	9
275	9
280	8
285	7
290	6
295	5
300	5

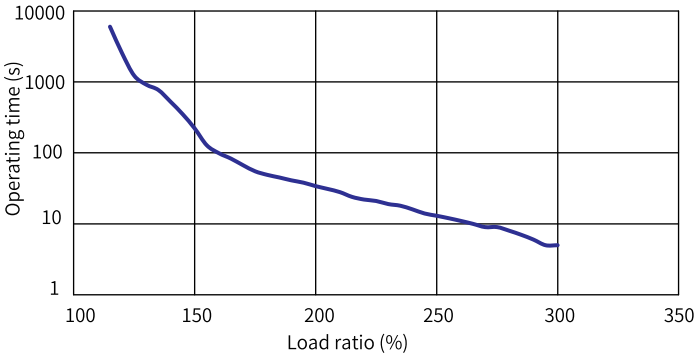


Figure 5-16 Overload curve of MS1H2 and MS1H3 series motors

Note

- The maximum torque of H2 models is the rated torque x 3.
- The maximum torque of H3 models is the rated torque x 2.5.

5.2.1.3 Derating Characteristics


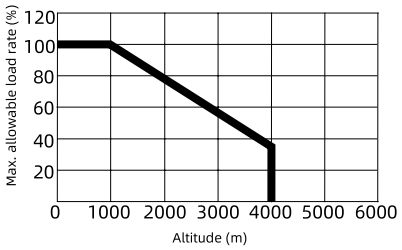


Figure 5-17 Altitude-based derating curve

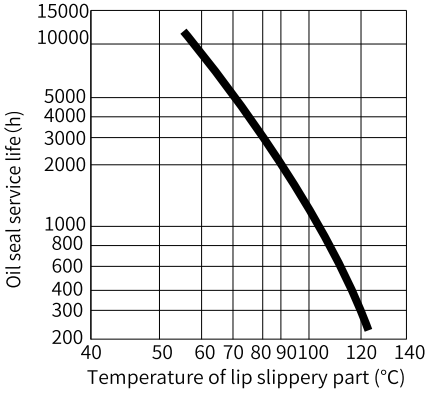5.2.1.4 Temperature Curve of the Oil Seal



5.2.1.5 Load Moment of Inertia

The load moment of inertia represents the ratio of the load inertia to the rotor inertia. The higher the load inertia ratio, the weaker the responsiveness will be. An excessively high inertia ratio can result in unstable operation. The allowable load inertia ratio of the servo motor is limited. The value is a general standard and varies according to the driving conditions of the servo motor.

An overvoltage alarm may occur during deceleration if the load moment of inertia exceeds the allowable value. For servo drives with a built-in braking resistor, an overload alarm my be reported. In cases of such alarms, take one of the following measures:

- Reduce the torque limit values.
- Reduce the deceleration rate.
- Reduce the maximum speed.
- Install an external braking resistor if the alarm cannot be cleared by using the above measures.


Caution

- For the built-in braking resistor of the drive, see Components.
- Even you use a built-in resistor, the energy generated in some regenerative conditions may exceed the allowable capacity loss (W) of the resistor. In this case, an external braking resistor is required.


5.2.2 Model Specifications

5.2.2.1 Selection Instructions

- Description of torque-speed characteristics curves:
  - All parameters and torque-speed characteristic values are subject to the conditions that the motor works with an Inovance servo drive and the armature coil temperature is 20°C.
  - Continuous duty zone: refers to a series of states in which the motor can operate safely and continuously, and the actual torque must be located in this area.
  - Intermittent duty zone: refers to a series of states in which the motor can run within a short period of time when the actual torque is greater than the rated torque.
- The characteristic values are obtained in cases where the motor is installed with the following heatsink (unit: mm):
  - MS1H1/MS1H4: 250 x 250 x 6 (aluminum)
  - MS1H2-10C to 25C: 400 x 400 x 20 (steel)
  - MS1H2-30C to 50C: 400 x 400 x 20 (steel)
  - MS1H3-85B to 18C: 400 x 400 x 20 (steel)
  - MS1H3-29C to 55C: 550 x 550 x 30 (aluminum)
  - MS1H3-75C: 700 x 700 x 30 (aluminum)
- Radial and axial loads of the motor:



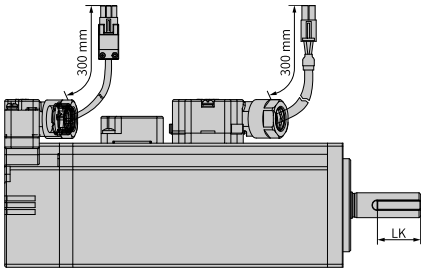- Dimensions of flying leads type motors
  Flying leads type motors with frame sizes 60/80 (model ended with "-S") provide a drain wire of about 300 mm in length, as shown in the following figure.





- As shown in the preceding figure, the product is marked with an LK value in the dimension diagram. LK indicates the length of the shaft key.
- MS1H3 (130-flange and 180-flange) comes with a key slot. When the operating speed is above 3000 rpm, the motor must run with the keyway. If you need to run the motor without the keyway at speeds higher than 3000 rpm, contact Inovance.

Note

- Values inside the parentheses in the following sections are parameters of the servo motor with a brake.
- The motor with oil seal must be derated by 10% during use.
- Use your own DC power supply as 24 V power supply of the brake. For the cable connecting the DC power supply to the motor brake, it is recommended to use cables with a cross-sectional area of 0.2 mm^2 or above for motors with rated 750 W or below. It is recommended to use cables with a cross-sectional area of 0.8 mm^2 or above for motors rated 750 W or above. The brake cannot share the same power supply with other appliances to prevent the voltage or current from falling due to the simultaneous operation of other electrical appliances, which may result in brake malfunction.
- Do not share a power supply among multiple brakes. Otherwise, a short-circuited coil caused by dry friction will lock other brakes that are connected to the power supply in parallel, resulting in dry friction on these brakes.
- The brake apply time and release time vary with the discharge circuit. Check the actual action delay of the product during use. The holding brake cannot be used for braking purpose.

5.2.2.2 Low Inertia and Small Capacity (MS1H1)

5.2.2.2.1 MS1H1-05B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia and capacity	Low inertia, small capacity		
Rated power (kW)	0.05		
Rated voltage (V)	220		
Rated torque (N·m)	0.16		
Maximum torque (N·m)	0.56		
Rated frequency (Hz)	250		
Rated current (A)	1.2		Heatsink-based derating curve
Maximum current (A)	4.8		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.15		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	0.018±10%	
	Motor with brake	0.0208±10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable loads



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

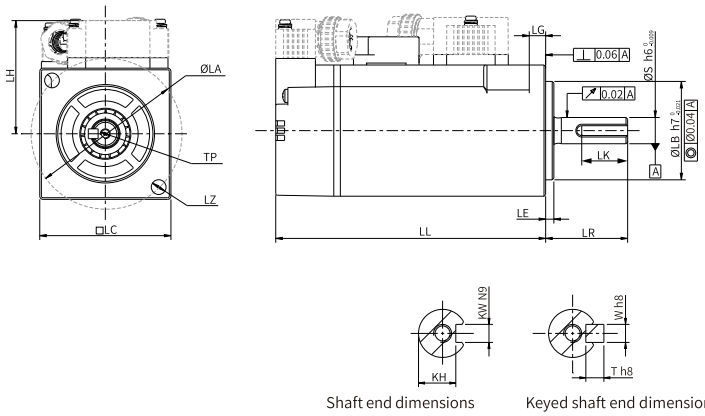Product dimensions (in mm)



LL	LC	LR	LA	LZ	LH	LG	LE	
57 (84.3)	40	25±0.5	46	2 × ϕ4.5	34.5	5	2.5±0.5	
S	LB	TP	LK	KH	KW	W	T	Weight (kg)
8	30	M3 × 7	$14^{0}_{-0.36}$	$6.2^{0}_{-0.1}$	3	3	3	0.26 (0.43)

5.2.2.2.2 MS1H1-10B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia and capacity	Low inertia, small capacity		
Rated power (kW)	0.1		
Rated voltage (V)	220		
Rated torque (N·m)	0.32		
Maximum torque (N·m)	1.12		
Rated frequency (Hz)	250		
Rated current (A)	1.2		Heatsink-based derating curve
Maximum current (A)	4.8		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.30		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	0.0316±10%	
	Motor with brake	0.0345±10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable loads

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

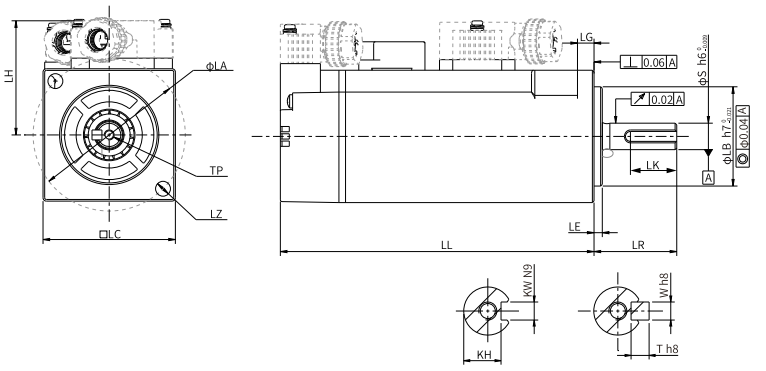
Product dimensions (in mm)




Shaft end dimensions Keyed shaft end dimensions

LL	LC	LR	LA	LZ	LH	LG	LE	
69.5 (96.8)	40	25±0.5	46	2 × ϕ4.5	34.5	5	2.5±0.5	
S	LB	TP	LK	KH	KW	W	T	Weight (kg)
8	30	M3 × 7	$14^{0}_{-0.36}$	$6.2^{0}_{-0.1}$	3	3	3	0.35 (0.52)

5.2.2.2.3 MS1H1-20B30CB-V33*R-INT

Motor specifications		Torque-speed characteristics
Frame size (mm)	60	
Inertia, capacity	Low inertia, small capacity	
Rated power (kW)	0.2	
Voltage (V)	220	
Rated torque (N·m)	0.64	
Maximum torque (N·m)	2.24	
Rated frequency (Hz)	250	
Rated current (A)	1.5	Heatsink-based derating curve

Motor specifications			Torque-speed characteristics
Maximum current (A)	5.3		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.51		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.094 ± 10%	
	Motor with brake	0.106 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

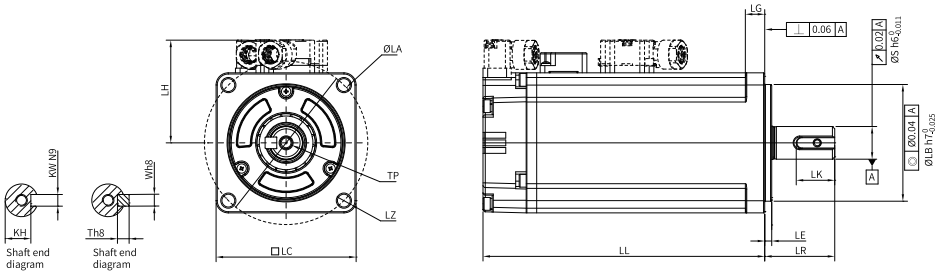Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	75.5 (103)	30 ± 0.5	70	4 × ϕ5.5	44	8.0	3 ± 0.5	
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
50	14	M5 × 12	160 -0.53	110 -0.1	5	5	5	0.80 (1.17)

5.2.2.2.4 MS1H1-40B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	60		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.4		
Voltage (V)	220		
Rated torque (N·m)	1.27		
Maximum torque (N·m)	4.45		
Rated frequency (Hz)	250		
Rated current (A)	2.5		Heatsink-based derating curve
Maximum current (A)	9.8		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.57		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.145 ± 10%	
	Motor with brake	0.157 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

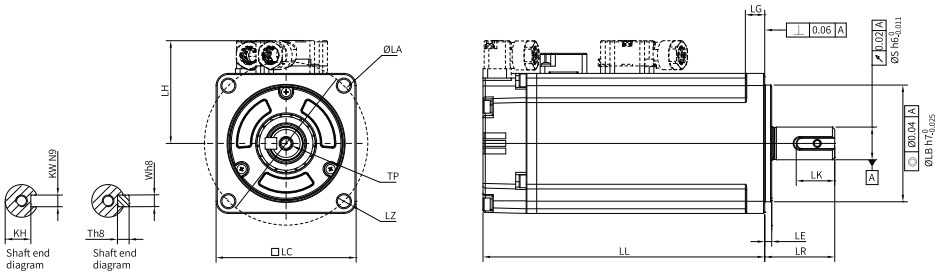Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	93 (121)	30 ± 0.5	70	4 × ϕ5.5	44	8.0	3 ± 0.5	
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
50	14	M5 × 12	160 - 0.53	110 - 0.1	5	5	5	1.11 (1.48)


5.2.2.2.5 MS1H1-55B30CB-V331R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	0.55		
Voltage (V)	220		
Rated torque (N·m)	1.75		
Maximum torque (N·m)	6.13		
Rated frequency (Hz)	250		
Rated current (A)	3.9		Heatsink-based derating curve
Maximum current (A)	15		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.51		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.55 ± 10%	
	Motor with brake	-	

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

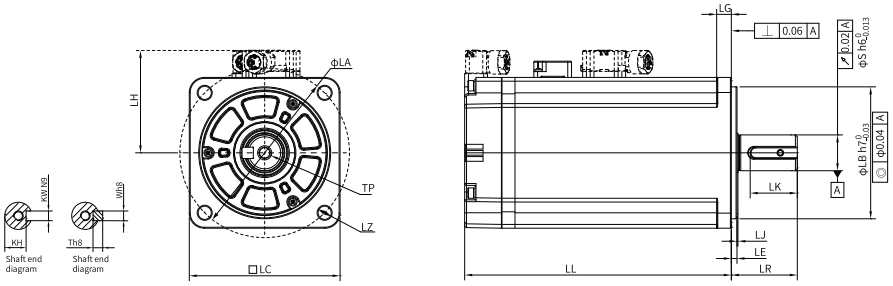Dimensions (mm)




LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	96.7	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 -0.62	15.50 -0.1	6	6	6	1.88


5.2.2.2.6 MS1H1-75B30CB-V33*R-INT

Motor specifications		
Frame size (mm)	80	
Inertia, capacity	Low inertia, small capacity	
Rated power (kW)	0.75	
Voltage (V)	220	
Rated torque (N·m)	2.39	
Maximum torque (N·m)	8.36	
Rated frequency (Hz)	250	
Rated current (A)	4.4	
Maximum current (A)	16.9	
Rated speed (rpm)	3000	
Maximum speed (rpm)	7000	
Torque coefficient (N·m/A)	0.62	
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.68 ± 10%
	Motor with brake	0.71 ± 10%

Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

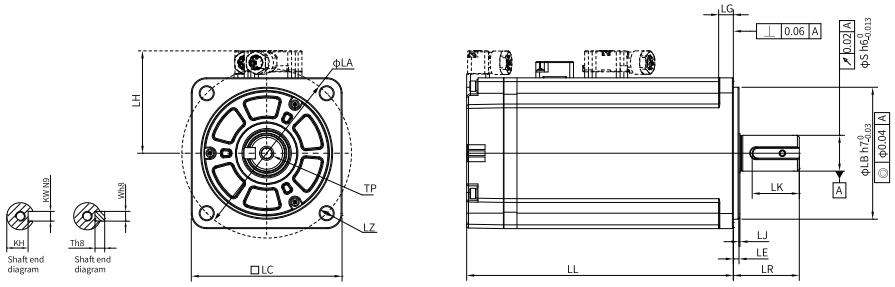Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	107.3 (141.5)	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 - 0.62	15.50 -0.1	6	6	6	2.22 (2.88)

5.2.2.2.7 MS1H1-10C30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Low inertia, small capacity		
Rated power (kW)	1.0		
Voltage (V)	220		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	11.13		
Rated frequency (Hz)	250		
Rated current (A)	6.2		Heatsink-based derating curve
Maximum current (A)	24		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.59		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.82 ± 10%	
	Motor with brake	0.87 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147


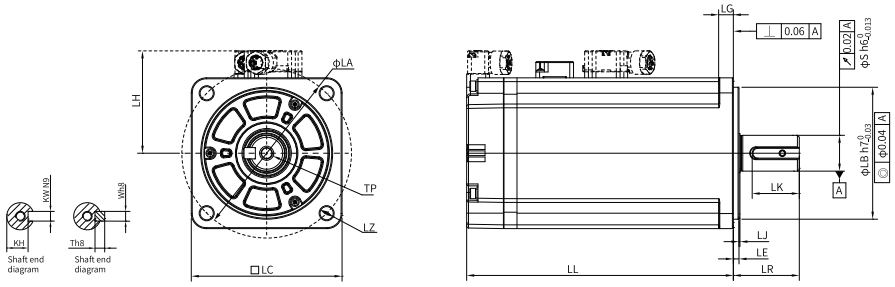
Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	119.2 (153.4)	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 - 0.62	15.50 -0.1	6	6	6	2.61 (3.27)

5.2.2.3 Low Inertia and Medium Capacity (MS1H2)

5.2.2.3.1 MS1H2-10C30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia and capacity	low inertia, medium capacity		
Rated power (kW)	1.0		
Voltage (V)	220		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	9.54		
Rated frequency (Hz)	250		
Rated current (A)	6.4		Heatsink-based derating curve
Maximum current (A)	23		
Rated speed (rpm)	3000		
Maximum Speed (rpm)	6000		
Torque coefficient (N·m/A)	0.54		
Rotor moment of inertia (kg·cm^2)	Motor without brake	1.78±10%	
	Motor with brake	2.6±10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable loads



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

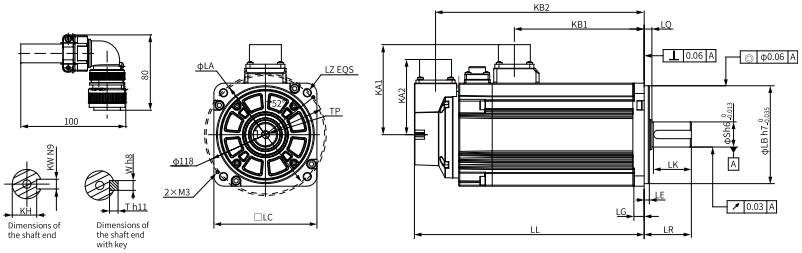Product dimensions (in mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	144 (172)	45±1	115	4 × ϕ7	88	75	73	123.5 (151.5)	10	5±0.3
LQ	LB		S	TP	LK	KH	KW	W	T	Weight (kg)
7.5±0.75	95		24	M8 × 16	$35^{0}_{-0.62}$	$20^{0}_{-0.2}$	8	8	7	3.85 (4.9)

5.2.2.3.2 MS1H2-10C30CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	1.0		
Voltage (V)	380		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	9.54		
Rated frequency (Hz)	250		
Rated current (A)	3.3		Heatsink-based derating curve
Maximum current (A)	11		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.07		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	1.78 ± 10%	
	Motor with brake	2.6 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

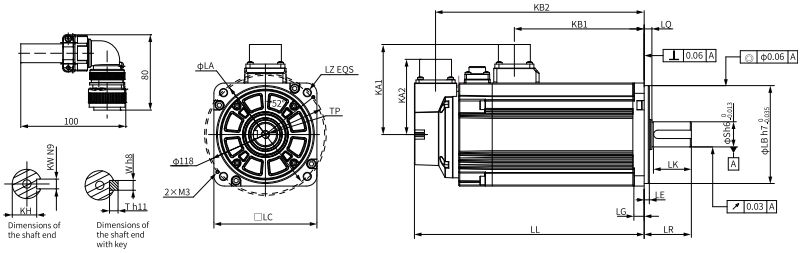Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	144 (172)	45 ± 1	115	4 × ϕ7	88	75	73	123.5 (151.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 $^{-0.62}$	200 $^{-0.2}$	8	8	7	3.85 (4.9)

5.2.2.3.3 MS1H2-15C30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	1.5		
Voltage (V)	220		
Rated torque (N·m)	4.9		
Maximum torque (N·m)	14.7		
Rated frequency (Hz)	250		
Rated current (A)	8.6		Heatsink-based derating curve
Maximum current (A)	32		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.62		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	2.35 ± 10%	
	Motor with brake	3.17 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

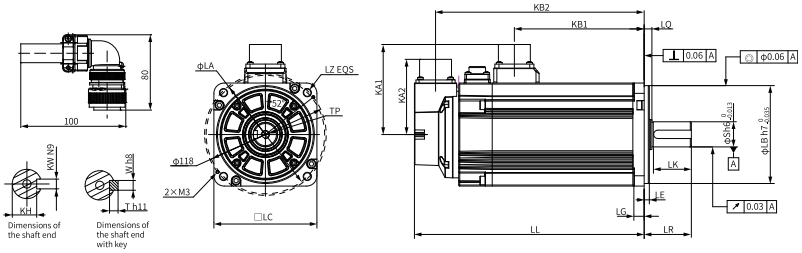Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	161 (189)	45 ± 1	115	4 × ϕ7	88	92	73	140.5 (168.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	4.65 (5.75)

5.2.2.3.4 MS1H2-15C30CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	1.5		
Voltage (V)	380		
Rated torque (N·m)	4.9		
Maximum torque (N·m)	14.7		
Rated frequency (Hz)	250		
Rated current (A)	4.2		Heatsink-based derating curve
Maximum current (A)	14		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.28		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	2.35 ± 10%	
	Motor with brake	3.17 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

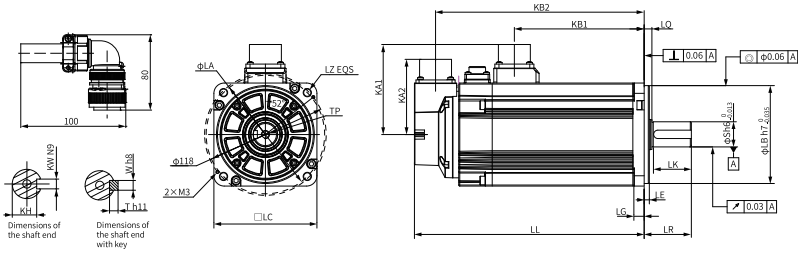Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	161 (189)	45 ± 1	115	4 × ϕ7	88	92	73	140.5 (168.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	4.65 (5.75)

5.2.2.3.5 MS1H2-20C30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.0		
Voltage (V)	220		
Rated torque (N·m)	6.36		
Maximum torque (N·m)	19.1		
Rated frequency (Hz)	250		
Rated current (A)	11.3		Heatsink-based derating curve
Maximum current (A)	42		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.60		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	2.92 ± 10%	
	Motor with brake	3.74 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

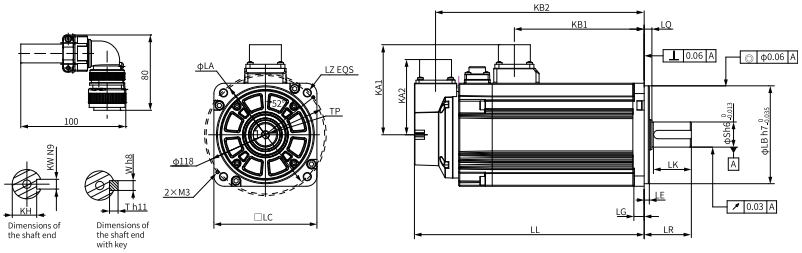Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	177 (205)	45 ± 1	115	4 × ϕ7	88	108	73	156.5 (184.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	5.5 (6.55)

5.2.2.3.6 MS1H2-20C30CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.0		
Voltage (V)	380		
Rated torque (N·m)	6.36		
Maximum torque (N·m)	19.1		
Rated frequency (Hz)	250		
Rated current (A)	5.6		Heatsink-based derating curve
Maximum current (A)	20		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.19		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	2.92 ± 10%	
	Motor with brake	3.74 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

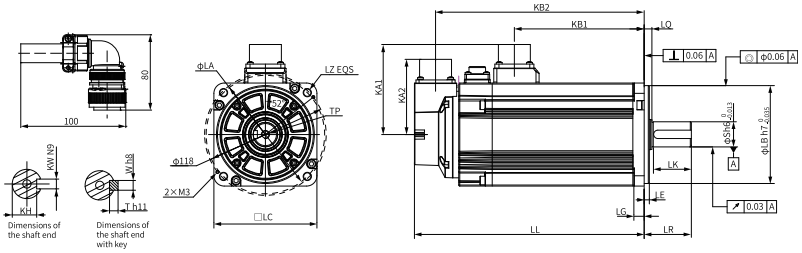Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	177 (205)	45 ± 1	115	4 × ϕ7	88	108	73	156.5 (184.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	5.5 (6.55)

5.2.2.3.7 MS1H2-25C30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.5		
Voltage (V)	220		
Rated torque (N·m)	7.96		
Maximum torque (N·m)	23.9		
Rated frequency (Hz)	250		
Rated current (A)	14.7		Heatsink-based derating curve
Maximum current (A)	53		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.60		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	3.49 ± 10%	
	Motor with brake	4.3 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

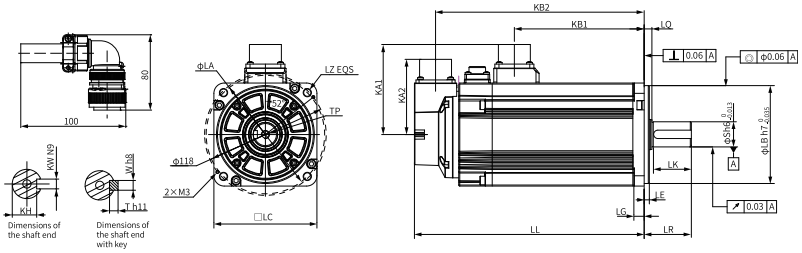Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	195 (223)	45 ± 1	115	4 × ϕ7	88	126	73	174.5 (202.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	6.3 (7.35)

5.2.2.3.8 MS1H2-25C30CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	100		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	2.5		
Voltage (V)	380		
Rated torque (N·m)	7.96		
Maximum torque (N·m)	23.9		
Rated frequency (Hz)	250		
Rated current (A)	7.2		Heatsink-based derating curve
Maximum current (A)	26		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.18		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	3.49 ± 10%	
	Motor with brake	4.3 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
8	24	17.6	32.73	0.73	≤ 100	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
45	≤ 686	≤ 196

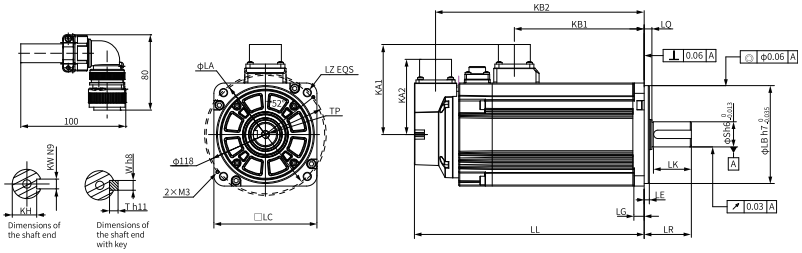Dimensions (mm)




LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
100	195 (223)	45 ± 1	115	4 × ϕ7	88	126	73	174.5 (202.5)	10	5 ± 0.3
LQ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
7.5 ± 0.75	95		24	M8 × 16	350 -0.62	200 -0.2	8	8	7	6.3 (7.35)


5.2.2.3.9 MS1H2-30C30CB-V33*R-INT

Motor specifications		
Frame size (mm)	130	
Inertia, capacity	Low inertia, medium capacity	
Rated power (kW)	3.0	
Voltage (V)	220	
Rated torque (N·m)	9.8	
Maximum torque (N·m)	24.5	
Rated frequency (Hz)	150	
Rated current (A)	16.6	
Maximum current (A)	55	
Rated speed (rpm)	3000	
Maximum speed (rpm)	6000	
Torque coefficient (N·m/A)	0.67	
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	6.4 ± 10%
	Motor with brake	9.38 ± 10%

Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

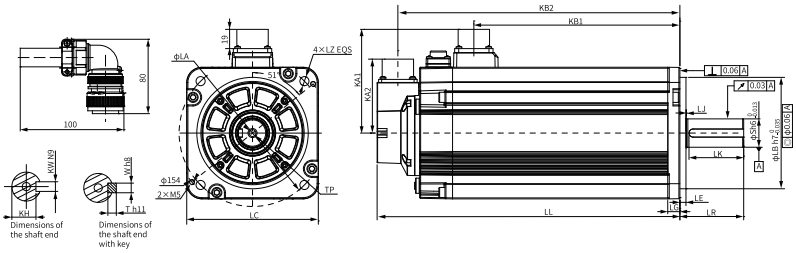Dimensions (mm)




LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	198 (223)	63 ± 1	145	4 × ϕ9	102.4	127.5	73	177.5 (202.5)	10.5	6 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	10.0 (11.9)


5.2.2.3.10 MS1H2-30C30CD-V33*R-INT

Motor specifications		
Frame size (mm)	130	
Inertia, capacity	Low inertia, medium capacity	
Rated power (kW)	3.0	
Voltage (V)	380	
Rated torque (N·m)	9.8	
Maximum torque (N·m)	29.4	
Rated frequency (Hz)	150	
Rated current (A)	8.9	
Maximum current (A)	29	
Rated speed (rpm)	3000	
Maximum speed (rpm)	6000	
Torque coefficient (N·m/A)	1.25	
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	6.4 ± 10%
	Motor with brake	9.38 ± 10%

Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392


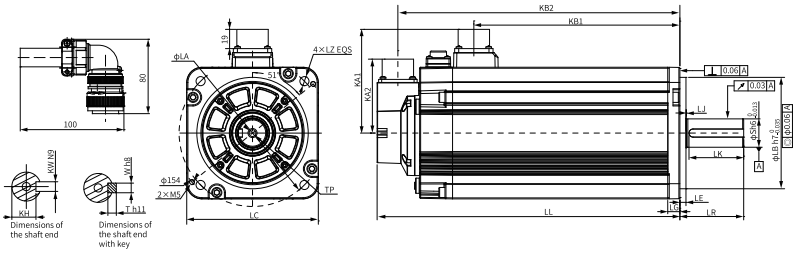
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	198 (223)	63 ± 1	145	4 × ϕ9	102.4	127.5	73	177.5 (202.5)	10.5	6 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	10.0 (11.9)

5.2.2.3.11 MS1H2-40C30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	4.0		
Voltage (V)	220		
Rated torque (N·m)	12.6		
Maximum torque (N·m)	31.5		
Rated frequency (Hz)	150		
Rated current (A)	22		Heatsink-based derating curve
Maximum current (A)	67.5		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	0.65		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	9 ± 10%	
	Motor with brake	11.98 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

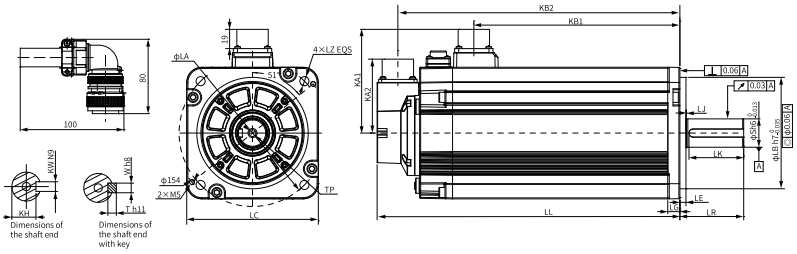Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	236 (261)	63 ± 1	145	4 × ϕ9	102.4	165.5	73	215.5 (240.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	13.2 (15.1)

5.2.2.3.12 MS1H2-40C30CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	4.0		
Voltage (V)	380		
Rated torque (N·m)	12.6		
Maximum torque (N·m)	37.8		
Rated frequency (Hz)	150		
Rated current (A)	13.5		Heatsink-based derating curve
Maximum current (A)	42.5		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.06		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	9 ± 10%	
	Motor with brake	11.98 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

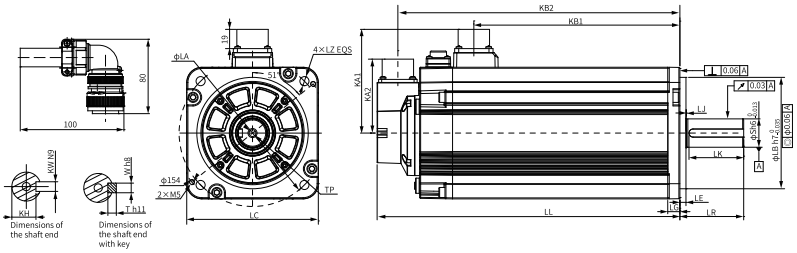Dimensions (mm)




LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	236 (261)	63 ± 1	145	4 × ϕ9	102.4	165.5	73	215.5 (240.5)	10.5	6 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	13.2 (15.1)


5.2.2.3.13 MS1H2-50C30CB-V33*R-INT

Motor specifications		
Frame size (mm)	130	
Inertia, capacity	Low inertia, medium capacity	
Rated power (kW)	5.0	
Voltage (V)	220	
Rated torque (N·m)	15.8	
Maximum torque (N·m)	39.5	
Rated frequency (Hz)	150	
Rated current (A)	22	
Maximum current (A)	67.5	
Rated speed (rpm)	3000	
Maximum speed (rpm)	6000	
Torque coefficient (N·m/A)	0.81	
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	11.6 ± 10%
	Motor with brake	14.58 ± 10%

Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392


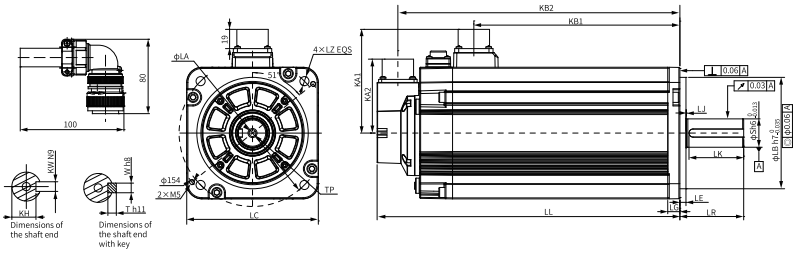
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	274 (299)	63 ± 1	145	4 × ϕ9	102.4	203.5	73	253.5 (278.5)	10.5	6 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	16.35 (18.25)

5.2.2.3.14 MS1H2-50C30CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Low inertia, medium capacity		
Rated power (kW)	5.0		
Voltage (V)	380		
Rated torque (N·m)	15.8		
Maximum torque (N·m)	47.4		
Rated frequency (Hz)	150		
Rated current (A)	17		Heatsink-based derating curve
Maximum current (A)	52.5		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6000		
Torque coefficient (N·m/A)	1.04		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	11.6 ± 10%	
	Motor with brake	14.58 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
63	≤ 1176	≤ 392

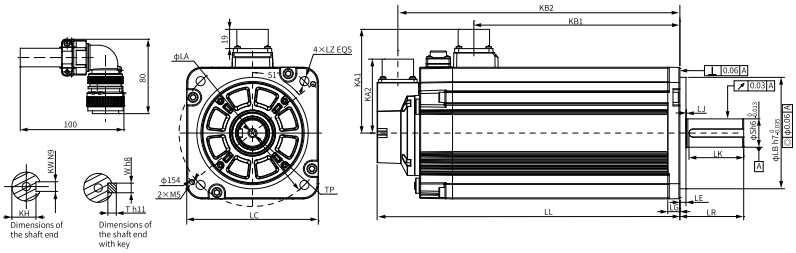Dimensions (mm)




LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	274 (299)	63 ± 1	145	4 × ϕ9	102.4	203.5	73	253.5 (278.5)	10.5	6 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		28	M8 × 20	530 $^{-0.62}$	240 $^{-0.2}$	8	8	7	16.35 (18.25)

5.2.2.4 Medium Inertia and Medium Capacity (MS1H3)


5.2.2.4.1 MS1H3-85B15CB-V33*R-INT

Motor specifications		
Frame size (mm)	130	
Inertia, capacity	Medium inertia, medium capacity	
Rated power (kW)	0.85	
Voltage (V)	220	
Rated torque (N·m)	5.39	
Maximum torque (N·m)	13.5	
Rated frequency (Hz)	125 m	
Rated current (A)	6.6	
Maximum current (A)	17.2	
Rated speed (rpm)	1500	
Maximum speed (rpm)	4500	
Torque coefficient (N·m/A)	0.93	
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	13.56 ± 10%
	Motor with brake	15.8 ± 10%

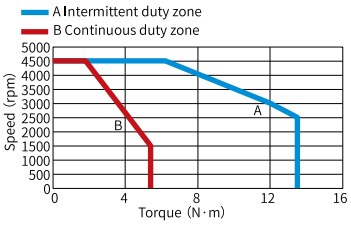Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196


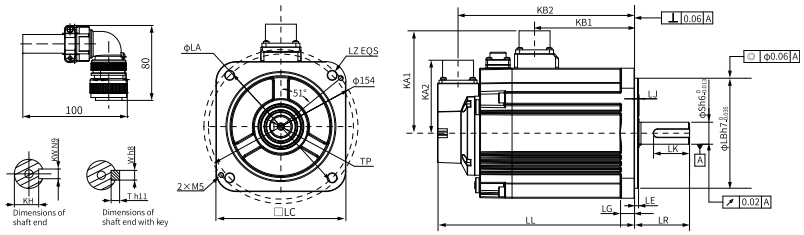
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	142 (167)	55 ± 1	145	4 × ϕ9	103	70	73	121.5 (146.5)	14	4

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	22	M6 × 20	350 -0.62	180 -0.2	8	8	7	5.8 (7.7)

5.2.2.4.2 MS1H3-85B15CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	0.85		
Voltage (V)	380		
Rated torque (N·m)	5.39		
Maximum torque (N·m)	13.5		
Rated frequency (Hz)	125 m		
Rated current (A)	3.5		Heatsink-based derating curve
Maximum current (A)	8.5		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.84		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	13.56 ± 10%	
	Motor with brake	15.8 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196

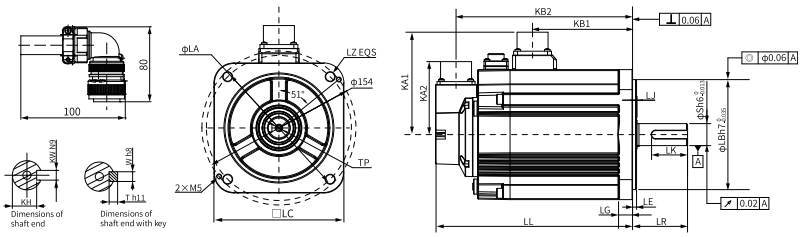Dimensions (mm)




LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	142 (167)	55 ± 1	145	4 × ϕ9	103	70	73	121.5 (146.5)	14	4

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	22	M6 × 20	$350_{-0.62}$	$180_{-0.2}$	8	8	7	5.8 (7.7)


5.2.2.4.3 MS1H3-13C15CB-V33*R-INT

Motor specifications		
Frame size (mm)	130	
Inertia, capacity	Medium inertia, medium capacity	
Rated power (kW)	1.3	
Voltage (V)	220	
Rated torque (N·m)	8.34	
Maximum torque (N·m)	20.85	
Rated frequency (Hz)	125 m	
Rated current (A)	10.5	
Maximum current (A)	27.3	
Rated speed (rpm)	1500	
Maximum speed (rpm)	4500	
Torque coefficient (N·m/A)	0.89	
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	19.25 ± 10%
	Motor with brake	21.5 ± 10%

Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196


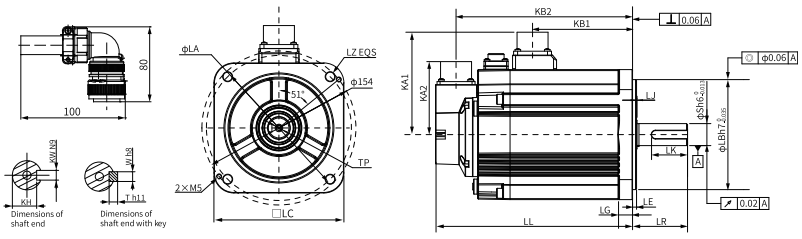
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	157 (182)	55 ± 1	145	4 × ϕ9	103	85	73	136.5 (161.5)	14	4

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	22	M6 × 20	350 $^{-0.62}$	180 $^{-0.2}$	8	8	7	7.1 (8.9)

5.2.2.4.4 MS1H3-13C15CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	1.3		
Voltage (V)	380		
Rated torque (N·m)	8.34		
Maximum torque (N·m)	20.85		
Rated frequency (Hz)	125 m		
Rated current (A)	5.1		Heatsink-based derating curve
Maximum current (A)	12.6		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.85		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	19.25 ± 10%	
	Motor with brake	21.5 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196


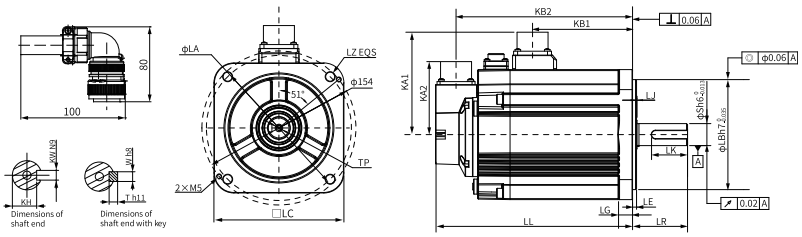
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	157 (182)	55 ± 1	145	4 × ϕ9	103	85	73	136.5 (161.5)	14	4

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	22	M6 × 20	350 $^{0}_{-0.62}$	180 $^{0}_{-0.2}$	8	8	7	7.1 (8.9)

5.2.2.4.5 MS1H3-18C15CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	130		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	1.8		
Voltage (V)	220		
Rated torque (N·m)	11.5		
Maximum torque (N·m)	28.75		
Rated frequency (Hz)	125 m		
Rated current (A)	11.9		Heatsink-based derating curve
Maximum current (A)	32.2		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.09		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	24.9 ± 10%	
	Motor with brake	27.2 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196

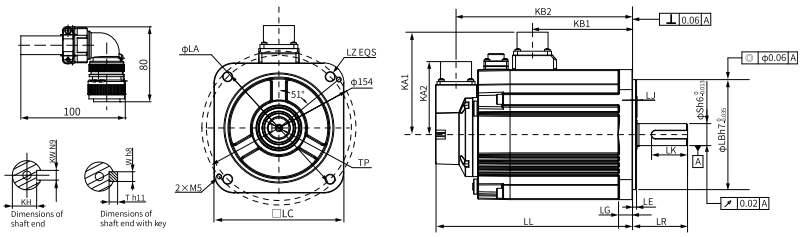Dimensions (mm)




LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	172 (197)	55 ± 1	145	4 × ϕ9	103	100	73	151.5 (176.5)	14	4
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110		22	M6 × 20	350 -0.62	180 -0.2	8	8	7	8.5 (10.3)


5.2.2.4.6 MS1H3-18C15CD-V33*R-INT

Motor specifications		
Frame size (mm)	130	
Inertia, capacity	Medium inertia, medium capacity	
Rated power (kW)	1.8	
Voltage (V)	380	
Rated torque (N·m)	11.5	
Maximum torque (N·m)	28.75	
Rated frequency (Hz)	125 m	
Rated current (A)	6.75	
Maximum current (A)	17.7	
Rated speed (rpm)	1500	
Maximum speed (rpm)	4500	
Torque coefficient (N·m/A)	1.87	
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	24.9 ± 10%
	Motor with brake	27.2 ± 10%

Torque-speed characteristics



Heatsink-based derating curve




Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
16	24	24	24	1	≤ 120	≤ 60	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
55	≤ 686	≤ 196


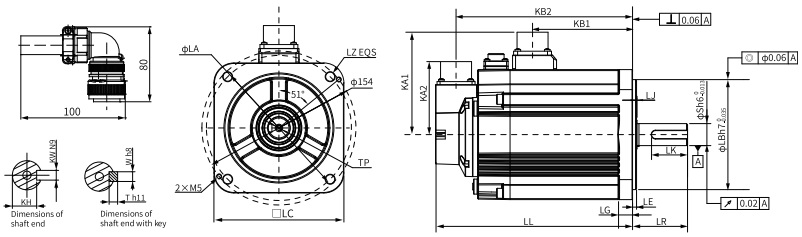
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
130	172 (197)	55 ± 1	145	4 × ϕ9	103	100	73	151.5 (176.5)	14	4

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.5 ± 0.75	110	22	M6 × 20	$350_{-0.62}$	$180_{-0.2}$	8	8	7	8.5 (10.3)

5.2.2.4.7 MS1H3-29C15CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	2.9		
Voltage (V)	220		
Rated torque (N·m)	18.6		
Maximum torque (N·m)	46.5		
Rated frequency (Hz)	125 m		
Rated current (A)	18		Heatsink-based derating curve
Maximum current (A)	52.5		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.16		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	44.7 ± 10%	
	Motor with brake	52.35 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490

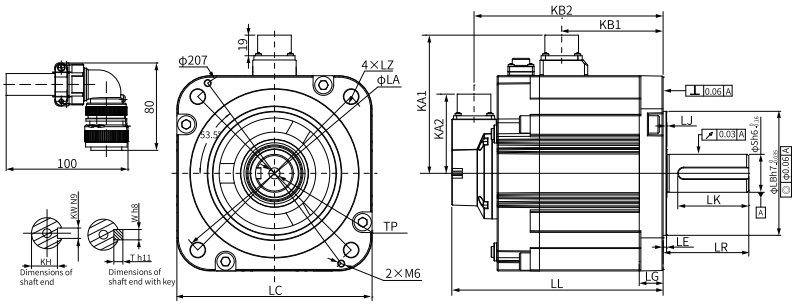Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	161 (194.8)	79 ± 1	200	4 × ϕ13.5	127.4	93.5	73	140.5 (174.3)	20.5	3.2 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3		35	M12 × 25	640 $^{-0.74}$	300 $^{-0.2}$	10	10	8	13.8 (17.9)

5.2.2.4.8 MS1H3-29C15CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	2.9		
Voltage (V)	380		
Rated torque (N·m)	18.6		
Maximum torque (N·m)	46.5		
Rated frequency (Hz)	125 m		
Rated current (A)	10.5		Heatsink-based derating curve
Maximum current (A)	29.75		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.94		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	44.7 ± 10%	
	Motor with brake	52.35 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490


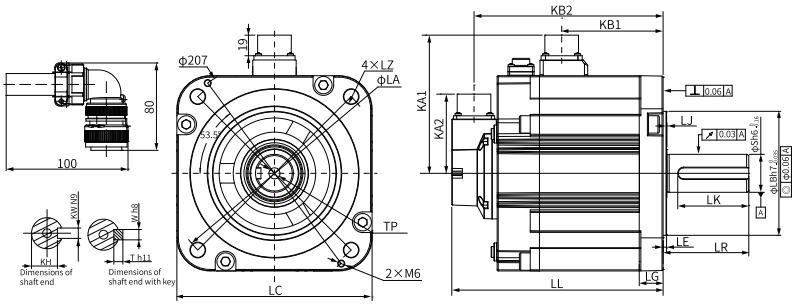
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	161 (194.8)	79 ± 1	200	4 × ϕ13.5	127.4	93.5	73	140.5 (174.3)	20.5	3.2 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3	35	M12 × 25	$640_{-0.74}$	$300^{-}_{0.2}$	10	10	8	13.8 (17.9)

5.2.2.4.9 MS1H3-44C15CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	4.4		
Voltage (V)	220		
Rated torque (N·m)	28.4		
Maximum torque (N·m)	71.1		
Rated frequency (Hz)	125 m		
Rated current (A)	25.5		Heatsink-based derating curve
Maximum current (A)	67		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.25		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	64.9 ± 10%	
	Motor with brake	72.55 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490

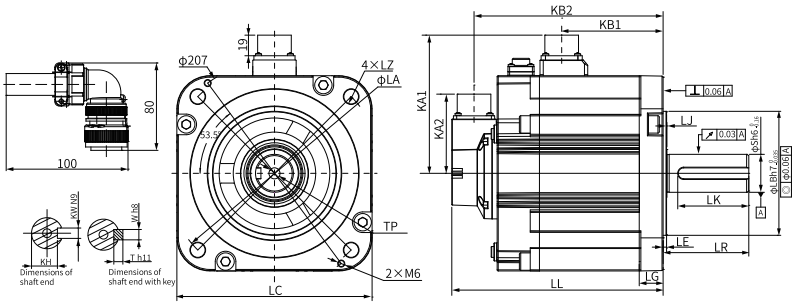Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	184.5 (218.3)	79 ± 1	200	4 × ϕ13.5	127.4	117	73	164 (197.8)	20.5	3.2 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3		35	M12 × 25	640 $^{-0.74}$	300 $^{-0.2}$	10	10	8	17.4 (21.9)

5.2.2.4.10 MS1H3-44C15CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	4.4		
Voltage (V)	380		
Rated torque (N·m)	28.4		
Maximum torque (N·m)	71.1		
Rated frequency (Hz)	125 m		
Rated current (A)	16		Heatsink-based derating curve
Maximum current (A)	42		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.96		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	64.9 ± 10%	
	Motor with brake	72.55 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
79	≤ 1470	≤ 490


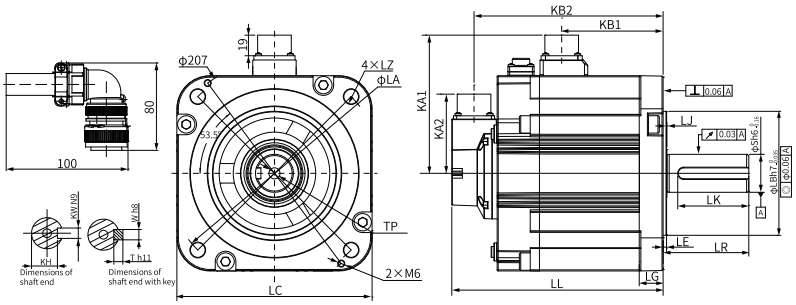
Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	184.5 (218.3)	79 ± 1	200	4 × ϕ13.5	127.4	117	73	164 (197.8)	20.5	3.2 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3	35	M12 × 25	640 $^{-0.74}$	300 $^{-0.2}$	10	10	8	17.4 (21.6)

5.2.2.4.11 MS1H3-55C15CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	5.5		
Voltage (V)	380		
Rated torque (N·m)	35		
Maximum torque (N·m)	87.6		
Rated frequency (Hz)	125 m		
Rated current (A)	20.7		Heatsink-based derating curve
Maximum current (A)	52		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	1.92		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	86.9 ± 10%	
	Motor with brake	94.55 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
113	≤ 1764	≤ 588

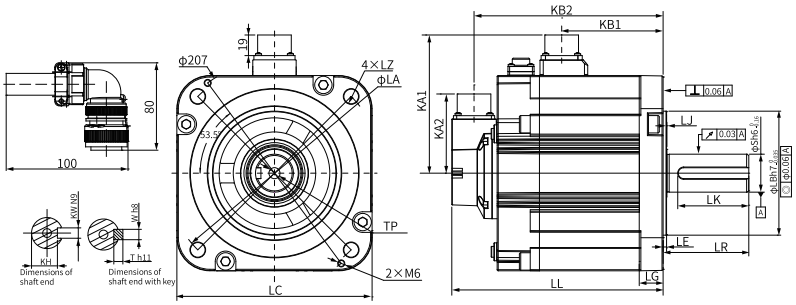Dimensions (mm)



LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	208 (241.8)	113 ± 1	200	4 × ϕ13.5	127.4	140.5	73	187.5 (221.3)	20.5	3.2 ± 0.3
LJ	LB		S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3		42	M16 × 32	950 $^{-0.87}$	370 $^{-0.2}$	12	12	8	21.7 (25.9)

5.2.2.4.12 MS1H3-75C15CD-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	180		
Inertia, capacity	Medium inertia, medium capacity		
Rated power (kW)	7.5		
Voltage (V)	380		
Rated torque (N·m)	48		
Maximum torque (N·m)	119		
Rated frequency (Hz)	125 m		
Rated current (A)	25		Heatsink-based derating curve
Maximum current (A)	65		
Rated speed (rpm)	1500		
Maximum speed (rpm)	4500		
Torque coefficient (N·m/A)	2.13		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	127.5 ± 10%	
	Motor with brake	135.15 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
50	24	31	18.58	1.29	≤ 200	≤ 100	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
113	≤ 1764	≤ 588

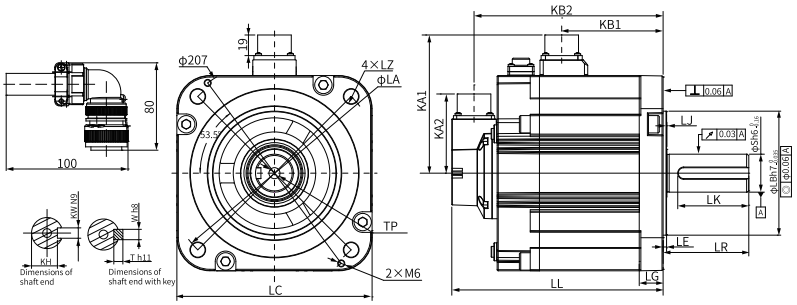Dimensions (mm)





LC	LL	LR	LA	LZ	KA1	KB1	KA2	KB2	LG	LE
180	255 (288.8)	113 ± 1	200	4 × ϕ13.5	127.4	187.5	73	234.5 (268.5)	20.5	3.2 ± 0.3

LJ	LB	S	TP	LK	KH	kW	W	T	Weight (kg)
0.3 ± 0.75	114.3	42	M16 × 32	950 $^{-0.87}$	370 $^{-0.2}$	12	12	8	29 (33.2)

5.2.2.5 Medium Inertia and Small Capacity (MS1H4)

5.2.2.5.1 MS1H4-05B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia and capacity	Medium inertia, small capacity		
Rated output (kW)	0.05		
Rated voltage (V)	220		
Rated torque (N·m)	0.16		
Maximum torque (N·m)	0.56		
Rated frequency (Hz)	350		
Rated current (A)	1.27		Heatsink-based derating curve
Maximum current (A)	4.78		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.15		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.038±10%	
	Motor with brake	0.04±10%	

Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable loads

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

Product dimensions (in mm)

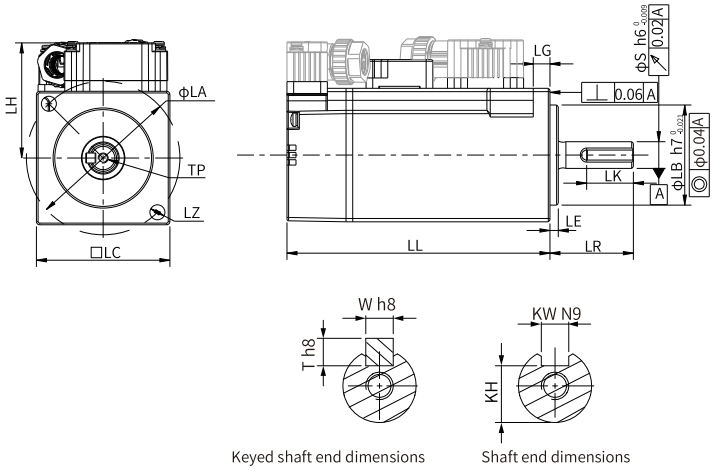


Figure 5-18 MS1H4-05B30CB-V330R-INT and MS1H4-05B30CB-V332R-INT

LL	LC	LR	LA	LZ	LH	LG	LE	
53.5 (80.8)	40	25±0.5	46	2 × ϕ4.5	34.5	5	2.5±0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 7	$14^{0}_{-0.36}$	$6.2^{0}_{-0.1}$	3	3	3	0.24 (0.40)

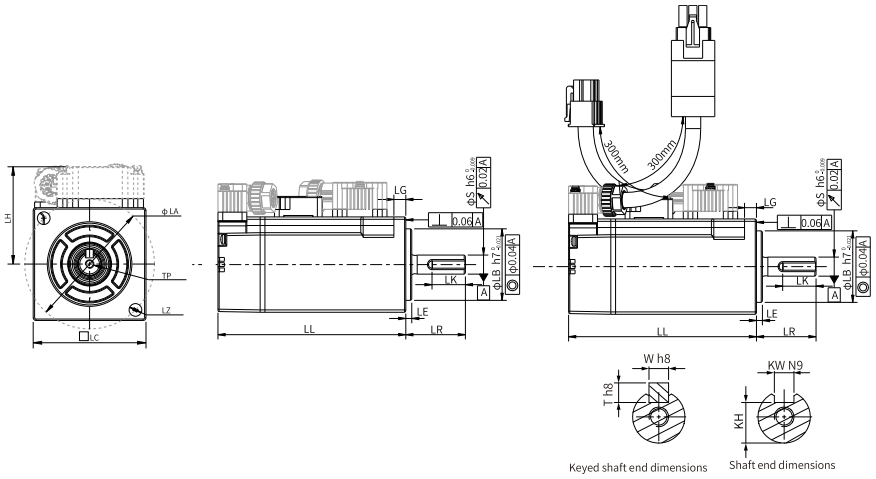




Figure 5-19 MS1H4-05B30CB-V331R-INT and MS1H4-05B30CB-V334R-INT

LL	LC	LR	LA	LZ	LH	LG	LE	
56.15 (83.45)	40	25±0.5	46	2 × ϕ4.5	34.5	5	2.5±0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 7	$140_{-0.36}$	$6.20_{-0.1}$	3	3	3	0.26 (0.42)

5.2.2.5.2 MS1H4-10B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	40		
Inertia and capacity	Medium inertia, small capacity		
Rated output (kW)	0.1		
Rated voltage (V)	220		
Rated torque (N·m)	0.32		
Maximum torque (N·m)	1.12		
Rated frequency (Hz)	350		
Rated current (A)	1.27		Heatsink-based derating curve
Maximum current (A)	4.78		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.29		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.072±10%	
	Motor with brake	0.074±10%	

Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
0.32	24	6.9	83.5	0.29	≤ 40	≤ 20	≤ 1.5

Allowable loads

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
20	≤ 78	≤ 54

Product dimensions (in mm)

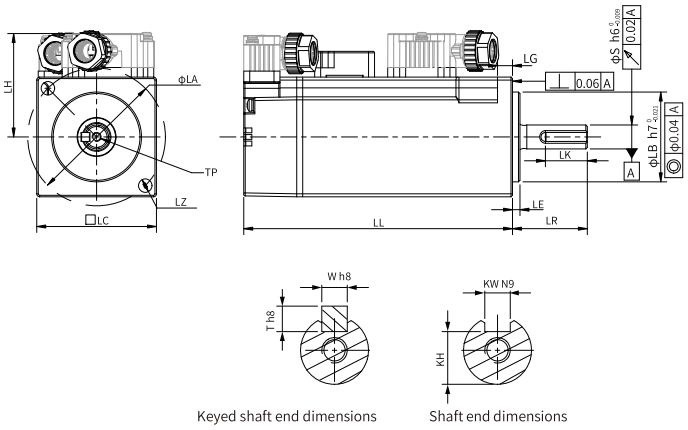


Figure 5-20 MS1H4-10B30CB-V330R-INT and MS1H4-10B30CB-V332R-INT

LL	LC	LR	LA	LZ	LH	LG	LE	
64.5 (91.8)	40	25±0.5	46	2 × ϕ4.5	34.5	5	2.5±0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 7	$14^{0}_{-0.36}$	$6.2^{0}_{-0.1}$	3	3	3	0.32 (0.48)

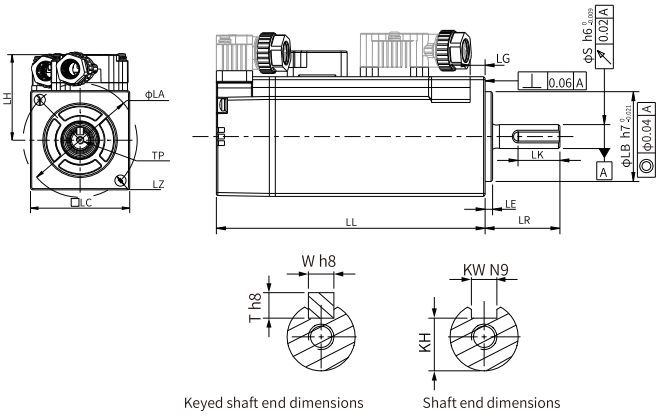




Figure 5-21 MS1H4-10B30CB-V331R-INT and MS1H4-10B30CB-V334R-INT

LL	LC	LR	LA	LZ	LH	LG	LE	
67.15 (94.45)	40	25±0.5	46	2 × ϕ4.5	34.5	5	2.5±0.5	
S	LB	TP	LK	KH	kW	W	T	Weight (kg)
8	30	M3 × 7	$140_{-}^{0.36}$	$6.20_{-0.1}$	3	3	3	0.34 (0.50)

5.2.2.5.3 MS1H4-20B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	60		
Inertia, capacity	Medium inertia, low capacity		
Rated power (kW)	0.2		
Voltage (V)	220		
Rated torque (N·m)	0.64		
Maximum torque (N·m)	2.24		
Rated frequency (Hz)	250		
Rated current (A)	1.3		Heatsink-based derating curve
Maximum current (A)	5.3		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.55		
Rotor moment of inertia ($kg \cdot cm^2$)	Motor without brake	0.22 ± 10%	
	Motor with brake	0.23 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1.5

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

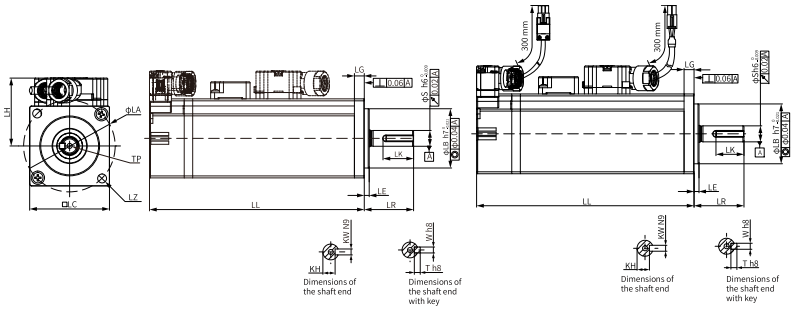Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	73.5 (101.1)	30 ± 0.5	70	4 × ϕ5.5	44	8.0	3 ± 0.5	
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
50	14	M5 × 8	$16.50_{-0.53}$	$110_{-0.1}$	5	5	5	0.78 (1.16)

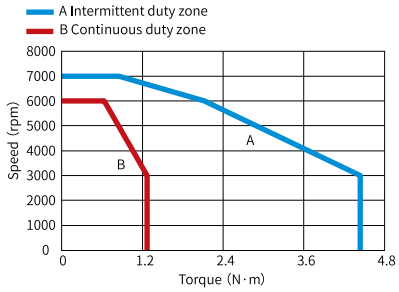5.2.2.5.4 MS1H4-40B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	60		
Inertia and capacity	Medium inertia, small capacity		
Rated power (kW)	0.4		
Voltage (V)	220		
Rated torque (N·m)	1.27		
Maximum torque (N·m)	4.45		
Rated frequency (Hz)	250		
Rated current (A)	2.4		Heatsink-based derating curve
Maximum current (A)	9.2		
Rated speed (rpm)	3000		
Maximum Speed (rpm)	7000		
Torque coefficient (N·m/A)	0.58		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	0.43±10%	
	Motor with brake	0.44±10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
1.5	24	7.6	75.79	0.32	≤ 60	≤ 20	≤ 1.5

Allowable loads



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
25	≤ 245	≤ 74

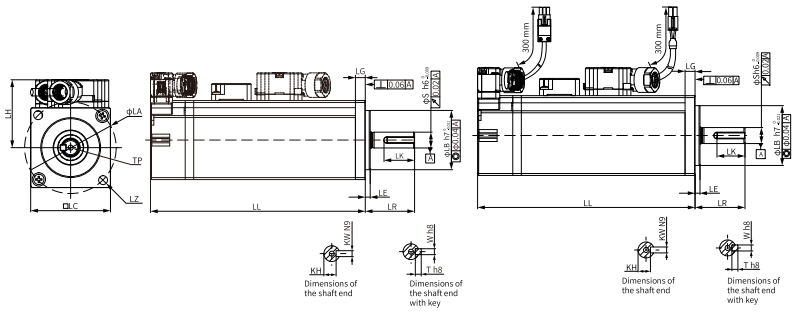Product dimensions (in mm)



LC	LL	LR	LA	LZ	LH	LG	LE	
60	92 (119.8)	30±0.5	70	4 × ϕ5.5	44	8.0	3±0.5	
LB	S	TP	LK	KH	KW	W	T	Weight (kg)
50	14	M5 × 8	$16.5^{0}_{-0.53}$	$11^{0}_{-0.1}$	5	5	5	1.11 (1.48)

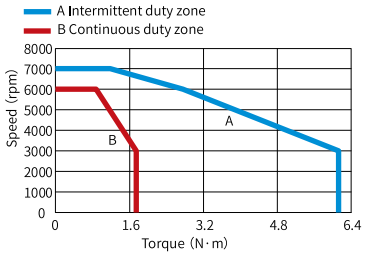
5.2.2.5.5 MS1H4-55B30CB-V331R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Medium inertia, low capacity		
Rated power (kW)	0.55		
Voltage (V)	220		
Rated torque (N·m)	1.75		
Maximum torque (N·m)	6.13		
Rated frequency (Hz)	250		
Rated current (A)	3.3		Heatsink-based derating curve
Maximum current (A)	13.2		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.58		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	1.12 ± 10%	
	Motor with brake	-	

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

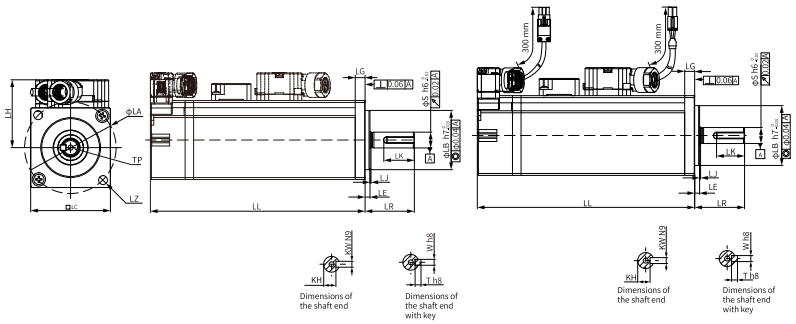Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	96.7	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 $^{0.62}_{-}$	15.50 $_{-0.1}$	6	6	6	1.85

5.2.2.5.6 MS1H4-75B30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Medium inertia, small capacity		
Rated power (kW)	0.75		
Voltage (V)	220		
Rated torque (N·m)	2.39		
Maximum torque (N·m)	8.37		
Rated frequency (Hz)	250		
Rated current (A)	4.4		Heatsink-based derating curve
Maximum current (A)	16.9		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.63		
Rotor moment of inertia ($kg \cdot cm^2$)	Brake-less motor	1.46±10%	
	Brake motor	1.51±10%	


Electrical specifications of the brake

Holding torque (N·m)	Supply voltage (VDC)±10%	Rated power (W)	Coil resistance (Ω)±10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load



LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

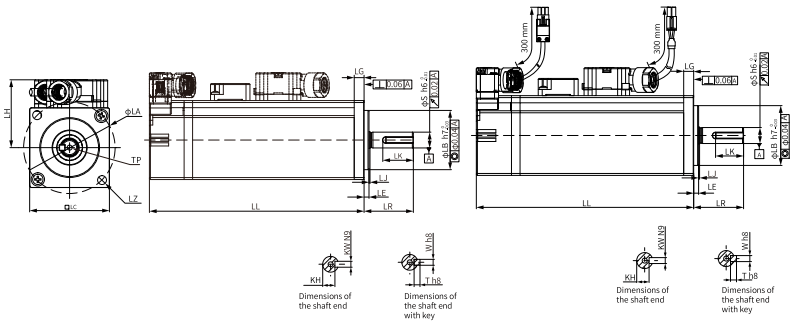Product dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	107.3 (140.5)	35± 0.5	90	4 x ϕ7	54	7.5	3±0.5	0.5±0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6x20	$25^{0}_{-0.62}$	$15.5^{0}_{-0.1}$	6	6	6	2.18 (2.82)

5.2.2.5.7 MS1H4-10C30CB-V33*R-INT

Motor specifications			Torque-speed characteristics
Frame size (mm)	80		
Inertia, capacity	Medium inertia, low capacity		
Rated power (kW)	1.0		
Voltage (V)	220		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	11.13		
Rated frequency (Hz)	250		
Rated current (A)	6.5		Heatsink-based derating curve
Maximum current (A)	24		
Rated speed (rpm)	3000		
Maximum speed (rpm)	7000		
Torque coefficient (N·m/A)	0.53		
Rotor moment of inertia ($kg·cm^2$)	Motor without brake	1.87 ± 10%	
	Motor with brake	1.97 ± 10%	


Electrical specifications of the brake

Holding torque (N·m)	Power supply voltage (VDC) ± 10%	Rated power (W)	Coil resistance (Ω) ± 10%	Excitation current (A)	Apply time (ms)	Release time (ms)	Backlash (°)
3.2	24	10	57.6	0.42	≤ 60	≤ 40	≤ 1

Allowable load

LF (mm)	Allowable radial load (N)	Allowable axial load (N)
35	≤ 392	≤ 147

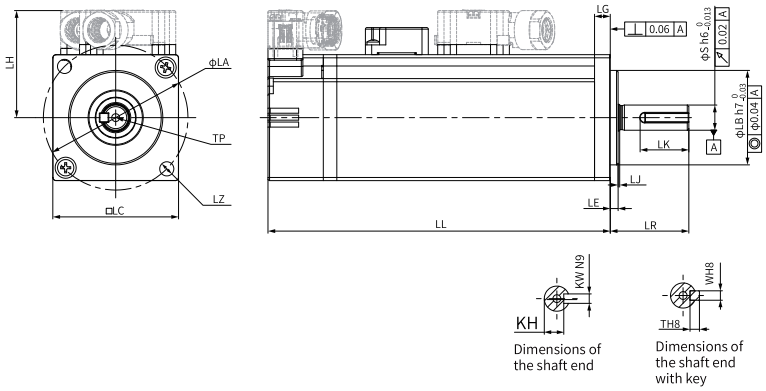Dimensions (mm)



LC	LL	LR	LA	LZ	LH	LG	LE	LJ
80	118.7 (153.2)	35 ± 0.5	90	4 × ϕ7	54	7.5	3 ± 0.5	0.5 ± 0.35
LB	S	TP	LK	KH	kW	W	T	Weight (kg)
70	19	M6 × 20	250 - 0.62	15.50 -0.1	6	6	6	2.55 (2.9)

6 Options

6.1 Cables









6.1.1 Power Cable





Power cable model

S6-L-M ① 0 ② 0 ③ 1 ④ - 3.0 ⑤ - T ⑥ - X ⑦ - INT ⑧

① **Cable type** S6-L-M: Power cable for motion control M: Without brake	③ **Cross-sectional area** 0: Flange sizes 25/40/60/80 mm 1: Frame sizes 100/130/180 mm with drive rated current lower than 13 A 2: Frame sizes 180 mm with drive rated power higher than 13 A 4: 4 × 2.5 mm^2 5: 4 × 1.5 mm^2 6: 4 × 0.75mm^2 B: 4 × 12 AWG	⑤ **Cable length (m)** 3.0: 3 5.0: 5 8.0: 8 10.0: 10 12.0: 12 15.0: 15 20.0: 20
② **Connector type at drive side** 0: U-shaped terminal 1: Pin terminal	④ **Connector type on the motor end** 0: 6-core plastic connector 1: 9-core aviation connector 2: 6-core aviation connector 7: MS1 custom connector (front outlet) 8: MS1 custom connector (rear outlet) D: AVIC JY27P14-4TK2 aviation plug	⑥ **Special requirements** Blank: Fixed cables T: Cable in the drag chain ≥ 10 million times TTS: Drag chain shielding ≥ 20 million times
		⑦ **Customized or branded** Blank: Default 2: Brand xx
		⑧ **Version** INT: International version

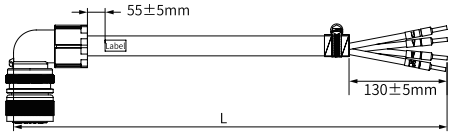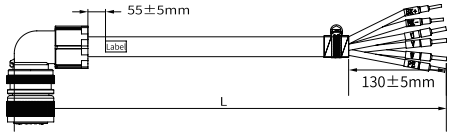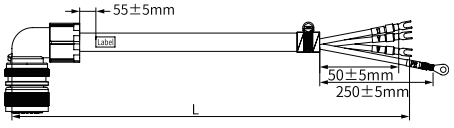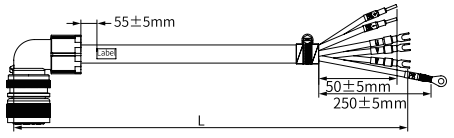List of Power Cables (Compatible with MS1-R-INT Series Motor)

Motor model	Cable		Cable model	Cable length (mm)	Appearance
MS1H1/ MS1H4 motor	Front outlet	Without brake	S6-L-M107-3.0 (-T) -INT	3000	
			S6-L-M107-5.0 (-T) -INT	5000	
			S6-L-M107-10.0 (-T) -INT	10000	
		With brake	S6-L-B107-3.0 (-T) -INT	3000	
			S6-L-B107-5.0 (-T) -INT	5000	
			S6-L-B107-10.0 (-T) -INT	10000	
	Rear outlet	Without brake	S6-L-M108-3.0 (-T) -INT	3000	
			S6-L-M108-5.0 (-T) -INT	5000	
			S6-L-M108-10.0 (-T) -INT	10000	
		With brake	S6-L-B108-3.0 (-T) -INT	3000	
			S6-L-B108-5.0 (-T) -INT	5000	
			S6-L-B108-10.0 (-T) -INT	10000	
MS1H2 motors rated 3 kW or below/ MS1H3 motors rated 1.8 kW or below	Without brake		S6-L-M111-3.0 (-T) -INT	3000	
			S6-L-M111-5.0 (-T) -INT	5000	
			S6-L-M111-10.0 (-T) -INT	10000	
	With brake		S6-L-B111-3.0 (-T) -INT	3000	
			S6-L-B111-5.0 (-T) -INT	5000	
			S6-L-B111-10.0 (-T) -INT	10000	
MS1H2 motors rated 4 kW/5 kW	Without brake		S6-L-M011-3.0 (-T) -INT	3000	
			S6-L-M011-5.0 (-T) -INT	5000	
			S6-L-M011-10.0 (-T) -INT	10000	
	With brake		S6-L-B011-3.0 (-T) -INT	3000	
			S6-L-B011-5.0 (-T) -INT	5000	
			S6-L-B011-10.0 (-T) -INT	10000	

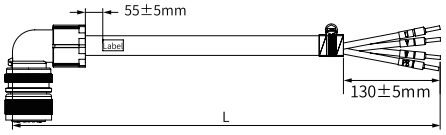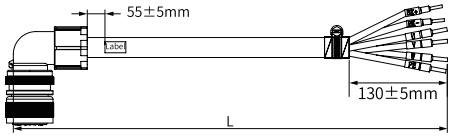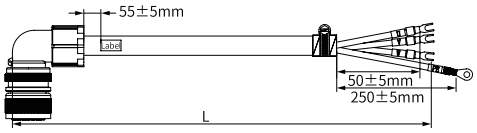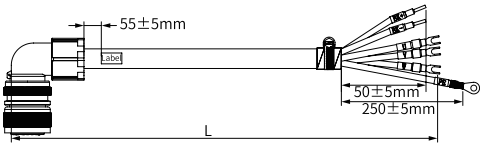Motor model	Cable	Cable model	Cable length (mm)	Appearance
MS1H3 motors (2.9 kW)	Without brake	S6-L-M112-3.0 (-T) -INT	3000	
		S6-L-M112-5.0 (-T) -INT	5000	
		S6-L-M112-10.0 (-T) -INT	10000	
	With brake	S6-L-B112-3.0 (-T) -INT	3000	
		S6-L-B112-5.0 (-T) -INT	5000	
		S6-L-B112-10.0 (-T) -INT	10000	
MS1H3 (4.4 kW and above)	Without brake	S6-L-M022-3.0 (-T) -INT	3000	
		S6-L-M022-5.0 (-T) -INT	5000	
		S6-L-M022-10.0 (-T) -INT	10000	
	With brake	S6-L-B022-3.0 (-T) -INT	3000	
		S6-L-B022-5.0 (-T) -INT	5000	
		S6-L-B022-10.0 (-T) -INT	10000	

List of Motor Model Selection (Compatible with LMC Linear Module)

For details about power cable models, see *"1.3 List of Motor Model Selection (Compatible with LMC Linear Module)" on page 11*.

List of Power Cables (Compatible with ISM Series Torque Motor)

For details about power cable models, see *"1.5 List of Motor Model Selection (Compatible with ISM Series Torque Motor)" on page 12*.

List of Power Cables (Compatible with MP Series Torque Motor)

For details about power cable models, see *"1.4 List of Motor Model Selection (Compatible with MP Series Torque Motor)" on page 12*.







6.1.2 Encoder Cable

Encoder cable model

S6-L-P ① 1 ② 2 ③ 1 ④ - 3.0 ⑤ - T ⑥ - X ⑦ - X ⑧ - X ⑨ - INT ⑩

① **Cable type** S6-L-P: Encoder cable	④ **Connector type on the motor end** 1: 17-core military-spec connector 4: MS1 custom connector (front outlet) 5: MS1 custom connector (rear outlet) A: RSF (MS15 series) and Inovance (EL0I) pulse-type grating C: DB15 with 2 rows of LAMOTION (RU2 series) grating D: Inovance communication-type incremental grating/magnetic grating G: DB9 plug H: USB plug N: TSUN absolute magnetic grating (2 rows of DB9 females) P: LAMOTION absolute magnetic grating (2 rows of DB9 females)	⑥ **Special requirements** Blank: Fixed cables T: Cable in the drag chain ≥ 10 million times TTS: Drag chain shielding ≥ 20 million times
② **Connector type at drive side** 1: USB plug 2: DB15 connector		⑦ **Customized or branded** Blank: Default 2: Brand xx
		⑧ **Hall sensor** Blank: Without Hall H: With Hall
③ **Encoder application mode** 1: Communication-type incremental encoder 2: Communication-type multi-turn absolute encoder 3: Optical grating 4: Magnetic scale 5: 23-bit single-turn absolute encoder	⑤ **Cable length (m)** 0.5: 0.5 3.0: 3 5.0: 5 8.0: 8 10.0: 10 12.0: 12 15.0: 15 20.0: 20	⑨ **Limit** Empty: No limit L: With limit
		⑩ **Version** INT: International version

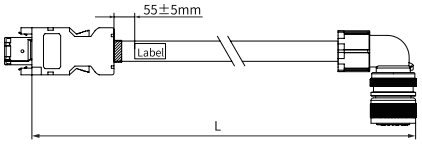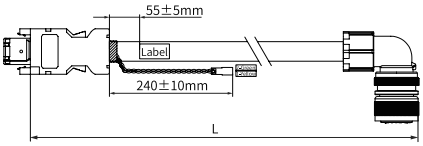List of encoder cables

Motor model	Cable		Cable model	Cable length (mm)	Appearance
MS1H1/ MS1H4 terminal-type motor	Front outlet	Single-turn absolute encoder cable	S6-L-P114-3.0 (-T) -INT	3000	
			S6-L-P114-5.0 (-T) -INT	5000	
			S6-L-P114-10.0 (-T) -INT	10000	
		Multi-turn absolute	S6-L-P124-3.0 (-T) -INT	3000	
			S6-L-P124-5.0 (-T) -INT	5000	
			S6-L-P124-10.0 (-T) -INT	10000	
	Rear outlet	Single-turn absolute encoder cable	S6-L-P115-3.0 (-T) -INT	3000	
			S6-L-P115-5.0 (-T) -INT	5000	
			S6-L-P115-10.0 (-T) -INT	10000	
		Multi-turn absolute	S6-L-P125-3.0 (-T) -INT	3000	
			S6-L-P125-5.0 (-T) -INT	5000	
			S6-L-P125-10.0 (-T) -INT	10000	
MS1H2/MS1H3 motors		Single-turn absolute encoder cable	S6-L-P111-3.0 (-T) -INT	3000	
			S6-L-P111-5.0 (-T) -INT	5000	
			S6-L-P111-10.0 (-T) -INT	10000	
		Multi-turn absolute	S6-L-P121-3.0 (-T) -INT	3000	
			S6-L-P121-5.0 (-T) -INT	5000	
			S6-L-P121-10.0 (-T) -INT	10000	

Note

- The encoder cable is equipped with a shield as standard.
- [1]: The 6-conductor cable can be used in normal cases. The cable is reserved for compatibility with the original battery model. It is not required to be connected to the battery box during actual use.

List of encoder cables (compatible with LMC linear module)

Readhead type	Cable length (m)				
	3	5	8	10	12
RSF-MS15 series, RU2 series, Inovance pulse-type grating (DB15, two rows), Renishaw grating, and LAMOTION RU2 grating without limits (Without Hall sensor, without limit switch)	S6-L-P23A-3.0-TTS-2-INT	S6-L-P23A-5.0-TTS-2-INT	S6-L-P23A-8.0-TTS-2-INT	S6-L-P23A-10.0-TTS-2-INT	S6-L-P23A-12.0-TTS-2-INT
RSF-MS15 series, RU2 series, Inovance pulse-type grating (DB15, two rows), Renishaw grating, and LAMOTION RU2 grating without limits (With Hall, without limit)	S6-L-P23A-3.0-TTS-2-H-INT	S6-L-P23A-5.0-TTS-2-H-INT	S6-L-P23A-8.0-TTS-2-H-INT	S6-L-P23A-10.0-TTS-2-H-INT	S6-L-P23A-12.0-TTS-2-H-INT
Inovance communication-type ELMI magnetic grating/ELOI grating (Without Hall sensor, without limit switch)	S6-L-P24D-3.0-TTS-2-INT	S6-L-P24D-5.0-TTS-2-INT	S6-L-P24D-8.0-TTS-2-INT	S6-L-P24D-10.0-TTS-2-INT	S6-L-P24D-12.0-TTS-2-INT
Inovance communication-type ELMI magnetic grating/ELOI grating (With Hall, without limit)	S6-L-P24D-3.0-TTS-2-H-INT	S6-L-P24D-5.0-TTS-2-H-INT	S6-L-P24D-8.0-TTS-2-H-INT	S6-L-P24D-10.0-TTS-2-H-INT	S6-L-P24D-12.0-TTS-2-H-INT
LAMOTION grating (RU2 series) with limit (No Hall or limit)	S6-L-P23C-3.0-TTS-2-L-INT	S6-L-P23C-5.0-TTS-2-L-INT	S6-L-P23C-8.0-TTS-2-L-INT	S6-L-P23C-10.0-TTS-2-L-INT	S6-L-P23C-12.0-TTS-2-L-INT
LAMOTION grating (RU2 series) with limit (With Hall and limit)	S6-L-P23C-3.0-TTS-2-H-L-INT	S6-L-P23C-5.0-TTS-2-H-L-INT	S6-L-P23C-8.0-TTS-2-H-L-INT	S6-L-P23C-10.0-TTS-2-H-L-INT	S6-L-P23C-12.0-TTS-2-H-L-INT

List of encoder cables (compatible with ISM series torque motor)

Motor model	Servo drive SV670-INT	Encoder extension cable length (3 m)	Encoder extension cable length (5 m)	Encoder extension cable length (10 m)
ISMT1-160F12AB-A113X-INT ISMT1-160F12AB-A133X-INT	S2R8	S6-L-P22D-3.0-TTS-INT	S6-L-P22D-5.0-TTS-INT	S6-L-P22D-10.0-TTS-INT
ISMT1-160F45AB-A133X-INT				

List of encoder cables (compatible with MP series torque motor)

Motor model	Servo drive SV670-INT	Extension cable length (3 m)	Extension cable length (5 m)	Extension cable length (10 m)
MP1-112F10AB-U313X-INT	S2R8	S6-L-P22D-3.0-TTS-INT	S6-L-P22D-5.0-TTS-INT	S6-L-P22D-10.0-TTS-INT
MP1-140S10BB-U323X-INT	S012	S6-L-P22D-3.0-TTS-INT	S6-L-P22D-5.0-TTS-INT	S6-L-P22D-10.0-TTS-INT
MP1-175S11BB-U333X-INT	S012	S6-L-P22D-3.0-TTS-INT	S6-L-P22D-5.0-TTS-INT	S6-L-P22D-10.0-TTS-INT
MP1-220S15BB-U323X-INT	S012	S6-L-P25G-3.0-INT	S6-L-P25G-5.0-INT	S6-L-P25G-10.0-INT
MP1-220S30BD-U323X-INT	T021	S6-L-P25G-3.0-INT	S6-L-P25G-5.0-INT	S6-L-P25G-10.0-INT
MP1-220S30BD-U323L-C-INT	T026	S6-L-P25G-3.0-INT	S6-L-P25G-5.0-INT	S6-L-P25G-10.0-INT







6.1.3 Communication cable

Communication cable model





$$\underset{①}{\text{S6-L-T}} - \underset{②}{02} - \underset{③}{0.3}$$













① **Cable type** S6-L-T: Motion control communication cable	② **Cable connection type** 01: Multi-drive communication cable (CAN and RS485) 02: Servo drive to PLC communication cable 03: Drive communication termination resistor cable (CAN and RS485) 04: Drive network communication cable (CaT.5 and PROFINET) 07: Drive network communication cable (CaT.6 and PROFINET) 08: Drive network communication cable (CaT.7 and PROFINET)	③ **Cable length (m)** 0.3: 0.3 2.0: 2 ...

List of communication cables







Cable	Cable model	Cable length (mm)	Appearance
Communication cable for multi-drive parallel connection	S6-L-T01-0.3	300	
Servo drive to PLC communication cable	S6-L-T02-2.0	2000	
plug for terminal matching resistor for servo drive communication	S6-L-T03-0.0	-	
Servo drive communication cables (CAT.5E and PROFINET)	S6-L-T04-0.3	300	
Servo drive communication cables (CAT.T6A and PROFINET)	S6-L-T07-0.3	300	
Servo drive communication cables (CAT.7 and PROFINET)	S6-L-T08-0.3	300	





6.1.4 Connector kit

Cable	Cable model	Appearance
Battery box kit (without battery)	S6-C4A-NB	
Battery kit	S6-C4A	
CN1 terminal (DB44)	S6-C8	
CN7 terminal (DB15)	S6-C6	

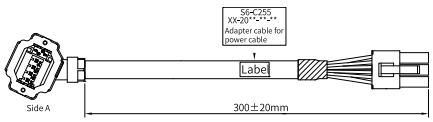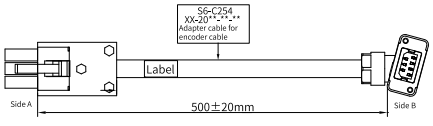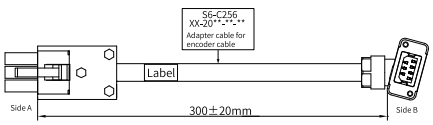Cable	Cable model	Appearance
Shield bracket	S6-C25 (Optional for size A to size C)	
	S6-C27 (Optional for size D to size E)	
Power plug (< 750 W) on the motor side	S6-C246	
Encoder plug (< 750 W) on the motor side	S6-C247	
Power connector for frame sizes 100 to 130 at motor side with power above 1000 W	S6-C248	
Power connector for frame size 180 at motor side with power above 1000 W	S6-C249	
Encoder connector at motor side with power above 1000 W	S6-C250	
CN2(1394)	S6-C251	
Battery box connector	S6-C252	
Power flying leads at motor side with power below 750 W - 500 mm	S6-C253	
Power flying leads at motor side with power below 750 W - 300 mm	S6-C255	
Encoder flying leads at motor side with power below 750 W - 500 mm	S6-C254	
Encoder flying leads at motor side with power below 750 W - 300 mm	S6-C256	

6.1.5 Description of Cable Terminals

<table>
<tr><th>Name</th><th>Diagram</th><th colspan="3">Power cable 6-pin connector</th><th colspan="3">7-pin connector of the encoder on the motor side</th><th colspan="3">6-pin male on the drive side</th></tr>
<tr><td rowspan="9">Assignment of terminals on the terminal-type motor side (frame sizes 40/60/80)</td><td rowspan="9"></td><td colspan="3"></td><td colspan="3"></td><td colspan="3"></td></tr>
<tr><td>Pin No.</td><td>Signal name</td><td>Color</td><td>Pin No.</td><td>Signal name</td><td>Color</td><td>Pin No.</td><td>Signal name</td><td>Color</td></tr>
<tr><td>1</td><td>PE</td><td>Yellow/ Green</td><td>1</td><td>PS+</td><td>Gray</td><td>1</td><td>+5 V</td><td>White</td></tr>
<tr><td>2</td><td>W</td><td>Black 3</td><td>2</td><td>PS-</td><td>Pink</td><td>2</td><td>GND</td><td>Brown</td></tr>
<tr><td>3</td><td>V</td><td>Black 2</td><td>3</td><td>DC+</td><td>Yellow</td><td>5</td><td>PS+</td><td>Gray</td></tr>
<tr><td>4</td><td>U</td><td>Black 1</td><td>4</td><td>DC-</td><td>Green</td><td>6</td><td>PS-</td><td>Pink</td></tr>
<tr><td>5</td><td rowspan="2">-</td><td>White</td><td>5</td><td>+5 V</td><td>White</td><td rowspan="3">Enclosure</td><td rowspan="3">PE</td><td rowspan="3">-</td></tr>
<tr><td rowspan="2">6</td><td rowspan="2">Brown</td><td>6</td><td>GND</td><td>Brown</td></tr>
<tr><td>7</td><td>PE</td><td>-</td></tr>
<tr><td rowspan="9">Assignment of terminals on the motor side (frame sizes 100/130)</td><td rowspan="9"></td><td colspan="3">Power Cable Connector</td><td colspan="3">Encoder Cable Connector</td><td colspan="3">6-pin male on the drive side</td></tr>
<tr><td colspan="3"></td><td colspan="3"></td><td colspan="3"></td></tr>
<tr><td>Pin No.</td><td>Pin No.</td><td>Color</td><td>Pin No.</td><td>Signal name</td><td>Color</td><td>Pin No.</td><td>Signal name</td><td>Color</td></tr>
<tr><td>B</td><td>U</td><td>Black 1</td><td>A</td><td>PS+</td><td>Gray</td><td>1</td><td>+5 V</td><td>White</td></tr>
<tr><td>I</td><td>V</td><td>Black 2</td><td>B</td><td>PS-</td><td>Pink</td><td>2</td><td>GND</td><td>Brown</td></tr>
<tr><td>F</td><td>W</td><td>Black 3</td><td>E</td><td>DC+</td><td>Yellow</td><td>5</td><td>PS+</td><td>Gray</td></tr>
<tr><td>G</td><td>PE</td><td>Yellow/ Green</td><td>F</td><td>DC-</td><td>Green</td><td>6</td><td>PS-</td><td>Pink</td></tr>
<tr><td>C</td><td rowspan="3">-</td><td>Black 4</td><td>G</td><td>+5 V</td><td>White</td><td rowspan="3">Enclosure</td><td rowspan="3">PE</td><td rowspan="3">-</td></tr>
<tr><td rowspan="2">E</td><td rowspan="2">Black 5</td><td>H</td><td>GND</td><td>Brown</td></tr>
<tr><td>J</td><td>Shield</td><td>-</td></tr>
</table>

<table>
<tr><td rowspan="10">Assignment of terminals on the motor side (frame size 180)</td><td rowspan="10"></td><td colspan="3">Power Cable Connector</td><td colspan="3">Encoder Cable Connector</td><td colspan="3">6-pin male on the drive side</td></tr>
<tr><td colspan="3">
</td><td colspan="3">
</td><td colspan="3">
</td></tr>
<tr><td>Pin No.</td><td>Pin No.</td><td>Color</td><td>Pin No.</td><td>Signal name</td><td>Color</td><td>Pin No.</td><td>Signal name</td><td>Color</td></tr>
<tr><td>A</td><td>U</td><td>Black 1</td><td>A</td><td>PS+</td><td>Gray</td><td>1</td><td>+5 V</td><td>White</td></tr>
<tr><td>C</td><td>V</td><td>Black 2</td><td>B</td><td>PS-</td><td>Pink</td><td>2</td><td>GND</td><td>Brown</td></tr>
<tr><td>E</td><td>W</td><td>Black 3</td><td>E</td><td>DC+</td><td>Yellow</td><td>5</td><td>PS+</td><td>Gray</td></tr>
<tr><td>F</td><td>PE</td><td>Yellow/ Green</td><td>F</td><td>DC-</td><td>Green</td><td>6</td><td>PS-</td><td>Pink</td></tr>
<tr><td>B</td><td rowspan="2">-</td><td>Black 4</td><td>G</td><td>+5 V</td><td>White</td><td rowspan="2">Enclosure</td><td rowspan="2">PE</td><td rowspan="2">-</td></tr>
<tr><td rowspan="2">D</td><td rowspan="2">Black 5</td><td>H</td><td>GND</td><td>Brown</td></tr>
<tr><td>J</td><td>Shield</td><td>-</td></tr>
</table>

6.2 Peripheral Electrical Components

6.2.1 List of Peripheral Electrical Components

Component	Installation position	Applicable model	Function overview
Fuse and circuit breaker	Input side of the drive	All models	To comply with EN 61800-5-1 and UL 61800-5-1 standards, install a fuse/circuit breaker on the input side of the drive to prevent accidents caused by short circuit in the internal circuit.
Electromagnetic contactor	Input side of the drive		Used to switch on or off the circuit.
AC input reactor	Input side of the drive		Used to eliminate the high harmonics of the input side effectively and improve the power factor on the input side.
EMC filter	Input side of the drive		Reduces the conduction and radiation interference generated by the AC drive to external devices.
Magnetic ring and magnetic buckle	Output side of the drive		Reduces interference to the outside and the bearing current.
	Signal cable		Improves the anti-interference performance of signals.

6.2.2 Fuse (CE)

To prevent accidents caused by short circuit, install a fuse on the input side of the drive.

Table 6–1 Recommended fuse

Drive model SV670-INT series			Recommended fuse Rated current (A)
Size	Model	Rated input current (A)	
Single-phase 200 V			
A	S1R6	2.3	5
	S2R8	4.0	12
C	S5R5	7.9	12
	S7R6	9.6	15
D	S012	12.8	20
Three-phase 200 V			
A	S1R6	1.1	5
	S2R8	2.3	5
C	S5R5	4.4	12
	S7R6	5.1	12
D	S012	8.0	15
E	S018	8.7	20
	S022	11.0	20
	S027	23.8	32
Three-phase 400 V			
C	T3R5	2.4	5
	T5R4	3.6	10
D	T8R4	5.6	15
	T012	8.0	15
E	T017	12.0	20
	T021	16.0	25
	T026	21.0	30

The recommended values in the preceding table are based on the following conditions. If the conditions vary from the prerequisites described in the table, select a model according to the actual conditions.

- The ambient temperature of the device is 35°C without forced air cooling.
- The altitude is 2000 m.
- Only a single drive is installed.
- The current-carrying density of the conductor is 1.3 A/mm^2.

When you select a fuse, take into account the maximum input surge current parameter in the "Electrical Specifications" section of the User Guide to ensure that the fuse pre-arcing (I^2t) can withstand surge current conditions multiple times over its expected service life.

6.2.3 Fuse (UL)

Table 6–2 Recommended protective device for the drive

Drive model SV670-INT series			Recommended non-semiconductor fuse
Size	Model	Continuous input current of main circuit (A)	Rated current (A)
Single-phase 200 V			
A	S1R6	2.3	6
	S2R8	4	10

Drive model SV670-INT series			Recommended non-semiconductor fuse
Size	Model	Continuous input current of main circuit (A)	Rated current (A)
C	S5R5	7.9	15
	S7R6	9.6	20
D	S012	12.8	20
Three-phase 200 V			
A	S1R6	1.1	6
	S2R8	2.3	6
C	S5R5	4.4	10
	S7R6	5.1	10
D	S012	8.0	15 to 20
E	S018	8.7	15 to 40
	S022	11.0	20 to 40
	S027	23.8	40
Three-phase 400 V			
C	T3R5	2.4	6 to 10
	T5R4	3.6	6 to 10
D	T8R4	5.6	10 to 20
	T012	8.0	15 to 20
E	T017	12.0	20 to 40
	T021	16.0	30 to 40
	T026	21.0	35 to 40

The recommended values in the preceding table are based on the following conditions. If the conditions vary from the prerequisites described in the table, select a model according to the actual conditions.

- The ambient temperature of the device is 35°C without forced air cooling.
- The altitude is 2000 m.
- Only a single drive is installed.
- The current-carrying density of the conductor is 1.3 A/mm^2.

When you select a fuse, take into account the maximum input surge current parameter in the "Electrical Specifications" section of the User Guide to ensure that the fuse pre-arcing (I^2t) can withstand surge current conditions multiple times over its expected service life.

Fuse selection requirements:

If the short-circuit current rating is 5 kA/65 kA and the drive size is A/C/D/E, it is recommended to use a class J or class CC fuse that complies with the UL 248 standard. If you use a class CC fuse, the maximum allowable rating of the circuit breaker is 30 A.

6.2.4 Electromagnetic contactor

Table 6–3 Recommended electromagnetic contactor models

Servo drive SV670-INT Series			Recommended contactor		
Size	Model	Rated input current (A)	Manufacturer	Current (A)	Model
Single-phase 200 V					
A	S1R6	2.3	Schneider	9	LC1 D09
	S2R8	4.0		9	LC1 D09
C	S5R5	7.9		9	LC1 D09
	S7R6	9.6		12	LC1 D12
D	S012	12.8		18	LC1 D18
Three-phase 200 V					
A	S1R6	1.1	Schneider	9	LC1 D09
	S2R8	2.3			
C	S5R5	4.4			
	S7R6	5.1			
D	S012	8.0		9	LC1 D09
E	S018	8.7		12	LC1 D12
	S022	11.0			
	S027	23.8		25	LC1 D25
Three-phase 400 V					
C	T3R5	2.4	Schneider	9	LC1 D09
	T5R4	3.6		9	LC1 D09
D	T8R4	5.6		9	LC1 D09
	T012	8.0		9	LC1 D09
E	T017	12.0		18	LC1 D18
	T021	16.0		18	LC1 D18
	T026	21.0		25	LC1 D25

6.2.5 Circuit Breaker (CE)

Table 6–4 Recommended circuit breaker models

Drive model SV670-INT series			Recommended circuit breaker Rated current (A)
Size	Model	Rated input current (A)	
Single-phase 200 V			
A	S1R6	2.3	4
	S2R8	4.0	6
C	S5R5	7.9	16
	S7R6	9.6	16
D	S012	12.8	20
Three-phase 200 V			
A	S1R6	1.1	4
	S2R8	2.3	4
C	S5R5	4.4	6
	S7R6	5.1	10
D	S012	8.0	16

Drive model SV670-INT series			Recommended circuit breaker Rated current (A)
Size	Model	Rated input current (A)	
E	S018	8.7	16
	S022	11.0	16
	S027	23.8	32
Three-phase 400 V			
C	T3R5	2.4	4
	T5R4	3.6	6
D	T8R4	5.6	10
	T012	8.0	16
E	T017	12.0	16
	T021	16.0	25
	T026	21.0	32

The recommended values in the preceding table are based on the following conditions. If the conditions vary from the prerequisites described in the table, select a model according to the actual conditions.

- The ambient temperature of the device is 35°C without forced air cooling.
- The altitude is 2000 m.
- Only a single drive is installed.
- The current-carrying density of the conductor is 1.3 A/mm^2.

When you select a circuit breaker, take into account parameter "Surge current (A)" in section "Electrical Specifications" in the User Guide. Make sure that the trip characteristics curve of the circuit breaker can support the surge current working conditions.

If a residual current device (RCD) is needed, select the RCD according to the following requirements:

- Use a B-type residual current device (RCD) because the drive may generate DC leakage current in the protective conductor.
- For each drive, use an RCD with tripping current not lower than 100 mA to prevent RCD malfunction due to high-frequency leakage current generated by the drive.
- When multiple drives are connected in parallel and one RCD is used, select an RCD whose tripping current is not lower than 300 mA.
- It is recommended to use Chint or Schneider RCDs.

6.2.6 Circuit Breaker (UL)

Table 6–5 Recommended protective device for the drive

Drive model SV670-INT series			Recommended inverse time circuit breaker (Breaking capacity 5 kA, compliant with UL 489)	Recommended inverse time circuit breaker (Breaking capacity 65 kA, compliant with UL 489)	Recommended inverse time circuit breaker[1] (Breaking capacity 5 kA or 65 kA, compliant with UL 489)
Size	Model	Continuous input current of main circuit (A)	Rated current (A)	Rated current (A)	Rated current (A)
Single-phase 200 V					
A	S1R6	2.3	5 to 15	-	≤ 40
	S2R8	4.0	8 to 15	-	≤ 40
C	S5R5	7.9	15	15	≤ 40
	S7R6	9.6	15	15	≤ 100
D	S012	12.8	20	20	≤ 100
Three-phase 200 V					
A	S1R6	1.1	5 to 15	-	≤ 40
	S2R8	2.3	5 to 15	-	≤ 40
C	S5R5	4.4	8 to 15	-	≤ 40
	S7R6	5.1	10 to 15	-	≤ 100
D	S012	8.0	15 to 20	15	≤ 100
E	S018	8.7	16 to 40	20	≤ 100
	S022	11.0	20 to 40	20	≤ 100
	S027	23.8	40	40	≤ 100
Three-phase 400 V					
C	T3R5	2.4	5 to 15	-	≤ 100
	T5R4	3.6	7 to 15	-	≤ 100
D	T8R4	5.6	12 to 20	-[2]	≤ 100
	T012	8.0	15 to 20	15	≤ 100
E	T017	12.0	25 to 40	25	≤ 100
	T021	16.0	30 to 40	30	≤ 100
	T026	21.0	40	40	≤ 100

The recommended values in the preceding table are based on the following conditions. If the conditions vary from the prerequisites described in the table, select a model according to the actual conditions.

- The ambient temperature of the device is 35°C without forced air cooling.
- The altitude is 2000 m.
- Only a single drive is installed.
- The current-carrying density of the conductor is 1.3 A/mm^2.

Circuit breaker selection requirements:

- When you select a circuit breaker, take into account parameter "Max. input surge current (A)" in section "Electrical Specifications" in the User Guide. Make sure that the trip characteristics curve of the circuit breaker can support the surge current working conditions.
- If the short-circuit current rating is 5 kA/65 kA and the drive size is A/C/D/E, it is recommended to use an inverse-time circuit breaker that complies with the UL 489 standard.
- [1]: It is recommended to refer to this column when you select circuit breakers for multi-drive parallel systems.
- [2]: For this drive model, when used with a circuit breaker having a breaking capacity of 65 kA, no recommended current value is provided. However, the rated current of this circuit breaker must not exceed the maximum rated current of the selected circuit breaker with a breaking capacity of 5 kA.

6.2.7 AC input reactor

Model selection

An AC input reactor is optional and mainly used to reduce harmonic waves in the input current. In applications where strong suppression of harmonics is required, install an external reactor. The following table lists the recommended manufacturers and models of input reactors.

Table 6–6 AC input reactor models

Servo drive SV670-INT series			Applicable Reactor	Inductance (mH)
Size	Model	Rated input current (A)		
Three-phase 200 V				
A	S1R6	1.1	MD-ACL-10-5-4T	5
	S2R8	2.3	MD-ACL-10-5-4T	5
C	S5R5	4.4	MD-ACL-10-5-4T	5
	S7R6	5.1	MD-ACL-10-5-4T	5
D	S012	8.0	MD-ACL-10-5-4T	5
E	S018	8.7	MD-ACL-15-3-4T	3
	S022	11.0	MD-ACL-15-3-4T	3
	S027	23.8	MD-ACL-40-1.45-4T	1.45
Three-phase 400 V				
C	T3R5	2.4	MD-ACL-10-5-4T	5
	T5R4	3.6	MD-ACL-10-5-4T	5
D	T8R4	5.6	MD-ACL-10-5-4T	5
	T012	8.0	MD-ACL-10-5-4T	5
E	T017	12.0	MD-ACL-15-3-4T	3
	T021	16.0	MD-ACL-40-1.45-4T	1.45
	T026	21.0	MD-ACL-40-1.45-4T	1.45

Dimensions

- Inovance input reactors

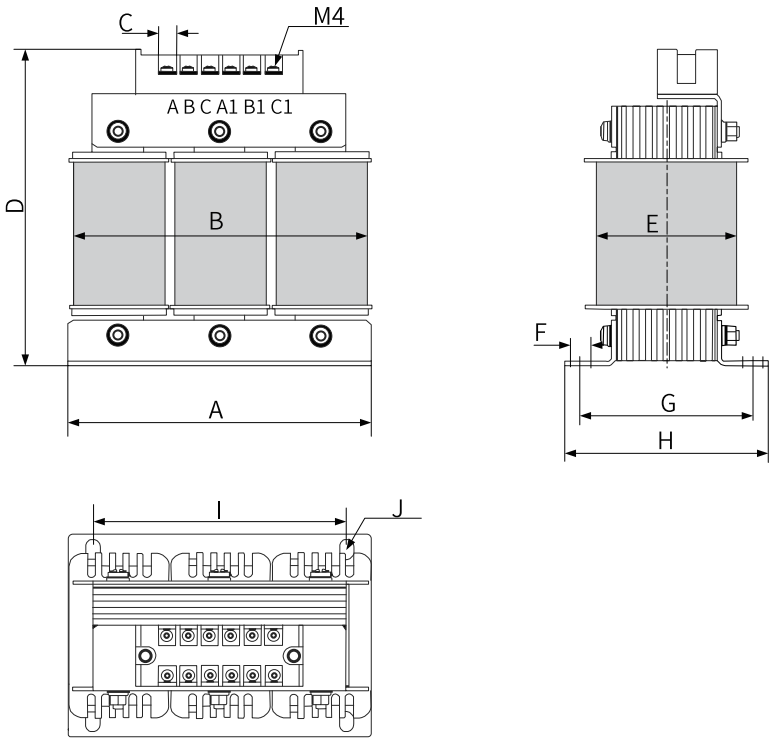


Figure 6-1 Dimension drawing of 10 A to 15 A AC input reactors

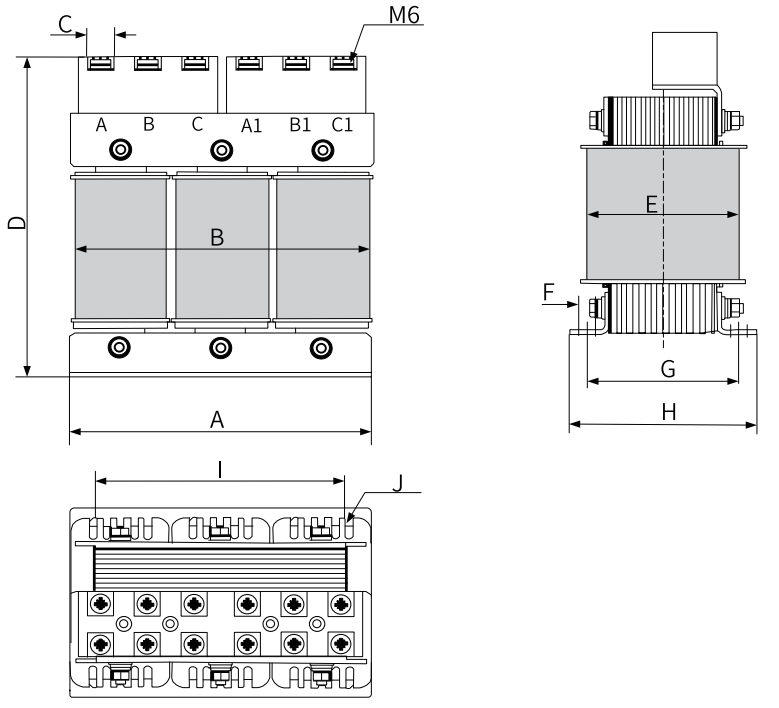


Figure 6-2 Dimensions of 40 A (1.45 mH) AC input reactors

Table 6–7 Dimensions of Inovance AC input reactors (unit: mm)

Model	A	B	C	D	E	F	G	H	I	J
MD-ACL-10-5-4T	150±2	155	8	160	80	10	85±2	100±2	125±1	Ø7 × 10
MD-ACL-15-3-4T	150±2	155	8	160	80	10	85±2	100±2	125±1	Ø7 × 10
MD-ACL-40-1.45-4T	180±2	185	16	200	105	10	95±2	117±2	150±1	Ø7 × 10

6.2.8 EMC Filter

Model selection

To comply with the radiated and conducted emission requirements of EN IEC 61800-3, install an external EMC filter. The recommended EMC filters for this drive are Schaffner FN2090 and FN3287 filters. Filters of equivalent specifications and performance from other brands are also acceptable. The specifications of Schaffner FN2090 and FN3287 filters are as follows.

Table 6–8 Standard EMC filter model and appearance

Filter model (recommended)		Appearance
Schaffner	FN2090	
	FN3287	

Table 6–9 Selection of filters

Servo drive SV670-INT series			Applicable filter (recommended)
Size	Model	Rated input current (A)	
Single-phase 200 V			
A	S1R6	2.3	FN2090-3-06
	S2R8	4.0	FN2090-4-06
C	S5R5	7.9	FN2090-8-06
	S7R6	9.6	FN2090-10-06
D	S012	12.8	FN2090-16-06
Three-phase 200 V			
A	S1R6	1.1	FN3287-10-44-C28-R65
	S2R8	2.3	FN3287-10-44-C28-R65
C	S5R5	4.4	FN3287-10-44-C28-R65
	S7R6	5.1	FN3287-10-44-C28-R65
D	S012	8.0	FN3287-10-44-C28-R65
E	S018	8.7	FN3287-10-44-C28-R65
	S022	11.0	FN3287-16-44-C33-R65
	S027	23.8	FN3287-25-33-C33-R65
Three-phase 400 V			
C	T3R5	2.4	FN3287-10-44-C28-R65
	T5R4	3.6	FN3287-10-44-C28-R65
D	T8R4	5.6	FN3287-10-44-C28-R65
	T012	8.0	FN3287-10-44-C28-R65

Servo drive SV670-INT series			Applicable filter (recommended)
Size	Model	Rated input current (A)	
E	T017	12.0	FN3287-16-44-C33-R65
	T021	16.0	FN3287-16-44-C33-R65
	T026	21.0	FN3287-25-33-C33-R65

Dimensions

- Dimensions of Schaffner FN2090 filters:

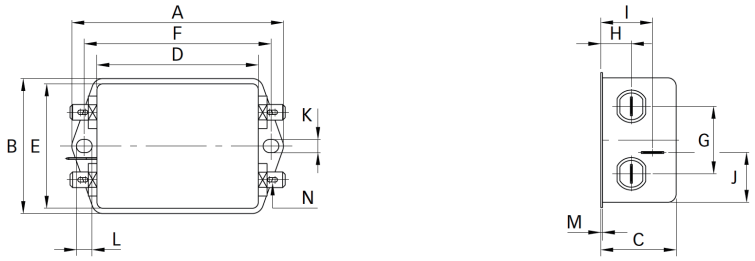


Figure 6-3 Dimensions of FN2090 filters (unit: mm)

Table 6–10 Dimensions of FN2090 filters (unit: mm)

Rated current (A)	A	B	C	D	E	F	G	H	I	J	K	L	M	N
3	85	54	30.3	64.8	49.8	75	27	12.3	20.8	19.9	5.3	6.3	0.7	6.3 × 0.8
4														
6														
8	113.5±1	57.5±1	45.4±1	94±1	56	103	25	12.4	32.4	15.5	4.4	6	1	6.3 × 0.8

- Dimensions of Schaffner FN3287 filters:

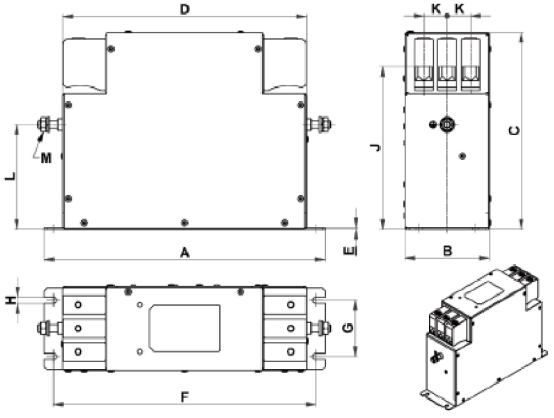


Figure 6-4 Dimensions of FN3287 filters (unit: mm)

Table 6–11 Dimensions of FN3287 filters (unit: mm)

Rated current (A)	A	B	C	D	E	F	G	H	J±2	K	L±1	M
10	180	40	112	153	0.8	170	20	4.5	94	11	68	M5
16	200	45	112	170	0.8	185	25	5.4	102	11	76	M5
25	205	45	132	173	0.8	190	25	5.4	113	13	83	M5

6.2.9 Magnetic Ring and Magnetic Buckle

The magnetic ring can be installed on the input or output side of the drive. Install the magnetic ring as close to the drive as possible. Installing the magnetic ring on the input side can suppress the noise in the input power supply system of the drive. A magnetic ring on the output side is mainly used to reduce the external interference of the drive and reduce the bearing current.

In applications with leakage current and signal cable interference, install a magnetic ring or a ferrite clamp.

Model selection

- Amorphous magnetic ring: supports high permeability when the frequency is within 1 MHz and excellent anti-interference performance, but is not as low-cost as the ferrite clamp. See *"Dimensions" on page 166* for details.
- Ferrite clamp: supports good interference suppression performance within a frequency band above 1 MHz, and is applicable to low-power servo drives and signal cables. It is low-cost and easy to install.

Magnetic ring and magnetic buckle (recommended)			Appearance
Type	Model	Manufacturer	
Magnetic ring	DY644020H	DAYOU-TECH	
	DY805020H	DAYOU-TECH	
Magnetic buckle	DYR-130-B	Dongyang Ferrite Material Co., Ltd	

Dimensions

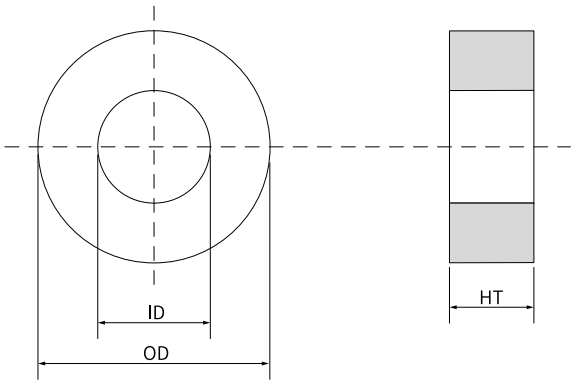


Figure 6-5 Dimensions of the magnetic ring

Table 6–12 Dimensions of the magnetic ring

Model	Dimension (OD × ID × HT) (mm)
DY644020H	64 × 40 × 20
DY805020H	80 × 50 × 20

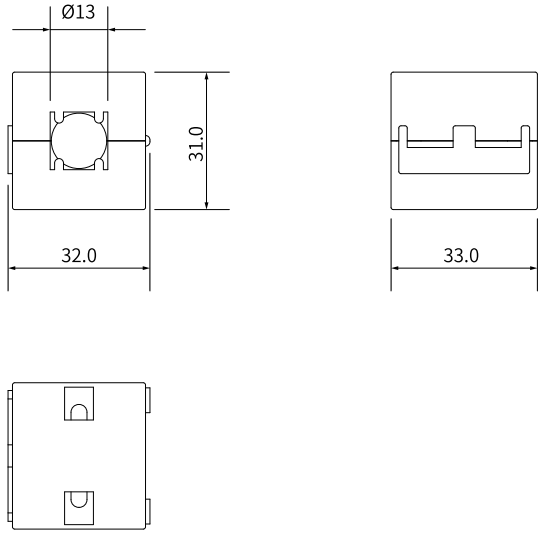


Figure 6-6 Dimensions of the magnetic buckle


Table 6–13 Dimensions of the magnetic buckle

Model	Dimension (width × outer diameter × inner diameter) (mm)
DYR-130-B	32.0 × 31 × 13

6.3 Shield bracket

To reduce electromagnetic interference, shield brackets and clamps are used with the drive cables.

Table 6–14 Shield bracket

Model	Drawing
S6-C25 (optional for size A to size C)	
S6-C27 (optional for size D to size E)	

6.4 Absolute Encoder Batteries

Model selection

Select an appropriate battery according to the following table.

Table 6–15 Battery specifications for the absolute encoder

Battery specification	Item and unit	Rated value			Condition
		Min. value	Typical value	Max. value	
Output: 3.6 V, 2700 mAh	External battery voltage (V)	3.2	3.6	3.8	In standby state[1]
	Circuit fault voltage (V)	-	2.6	-	In standby mode
	Battery alarm voltage (V)	2.85	3	3.15	-
	Current consumed by circuit (uA)	-	2	-	In normal operation[2]
		-	10	-	In standby mode, axis static
		-	300	-	In standby mode, axis rotating
	Battery working ambient temperature (℃)	0	-	40	Same as the ambient temperature required by the motor
	Battery storage ambient temperature (℃)	0	-	30	

The preceding data is measured in the ambient temperature of 20℃.

Note

- [1]: The "standby state" means the encoder counts the multi-turn data by using the power from the external battery when the servo drive power supply is not switched on. In this case, data transceiving stops.
- [2]: During normal operation, the absolute encoder supports one-turn or multi-turn data counting and transceiving. Power on the servo drive after connecting the absolute encoder properly. The encoder starts data transceiving after a short delay of about 5s upon power-on. The motor speed must be lower than or equal to 10 rpm during transition from the standby state to the normal operation state (upon power-on). Otherwise, Er.740 (Encoder fault) may occur. In this case, you need to power off and on the servo drive again.

6.5 Braking Resistor

When the motor torque direction is opposite to the speed direction, the energy is transmitted from the motor back to the servo drive, causing rise of the bus voltage. When the bus voltage rises to the braking threshold, the energy is consumed by the braking resistor according to the braking requirements. Otherwise, the drive will be damaged. You can use either a built-in or external braking resistor. Do not use a built-in braking resistor and an external braking resistor at the same time. Specifications of the braking resistor are as follows.

Table 6–16 Braking resistor specifications

<table>
<tr><th rowspan="2">Drive model</th><th colspan="3">Specifications of built-in braking resistors</th><th rowspan="2">Min. allowable resistance of external braking resistor (Ω) (H02.21)</th></tr>
<tr><th>Resistance (Ω)</th><th>Power (Pr) (W)</th><th>Processing power Pa (W)</th></tr>
<tr><td>SV670*S1R6I-INT</td><td>-</td><td>-</td><td>-</td><td rowspan="3">40</td></tr>
<tr><td>SV670*S2R8I-INT</td><td>-</td><td>-</td><td>-</td></tr>
<tr><td>SV670*S5R5I-INT</td><td>50</td><td>50</td><td>40</td></tr>
<tr><td>SV670*S7R6I-INT</td><td rowspan="2">25</td><td rowspan="2">80</td><td rowspan="2">64</td><td>20</td></tr>
<tr><td>SV670*S012I-INT</td><td>15</td></tr>
<tr><td>SV670*S018I-INT</td><td rowspan="3">20</td><td rowspan="3">100</td><td rowspan="3">80</td><td rowspan="3">20</td></tr>
<tr><td>SV670*S022I-INT</td></tr>
<tr><td>SV670*S027I-INT</td></tr>
<tr><td>SV670*T3R5I-INT</td><td>100</td><td rowspan="4">80</td><td rowspan="4">64</td><td>80</td></tr>
<tr><td>SV670*T5R4I-INT</td><td>100</td><td>60</td></tr>
<tr><td>SV670*T8R4I-INT</td><td rowspan="2">50</td><td>45</td></tr>
<tr><td>SV670*T012I-INT</td><td>40</td></tr>
<tr><td>SV670*T017I-INT</td><td rowspan="3">35</td><td rowspan="3">100</td><td rowspan="3">80</td><td>35</td></tr>
<tr><td>SV670*T021I-INT</td><td rowspan="2">25</td></tr>
<tr><td>SV670*T026I-INT</td></tr>
</table>

Note

- The symbol "*" indicates that the servo drive model can be either SV670P-INT or SV670N-INT.
- The built-in braking resistor is not available in standard S1R6 and S2R8 models. You can install an external braking resistor as needed or contact Inovance to order customized S1R6 and S2R8 models that carry the built-in braking resistor.
- The processing power (P_a) of the built-in braking resistor is affected by the ambient temperature and actual load rate of the drive.

The kinetic energy generated upon braking of a reciprocating motor is converted into electric energy that is fed back to the bus capacitor. When the bus voltage rises above the braking voltage threshold, the braking resistor starts consuming the excessive energy fed back by the motor. Figure *"Figure 6-7" on page 169* shows the motor speed curve.

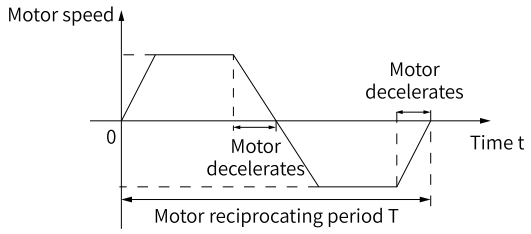


Figure 6-7 Motor speed curve

Energy calculation

The built-in braking resistor is not available in SV670* S1R6I-INT and SV670*S2R8I-INT models. An external braking resistor is needed when the rotational energy of the motor and the load exceeds the values listed in the following table.

Drive model	Regenerative Energy That Can Be Absorbed (W)	Remarks
SV670*S1R6I-INT	13.15	The input voltage of the main circuit power supply is 200 VAC.
SV670*S2R8I-INT	26.29	

- The following table shows the energy generated by a 200 V motor in decelerating from the rated speed to a standstill during no-load operation.
  Values inside the parentheses "()" are for the motor with a brake.

Table 6–17 200 V motor energy data

Capacity (kW)	Servo motor model MS1H*-*******-*****	Rotor inertia J(10^{-4} kg·m^2)	Braking energy generated from rated speed to standstill: E_O (J)	Max. braking energy absorbed by the capacitor E_C (J)
0.05	MS1H1-05B30CB-A330Z-INT MS1H1-05B30CB-A332Z-INT	0.026 (0.028)	0.13 (0.14)	9.3
0.1	MS1H1-10B30CB-A330Z-INT MS1H1-10B30CB-A332Z-INT	0.041 (0.043)	0.20 (0.21)	
0.2	MS1H1-20B30CB-A330R-INT MS1H1-20B30CB-A332R-INT	0.0938 (0.106)	0.46 (0.52)	
0.4	MS1H1-40B30CB-A330R-INT MS1H1-40B30CB-A332R-INT	0.145 (0.157)	0.72 (0.78)	18.59
0.55	MS1H1-55B30CB-A330R-INT	0.55	2.72	32.42
0.75	MS1H1-75B30CB-A330R-INT MS1H1-75B30CB-A332R-INT	0.68 (0.71)	3.36 (3.51)	32.42
1	MS1H1-10C30CB-A330R-INT MS1H1-10C30CB-A332R-INT	0.82 (0.87)	4.05 (4.30)	32.42
1	MS1H2-10C30CB-A331R-INT MS1H2-10C30CB-A334R-INT	1.78 (2.6)	8.80 (12.86)	32.42
1.5	MS1H2-15C30CB-A331R-INT MS1H2-15C30CB-A334R-INT	2.35 (3.17)	11.6 (15.68)	47.68

Capacity (kW)	Servo motor model MS1H*-*******-*****	Rotor inertia J(10^{-4} kg·m^2)	Braking energy generated from rated speed to standstill: E_O (J)	Max. braking energy absorbed by the capacitor E_C (J)
2.0	MS1H2-20C30CB-A331R-INT MS1H2-20C30CB-A334R-INT	2.92 (3.74)	14.44 (18.49)	78.19
2.5	MS1H2-25C30CB-A331R-INT MS1H2-25C30CB-A334R-INT	3.49 (4.3)	17.26 (21.26)	114.43
3.0	MS1H2-30C30CB-A331R-INT MS1H2-30C30CB-A334R-INT	6.4 (9.38)	31.65 (46.38)	114.43
4.0	MS1H2-40C30CB-A331R-INT MS1H2-40C30CB-A334R-INT	9 (11.98)	44.51 (59.24)	114.43
5.0	MS1H2-50C30CB-A331R-INT MS1H2-50C30CB-A334R-INT	11.6 (14.58)	57.36 (72.10)	114.43
0.85	MS1H3-85B15CB-A331R-INT MS1H3-85B15CB-A334R-INT	13.56 (15.8)	16.45 (17.3)	32.42
1.3	MS1H3-13C15CB-A331R-INT MS1H3-13C15CB-A334R-INT	19.25 (21.5)	22 (22.86)	47.68
1.8	MS1H3-18C15CB-A331R-INT MS1H3-18C15CB-A334R-INT	24.9 (27.2)	30.78 (33.63)	78.19
2.9	MS1H3-29C15CB-A331R-INT MS1H3-29C15CB-A334R-INT	44.7 (52.35)	55.26 (64.72)	114.43
4.4	MS1H3-44C15CB-A331R-INT MS1H3-44C15CB-A334R-INT	64.9 (72.55)	80.23 (89.69)	114.43
0.1	MS1H4-10B30CB-A330Z-INT MS1H4-10B30CB-A332Z-INT	0.102 (0.104)	0.50 (0.51)	9.3
0.2	MS1H4-20B30CB-A331R-INT MS1H4-20B30CB-A334R-INT	0.22 (0.23)	1.09 (1.14)	9.3
0.4	MS1H4-40B30CB-A331R-INT MS1H4-40B30CB-A334R-INT	0.43 (0.44)	2.13 (2.18)	18.59
0.55	MS1H4-55B30CB-A331R-INT	1.12	5.54	32.42
0.75	MS1H4-75B30CB-A331R-INT MS1H4-75B30CB-A334R-INT	1.46 (1.51)	7.22 (7.47)	32.42
1.0	MS1H4-10C30CB**31R-INT MS1H4-10C30CB**34R-INT	1.87 (1.97)	9.25 (9.74)	32.42

- The following table shows the energy generated by a 400 V motor in decelerating from the rated speed to a standstill during no-load operation.
  Values inside the parentheses "()" are for the motor with a brake.

Table 6–18 400 V motor energy data

Capacity (kW)	Servo motor model MS1H*-*******-*****	Rotor inertia J(10^{-4} kg·m^2)	Braking energy E_O (J) generated during process from no-load rated speed to a standstill (J)	Max. braking energy absorbed by the capacitor E_C (J)
1.0	MS1H2-10C30CD-A331R-INT MS1H2-10C30CD-A334R-INT	1.78 (2.6)	8.8 12.86	36.06
1.5	MS1H2-15C30CD-A331R-INT MS1H2-15C30CD-A334R-INT	2.35 (3.17)	11.62 (15.68)	43.77
2.0	MS1H2-20C30CD-A331R-INT MS1H2-20C30CD-A334R-INT	2.92 (3.74)	14.44 (18.49)	64.40
2.5	MS1H2-25C30CD-A331R-INT MS1H2-25C30CD-A334R-INT	3.49 (4.3)	17.26 (21.26)	64.40
3.0	MS1H2-30C30CD-A331R-INT MS1H2-30C30CD-A334R-INT	6.4 (9.38)	31.65 (46.38)	64.40
4.0	MS1H2-40C30CD-A331R-INT MS1H2-40C30CD-A334R-INT	9 (11.98)	44.51 (59.24)	105.62
5.0	MS1H2-50C30CD-A331R-INT MS1H2-50C30CD-A334R-INT	11.6 (14.58)	57.36 (72.10)	105.62
0.85	MS1H3-85B15CD-A331R-INT MS1H3-85B15CD-A334R-INT	13.56 (15.8)	16.76 (19.53)	36.06
1.3	MS1H3-13C15CD-A331R-INT MS1H3-13C15CD-A334R-INT	19.25 (21.5)	23.8 (26.58)	43.79
1.8	MS1H3-18C15CD-A331R-INT MS1H3-18C15CD-A334R-INT	24.9 (27.2)	30.78 (33.63)	64.40
2.9	MS1H3-29C15CD-A331R-INT MS1H3-29C15CD-A334R-INT	44.7 (52.35)	55.26 (64.72)	64.40
4.4	MS1H3-44C15CD-A331R-INT MS1H3-44C15CD-A334R-INT	64.9 (72.55)	80.23 (89.69)	105.62
5.5	MS1H3-55C15CD-A331R-INT MS1H3-55C15CD-A334R-INT	86.9 (94.55)	107.43 (116.89)	154.56
7.5	MS1H3-75C15CD-A331R-INT MS1H3-75C15CD-A334R-INT	127.5 (135.15)	157.62 (167.08)	154.56

If the total braking time T is known, you can determine whether an external braking resistor is required and the power required using the following flowchart and formula.

Braking resistor selection for rotary motor

- **Without external load torque**

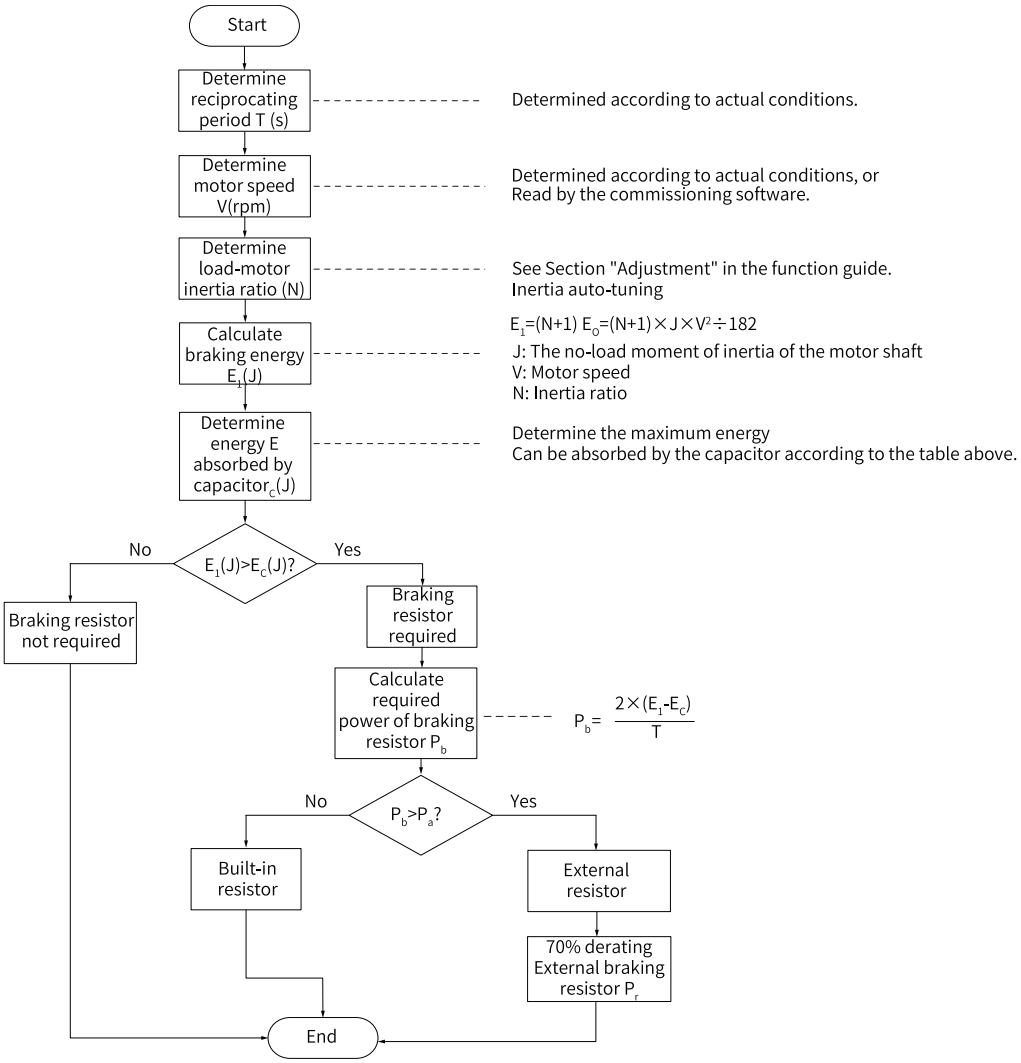


Figure 6-8 Flowchart for selecting the braking resistor

Table 6–19 Description of braking resistor selection factors

Factor	Unit	Definition
Reciprocating motion cycle T	s	Set it based on actual conditions.
Motor speed (V)	rpm	Determined based on actual operating conditions or read from the Inovance software tool.
Inertia ratio (N)	-	For details, see section "Tuning".
Rotor inertia (J)	kg·m²	For the specific rotor inertia of MS1 series motors, see *"Table 6-17 200 V motor energy data" on page 169*
Braking energy E_1	J	$E_1 = (N + 1) \times J \times V^2 \div 182$
Energy absorbed by capacitor E_c	J	For the maximum braking energy absorbed by capacitor, see *"Table 6-17 200 V motor energy data" on page 169*
Power of braking resistor (P_b)	W	$P_b = 2 \times (E_1 - E_C) \div T$
Power of built-in braking resistor (P_a)	W	The built-in braking resistor is not available in models S1R6 or S2R8 ($P_a = 0$). For details, see *"Table 6-16 Braking resistor specifications" on page 168*

Note

- Take the process in which the motor decelerates from 3,000 rpm to 0 RPM as an example. Assume that the load inertia is (N x Motor inertia). In this case, the braking energy is (N + 1) x E_O when the motor decelerates from 3,000 rpm to 0 rpm. The energy consumed by the braking resistor is (N + 1) x E_O - E_C (E_C represents the energy absorbed by the capacitor). Assume that the reciprocating cycle is T. In this case, the power required by the braking resistor is 2 x [(N + 1) x E_O - E_C]/T. For values of E_O and E_C, see *"Table 6-17 200 V motor energy data" on page 169* and *"Table 6-18 400 V motor energy data" on page 171*.
- Determine whether to use the braking resistor according to the preceding figure and select a built-in or an external braking resistor as needed. Then, set H02.25 accordingly.
- It is recommended to use a resistor enclosed by an aluminum case.

Take the H1 series 750 W model as an example. Assume that the reciprocating movement period T = 2s, maximum speed = 3000 RPM, inertia ratio = 4, the required regenerative resistor power is:

$$P_b = \frac{2\times[(N+1)\times E_O - E_C]}{T} = \frac{2\times[(4+1)\times 6.824 - 32.422]}{2} = 1.698W$$

The calculated result is smaller than the processing capacity (P_a = 40 W) of the built-in braking resistor, so a built-in braking resistor is enough.

If the inertia ratio is 10 and other conditions are the same, the required braking resistor power is:

$$P_b = \frac{2\times[(N+1)\times E_O - E_C]}{T} = \frac{2\times[(10+1)\times 6.824 - 32.422]}{2} = 42.642W$$

The calculation result is larger than the processing capacity (P_a = 40 W) of the built-in braking resistor, Therefore, an external braking resistor is required. The recommended power of the external braking resistor is P_b ÷ (1 - 70%) = 142.14 W.

☆ Related parameters:

Parameter	Comm. address	Function	Setpoint	Default value	Unit	Change mode
H02.21	2002-16h	Min. allowable resistance of braking resistor	1 to 1000	40	Ω	Read-only
H02.24	2002-19h	Resistor heat dissipation coefficient	10 to 100	30	%	Real time
H02.25	2002-1Ah	Braking resistor type	0: Built-in 1: External, natural cooling 2: External, forced air cooling 3: No resistor needed	3	-	Real time
H02.26	2002-1Bh	Power of external braking resistor	1 to 65535	40	W	Real time
H02.27	2002-1Ch	Resistance of external braking resistor	15 to 1000	50	Ω	Real time

- Braking resistor not needed

  When E_1 is smaller than E_C, no braking resistor is required because the braking energy can be absorbed by the bus capacitor. In this case, set H02.25 to 3.

- Using the built-in braking resistor
  When P_b is smaller than P_a and E_1 is greater than E_C, use the built-in braking resistor. In this case, set H02.25 to 0.

  When using the built-in regenerative resistor, connect terminals $P_\oplus$ and D with a jumper bar.

- Using an external braking resistor
  When P_b is greater than P_a, use an external braking resistor. Set H02.25 to 1 or 2 based on the cooling mode of the braking resistor.

  Use the external braking resistor with 70% derated, that is, $P_r = P_b \div (1 - 70\%)$, and ensure the resistance of the braking resistor is higher than the minimum allowable resistance allowed by the servo drive. Remove the jumper bar between terminals $P_\oplus$ and D, and connect the external braking resistor between terminals $P_\oplus$ and C.

  Set H02.25 to 1 or 2 based on the cooling mode of the braking resistor.

  ☆ Related parameters:

Parameter	Comm. address	Function	Setpoint	Default value	Unit	Change mode
H02.21	2002-16h	Min. allowable resistance of braking resistor	1 to 1000	40	Ω	Read-only
H02.25	2002-1Ah	Braking resistor type	0: Built-in 1: External, natural cooling 2: External, forced air cooling 3: No resistor needed	3	-	Real time
H02.26	2002-1Bh	Power of external braking resistor	1 to 65535	40	W	Real time
H02.27	2002-1Ch	Resistance of external braking resistor	15 to 1000	50	Ω	Real time

Caution

- Set the power and resistance of the external braking resistor in H02.26 and H02.27. Otherwise, this function may be unavailable.
- Make sure that the resistance of the external braking resistor is higher than or equal to the minimum allowable resistance.
- When the braking resistor is used at its rated power rather than the processing power (average value) in environments within the specified temperature range, the temperature of the resistor will rise to above 120°C under continuous braking. To ensure safety, cool the resistor down through forced air cooling or use a resistor equipped with a thermal switch. For the load characteristics of the braking resistor, consult with the manufacturer.

Set the heat dissipation coefficient based on the heat dissipation condition of the external braking resistor.

☆ Related parameters:

Parameter	Comm. address	Function	Setpoint	Default value	Unit	Change mode
H02.24	2002-19h	Resistor heat dissipation coefficient	10 to 100	30	%	Real time

Note

Higher resistor heat dissipation coefficient indicates higher braking efficiency.

- **External load torque applied, motor in generating state**
  When rotation directions of the motor and shaft are the same, the motor is in the motoring state. In some special applications where the motor torque direction is opposite to the rotating direction, the motor is in generating state, and pumps the electric energy back to the servo drive.

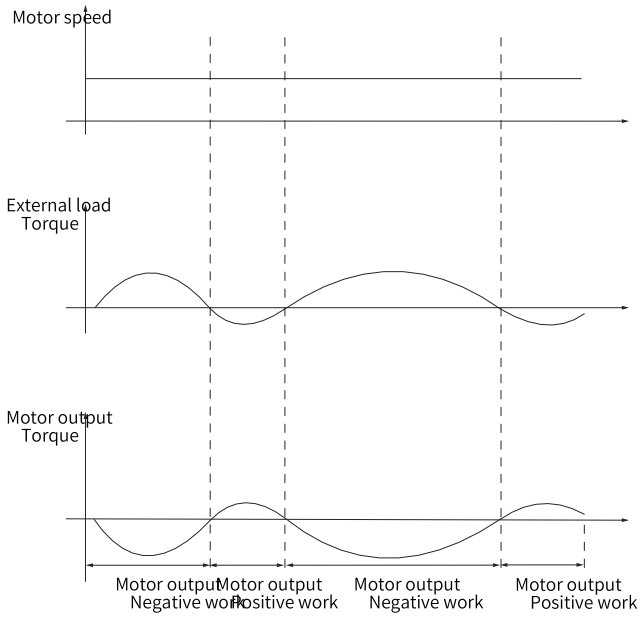


Figure 6-9 Example of the curve with external load torque

Take H1 series 750 W models (rated torque: 2.39 N·m) as an example. When the external load torque is 60% of the rated torque and the motor speed reaches 1500 RPM, the power fed back to the drive is (60% × 2.39) × (1500 × 2π/60) = 225 W. Because the braking resistor needs to be derated by 70%, the power of the external braking resistor is 225 ÷ (1 - 70%) = 750 W, with resistance being 50 Ω.

Braking resistor selection for direct drive

- **Without external load torque**

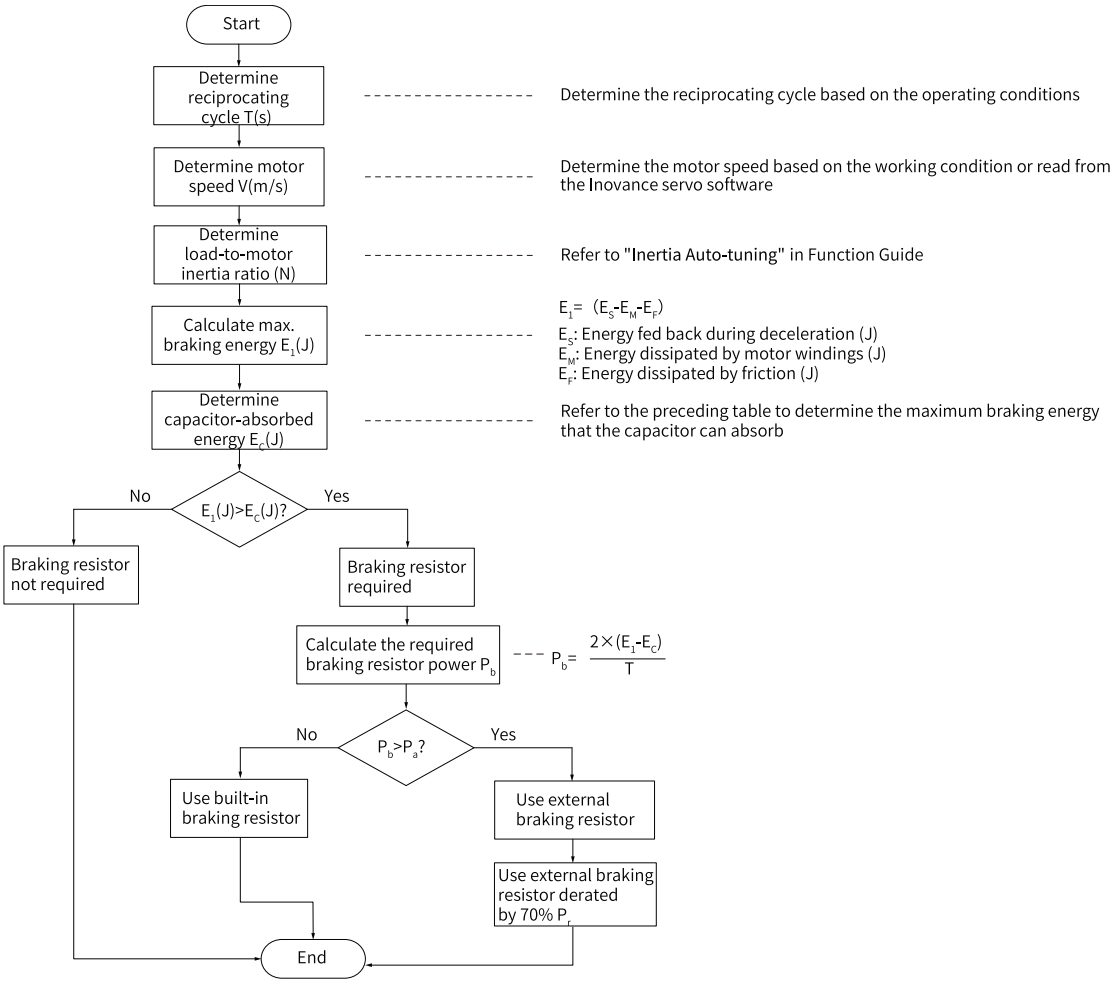


Figure 6-10 Flowchart for selecting the braking resistor

Note

- Determine whether to use a braking resistor, select a built-in or external braking resistor as needed, and then set H02.25.
- It is recommended to use a resistor enclosed by an aluminum case.

■ **Calculate the energy returned at each deceleration**

$$E_S = \frac{1}{2} \times (M_M + M_L) \times (V_1^2 - V_2^2)$$

E_S : Feedback energy upon deceleration (J)

M_M : Rotor weight (kg)

M_L : Load Weight (kg)

V_1 : Speed before deceleration (m/s)

V_2 : Speed after deceleration (m/s)

■ **Determine the energy consumed by the motor**

$$E_M = 3 \times I_M^2 \times (R_M/2) \times t_d$$

E_M : Energy consumed by motor winding (J)

I_M : Current at deceleration (A)

R_M: Motor phase resistance (Ω)

t_d: Deceleration time (s)

- **Determine the energy consumed by friction (direct drive motor friction loss is low, which can be ignored based on actual operating conditions)**

$$E_F = \frac{1}{2} \times T_f \times (V_1 - V_2) \times t_d$$

E_F: Energy consumed by friction (J)

T_f: Friction resistance (N)

V_1: Speed before deceleration (m/s)

V_2: Speed after deceleration (m/s)

t_d: Deceleration time (s)

- **Determine the energy consumed by the drive**

$$E_1 = E_F - E_M - E_F$$

E_1: Energy consumed by the drive (J)

- **Determine the energy consumed by the braking resistor**
  - $E_1 > E_C$: An external braking resistor is required
  - $E_1 < E_C$: no braking resistor is required

- **Calculate the power of the braking resistor**

$$P_b = 2 \times (E_1 - E_C) / T$$
$$P_r = P_b / 0.3$$

P_b: Power needs to be processed by the braking resistor (W)

P_r: Recommended power for the braking resistor (W)

T: Repeated motor running cycle (s)

0.3: Resistor heat dissipation coefficient (set in H02.24)

- Take the S5R5 model as an example:
  Assume the following operating conditions: reciprocating cycle T = 2s, maximum running speed is 8 m/s, and a deceleration time of 0.05 s for acceleration to zero speed. The load weight is three times the motor rotor weight and the friction torque is 2.5 N·m. In the motor parameter settings, the motor rotor weight is 0.6 kg, the motor phase resistance is 1.53 Ω, and the force constant is 23.5 N/A. In this case:

  The deceleration current can be obtained through H0b.24 (Active value of phase current) when the drive monitors deceleration:

  $I_M = 15$ (A)

  Energy calculation:

$$E_S = \frac{1}{2} \times (1+3) \times 0.6 \times 8^2 = 76.8\ (J)$$
$$E_M = 3/15^2/\frac{1.53}{2} \times 0.05 = 25.82\ (J)$$
$$E_F = \frac{1}{2} \times 2.5 \times 8 \times 0.05 = 0.5\ (J)$$
$$E_1 = E_S - E_M - E_F = 50.48\ (J)$$

  Because $E_1 > E_C$, a braking resistor is required. The power of the braking resistor is as follows:

$$P_b=2 \times (50.48 - 32.42) /2=18.06 (W)$$

Because $P_b < P_a$ (Processing capacity of the built-in braking resistor), the built-in braking resistor is applicable.

- **External load torque applied, motor in generating state**

  When rotation directions of the motor and shaft are the same, the motor is in the motoring state. In some special applications where the motor torque direction is opposite to the rotating direction, the motor is in generating state, and pumps the electric energy back to the servo drive.

  When the load is in the continuous generating state continuously, it is recommended to use the common DC bus mode.

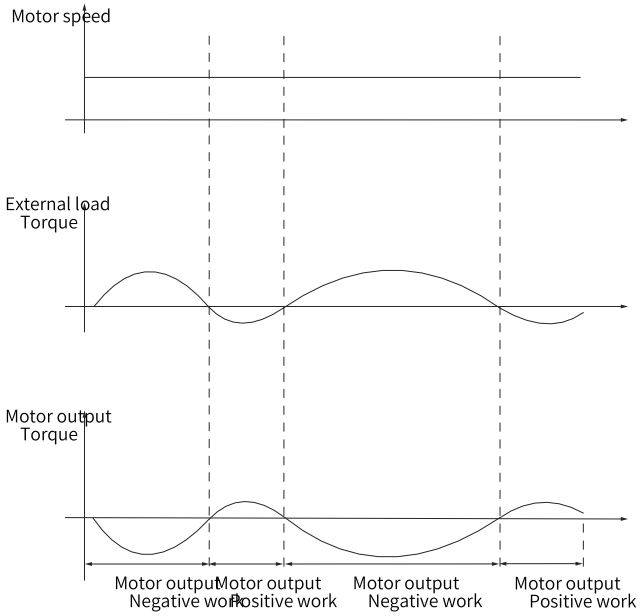


Figure 6-11 Example of the curve with external load torque

7 Certifications, Directives, and Standards

Table 7–1 Compliance list

Certification	Directive		Standard
CE certification	EMC directive	2014/30/EU	EN IEC 61800-3
	LVD directive	2014/35/EU	EN 61800-5-1 EN 60034-1 EN 60034-5
	RoHS directive	2011/65/EU 2015/863/EU	-
Functional safety certification	Machinery directive	2006/42/EC	EN ISO 13849-1 EN 61800-5-2 EN IEC 62061
	-		EN-AR-N 61508
UL/cUL certification	-		UL61800-5-1 CSA C22.2 No.274 UL 1004-1 UL 1004-6 CSA C22.2 No.100

Note

The product certifications comply with the directives and standards specified in the preceding table.

8 Service and Support

Should you encounter a safety accident during the use or operation of the product, or face challenges in operating and maintaining the equipment, which remain unresolved after the relevant documentation is consulted, we provide multiple channels to ensure prompt resolution:

- Channel #1: Contact service@inovance.com.
- Channel #2: Visit https://www.inovance.com/global to access document downloads, after-sales support, spare parts ordering, repair applications, and authenticity verification services.
- Channel #3: Download My Inovance app (https://zshc-eu.inovance.com/download-pc/) where you can access products info and documentation, and query product parameters.

We are committed to providing you with quick and professional technical support, and we look forward to your satisfaction and trust.

Copyright © Shenzhen Inovance Technology Co., Ltd.

PS00021342A00

Shenzhen Inovance Technology Co., Ltd.

www.inovance.com

Add.: Inovance Headquarters Tower, High-tech Industrial Park,
Guanlan Street, Longhua New District,
Shenzhen 518000, P.R. China

Tel: (0755) 2979 9595 Fax: (0755) 2961 9897

Suzhou Inovance Technology Co., Ltd.

www.inovance.com

Add.: No. 52, Tian E Dang Road, Wuzhong District, 215104,
Suzhou City, Jiangsu Province, P.R. China

Tel: (0512) 6637 6666 Fax: (0512) 6285 6720