19120532 A03

This guide is subject to change without notice.
Copyright © Shenzhen Inovance Technology Co., Ltd.

Shenzhen Inovance Technology Co., Ltd.
www.inovance.com

Add.: Inovance Headquarters Tower, High-tech Industrial Park,
Guanlan Street, Longhua New District,
Shenzhen 518000, P.R. China
Tel: (0755) 2979 9595 Fax: (0755) 2961 9897

Suzhou Inovance Technology Co., Ltd.
www.inovance.com

Add.: No. 52, Tian E Dang Road, Wuzhong District, 215104,
Suzhou City, Jiangsu Province, P.R. China
Tel: (0512) 6637 6666 Fax: (0512) 6285 6720

INOVANCE

FORWARD, ALWAYS PROGRESSING

Energy Storage Industry Solution

from Inovance

Industrial Automation | New Energy Vehicle | Intelligent Elevator | Intelligent Robot | Digital Energy | Rail Transit

www.inovance.com

Digital and Intelligent Integration of Generation, Grid, Load, and Storage Promoting Low-Carbon Industrial Transformation

As a leading enterprise in the field of industrial automation control in China and a listed company (stock code: SZ.300124), Inovance has been listed into the "First Batch of Key R&D Projects in Intelligent Robot in China". It has been selected as the "New Energy Vehicle Powertrain Engineering Center in Jiangsu", "National Enterprise Technology Center" in 2021, and "First Batch of Postdoctoral Workstation in Shenzhen". Additionally, Inovance has been recognized in the "2022 Forbes China Top 50 Sustainable Development Industrial Enterprises" and "2022 Hurun China 100".

With a track record of providing energy storage solutions exceeding 35 GW+, Inovance caters to 12 kW to 12500 kW energy storage needs for stations, business, industry, and home. Leveraging expertise in power electronics, control technology, and digital energy management, Inovance offers a comprehensive energy solution spanning power generation, transmission, distribution, and utilization. Our offerings include the large-capacity power conversion systems (PCSs), grid-forming energy storage technology, PMS rapid co-control solutions, flywheel and liquid flow energy storage solutions, formation power solutions, DC distribution solutions, and hydrogen production power solutions.

Relying on robust power electronics, automation, and digital control technologies, Inovance has made breakthroughs in high-speed drive technologies, high-pressure compressor drive technologies, PCSs, and energy management control systems. Our products span from power electronic equipment to control equipment, providing comprehensive industry solutions.

Contents

SYSTEM SOLUTION

1725 kW Centralized PCS 7
3.45 MW Centralized Turnkey Station With Transformer Integrated 9
2.5 MW Centralized PCS 11
5 MW Centralized Turnkey Station With Transformer Integrated 13
10 MW Centralized Turnkey Station With Transformer Integrated 15
400 kW String PCS 17
6 MW String Turnkey Station With Transformer Integrated 19
12.5 MW String Turnkey Station With Transformer Integrated 21
430 kW String PCS 23
6.88 MW string turnkey station with transformer integrated 25
432 kW String PCS for Integrated ESS 27
Hybrid Inverter 29
ALL Liquid-Cooled C&I Energy Storage System 31
Energy Storage Industry Solution 33

ACHIEVEMENT

Achievement 37

Inovance Practice in the Energy Field



Pitch and yaw control system solutions for over **50,000** wind turbines



Comprehensive solutions for over **80%** of metallurgical enterprises



Solutions for electrochemical and physical energy storage systems totaling over **35 GW+**



Integrated industrial chain solutions for **2,000 GW** photovoltaic projects



Industrial localized electronic control solutions and bottle-neck-breaking technologies for over **50** industries

Over **3.5** million electronic control products for new energy vehicles



End-to-end solutions for **2,000 GWH** lithium battery production lines



Electric solutions for over **15** types of engineering machinery




Over **60%** of shore power and comprehensive digital energy solutions for ports




Overview of System Solution

Power generation

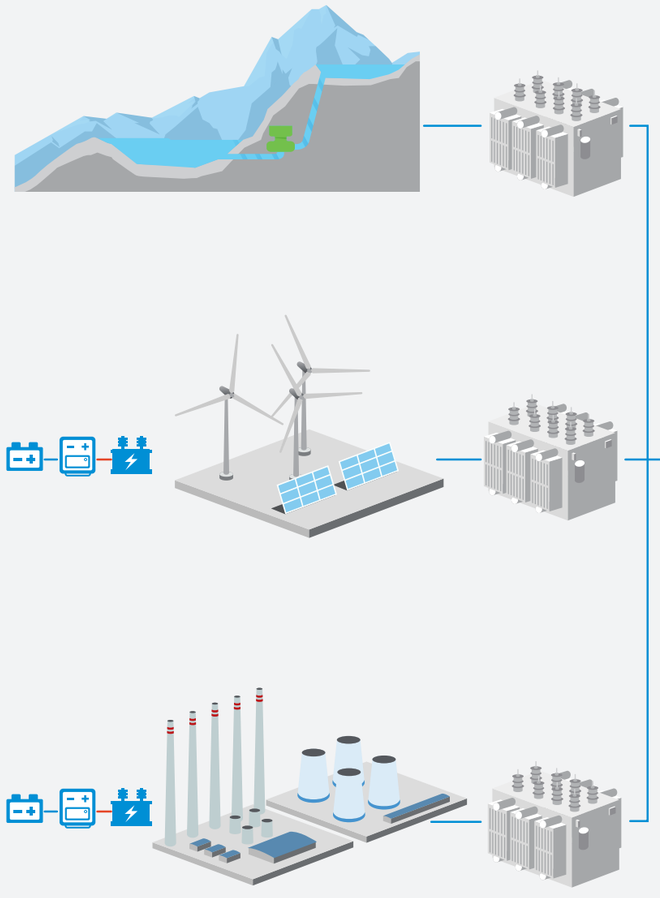


- Frequency modulation
- Facilitating grid connection of wind and solar new energy
- Peak-load regulation
- Smooth output
- Black start

Transmission

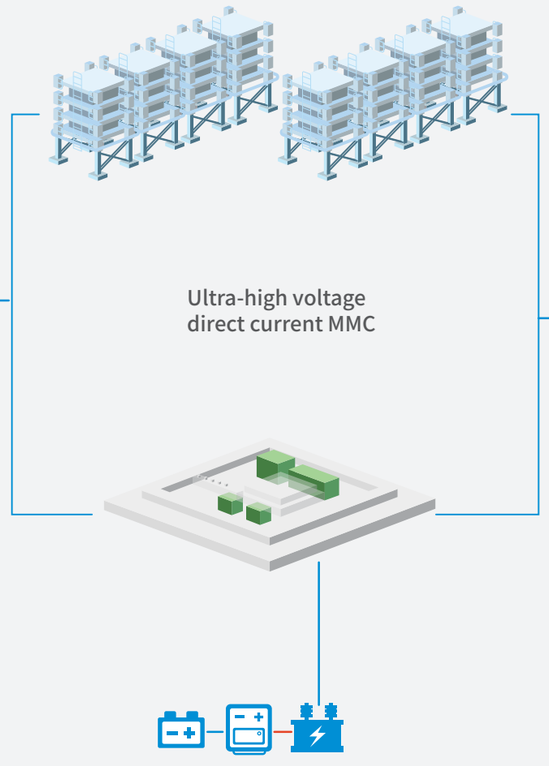

- Alleviating congestion in the AC grid
- Output optimization
- Smooth output


Distribution

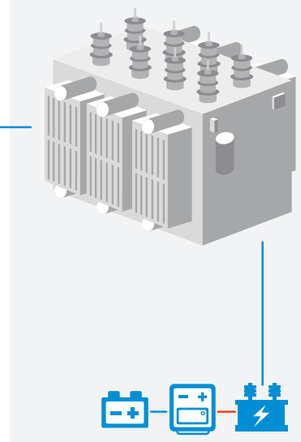

- Quick peak adjustment
- Distribution transformer area expansion
- Load shifting
- Reactive support


Consumption

Industry and business

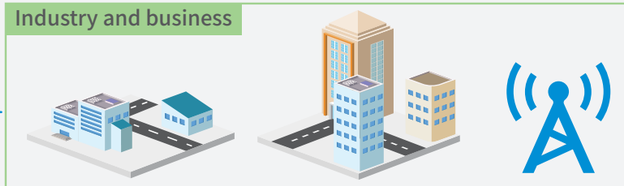


- Zero-carbon park for storage
- Data center
- Communication base station

Great industry

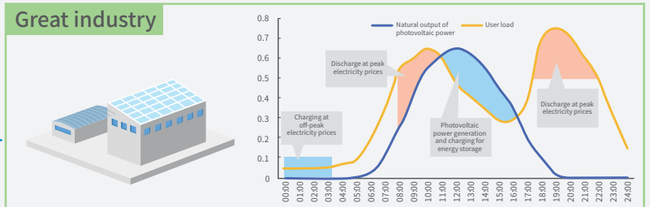


- Rooftop photovoltaics, DC energy storage, and DC consumption
- Peak-to-off-peak price difference

Emergency backup

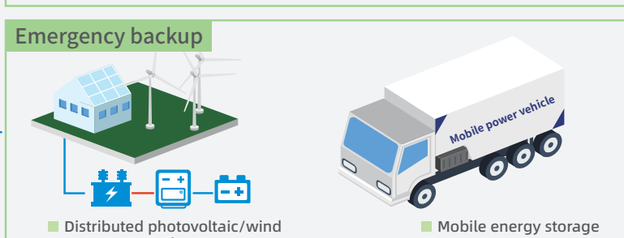


- Distributed photovoltaic/wind power generation
- Mobile energy storage

Domestic use

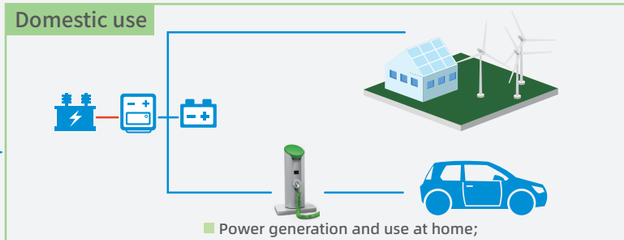

- Power generation and use at home; PV+ESS+Charging for local consumption

Others

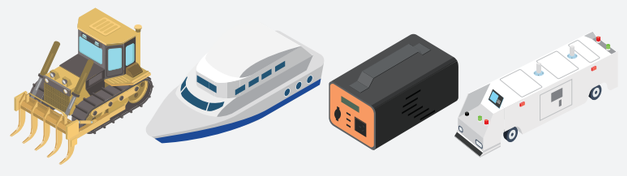

- Engineering machinery, electric boat, portable energy storage, AGV, and others

Overview of Energy Storage

1725 kW Centralized PCS

IES900 Series

Product Features

Intelligent and efficient

- Tri-level topology; maximum efficiency of 99%
- Off-grid V/f output, GFL/GFM VSG, and black start functions
- Quick power response, allowing for full-load charge/discharge switchover within 30 ms

Smartly interconnected


- Establishes communication link fast with diverse options
- Integrates RS485, Ethernet, and CAN communication ports
- Supports Modbus-RTU, Modbus-TCP, CAN 2.0B, IEC 61850 GOOSE, and IEC 61850 MMS protocols

Safe and reliable


- Supports LVRT/HVRT with great grid adaptability
- Active and passive islanding detection
- Comprehensive protection measures and automatic self-diagnosis upon fault

Cost-effective

- Air-water cooling, enabling high power density with a small footprint
- Parallel connection of multiple systems for flexible expansion

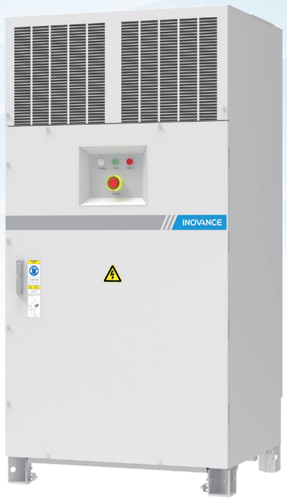

Topology

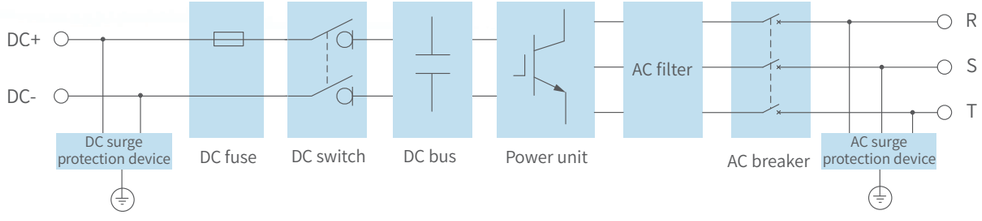

Parameters

Model	IES900-07-1200-C-S-EU	IES900-07-1375-C-S-EU	IES900-07-1575-C-S-EU	IES900-07-1725-C-S-EU
DC side				
Maximum DC voltage	1500 V			
DC voltage range	700 V to 1500 V	800 V to 1500 V	915 V to 1500 V	1000 V to 1500 V
Maximum DC current	1807 A			
Number of DC input channels	1			
AC side (grid-connected)				
Rated output power	1200 kW (@45℃)	1375 kW (@45℃)	1575 kW (@45℃)	1725 kW (@45℃)
Maximum output power	1320 kW (@35℃)	1512 kW (@35℃)	1732 kW (@35℃)	1898 kW (@35℃)
Rated grid voltage	480 V	550 V	630 V	690 V
Rated grid frequency	50 Hz/60 Hz *			
Total harmonic distortion of the current (THD)	< 3% (rated power)			
Reactive power range	-1.05 (lead) to +1.05 (lag)			
Power factor	-1 (lead) to +1 (lag)			
AC connection method	Three-phase three-wire			
AC side (off-grid)				
Rated output voltage	480 V	550 V	630 V	690 V
Rated frequency	50 Hz/60 Hz *			
Voltage variation	< 1% U_N (linear load)			
Total harmonic distortion of the voltage	< 3% (linear load)			
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)			
System				
Maximum efficiency	99%			
Cooling method	Air-water cooling			
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +45℃)			
Allowable relative humidity	0% to 100% (non-condensing)			
Cable inlet mode	Front-bottom-in for the DC cable; rear-bottom-out for the AC cable			
Dimensions (W x D x H)	1080 mm x 870 mm x 2175 mm			
Mass	< 1200 kg			
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)			
Ingress protection	IP65			
Compliance	EN5049-2/10, G99, EN 62477-1, EN IEC 61000-6-2/4, and EN 55011			
Communication				
Communication interface	RS485, CAN, Ethernet, and CAN 2.0B			
Communication protocol	Modbus-RTU and CAN 2.0B Modbus-TCP, IEC 61850, and EtherCAT (optional)			

* Customized based on requirements.

3.45 MW Centralized Turnkey Station With Transformer Integrated

IPS900 Series

Product Features

Intelligent and efficient

- Tri-level topology for the PCS; maximum conversion efficiency of 99%
- Quick power response, allowing for ±100% charge/discharge switchover within 30 ms
- High-speed communication for parallel PCS operation, effectively reducing circulating current

Flexible and compatible

- Streamlined system that supports various wire gauge changes
- Supports multiple charge/discharge modes: constant voltage, constant current, and constant power
- Supports Modbus-RTU, Modbus-TCP, CAN 2.0B, IEC 61850 GOOSE, and IEC 61850 MMS protocols

Safe and reliable


- IP54 for the whole device and IP65 for the PCS
- Fault recording for rapid fault localization
- Reliable operation in the wide range of -40℃ to +60℃

Cost-effective

- Integrated in a 20-foot standard container, enabling efficient transportation
- Low loss due to air-water cooling for the PCS



Topology

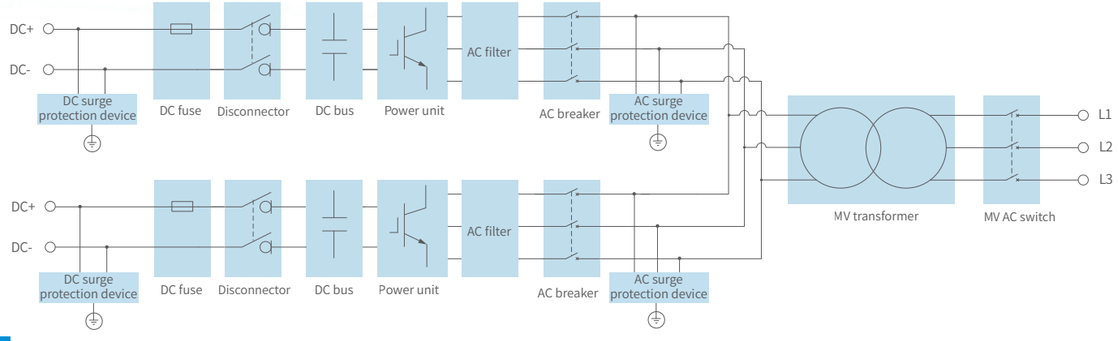

Parameters

Model	IPS900-07P-3450-U-EU
DC side	
Maximum DC voltage	1500 V
DC voltage for full performance	1050 V to 1500 V
Maximum DC current	1807 A x 2
Number of DC input channels	2
AC side (grid-connected)	
Rated power	3450 kVA
Rated grid voltage	20 kV to 35 kV
Rated grid frequency	50 Hz / 60 Hz *
Total harmonic distortion of the current (THD)	< 3% (rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated output frequency	50 Hz / 60 Hz *
Voltage variation	< 2% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Cooling method	Natural air cooling (transformer)/Air-water cooling (PCS)
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +45℃)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and bottom-out
Dimensions (W x D x H)	6058 mm x 2438 mm x 2896 mm (oil-immersed transformer)
Mass	15,000 kg
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)
Ingress protection	IP54 (whole device)/IP65 (PCS)
Communication	
Communication interface	With EMS: MMS dual network and GOOSE dual network With BMS: RS485 / CAN
Communication protocol	IEC 61850, Modbus-RTU, Modbus-TCP, EtherCAT, and CAN 2.0B

* Customized based on requirements.

2.5 MW Centralized PCS

IES920 Series

Product Features

Intelligent and efficient

- Tri-level topology; maximum efficiency of 99%
- Off-grid V/f output, GFL/GFM VSG, and black start functions
- Quick power response, allowing for full-load charge/discharge switchover within 30 ms

Flexible and compatible

- Supports multiple charge/discharge modes: constant voltage, constant current, and constant power
- Supports Modbus-RTU, CAN 2.0B, Modbus-TCP, IEC 61850, and EtherCAT protocols

Safe and reliable


- Top-rear exhaust, reducing heat island effect and duct blockage risks
- Third-generation enclosed air-water cooling design, offering exceptional environmental adaptability
- Dual protection with pressure relief and ventilation devices

Cost-effective

- 30% increase in power density, improving site connection ratio
- Parallel connection of multiple systems for flexible expansion



Topology

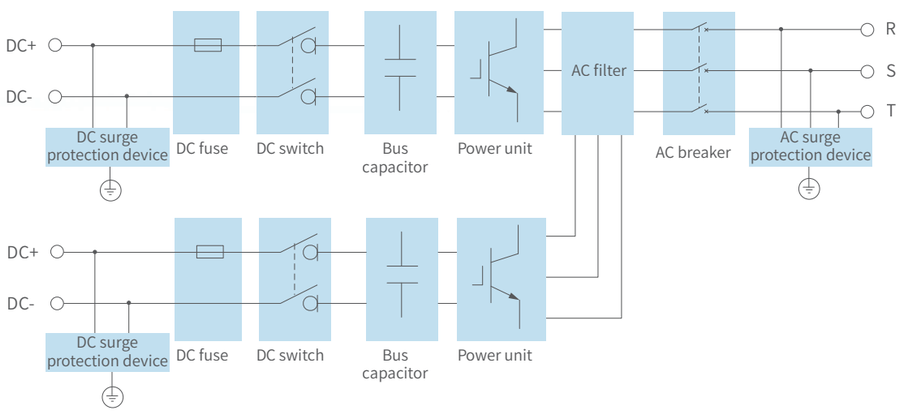

Parameters

Model	IES920-07-2500-C-D-EU
DC side	
Maximum DC voltage	1500 V
Operating DC voltage range	1000 V to 1500 V
Maximum DC current	1403 A x 2
Number of DC input channels	2
AC side (grid-connected)	
Rated power	2500 kW (@50℃)
Maximum output power	2750 kW (@40℃)
Rated grid voltage	690 V
Rated grid frequency	50 Hz / 60 Hz *
Total harmonic distortion of the current (THD)	< 3% (rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated AC voltage	690 V
Rated output frequency	50 Hz / 60 Hz *
Voltage variation	< 1% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Maximum efficiency	Charging efficiency (Europe) : 98.10% Discharge efficiency (Europe): 97.97%
Cooling method	Air-water cooling
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +50℃)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in for the DC cable; rear-out for the AC cable
Dimensions (W x D x H)	1200 mm x 1250 mm x 2370 mm
Mass	< 2000 kg
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)
Ingress protection	IP65
Compliance	EN5049-2/10, G99, CEA:2022, VDE-AR-N 4110/4120, EN 62477-1, EN IEC 61000-6-2/4, and EN 55011
Communication	
Communication interface	RS485, CAN, Ethernet, and DI/DO
Communication protocol	Standard: Modbus-RTU / CAN 2.0B Optional: Modbus-TCP, IEC 61850, and EtherCAT

* Customized based on requirements.

5 MW Centralized Turnkey Station With Transformer Integrated

IPS920 Series

Product Features

Intelligent and efficient


- Tri-level topology for the PCS; maximum conversion efficiency of 99%
- High-speed communication for parallel PCS operation, effectively reducing circulating current
- Suitable for various grid environments with strong connectivity to complex grids

Cost-effective


- Integrated in a 20-foot standard container, enabling efficient transportation
- Reduced internal redundant components; low noise

Safe and reliable

- 50% improved cooling efficiency, immune to heat island effect
- Third-generation enclosed air-water cooling design, offering exceptional environmental adaptability

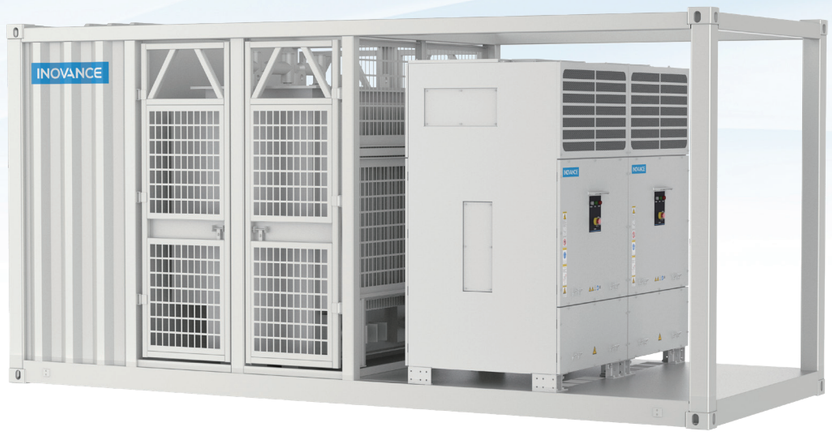

Topology

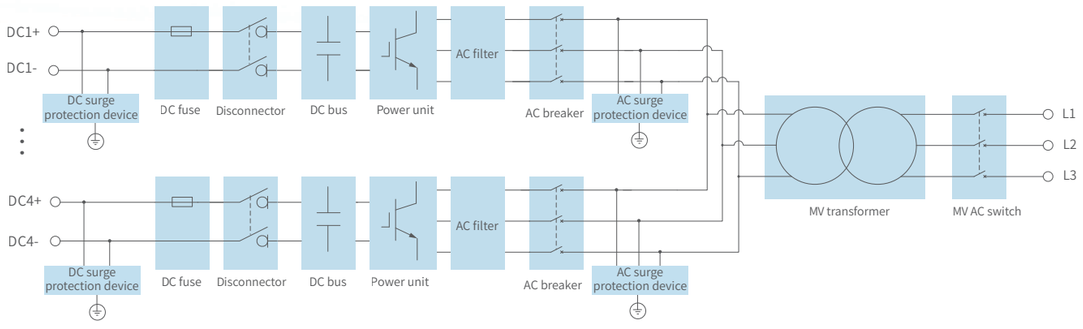

Parameters

Model	IPS920-07P-5000-U-EU
DC side	
Maximum DC voltage	1500 V
DC voltage for full performance	1050 V to 1500 V
Maximum DC current	1403 A x 4
Number of DC input channels	4
AC side (grid-connected)	
Rated power	5000 kVA
Rated grid voltage	20 kV to 35 kV
Rated grid frequency	50 Hz /60 Hz *
Total harmonic distortion of the current (THD)	< 3% (rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated output frequency	50 Hz /60 Hz *
Voltage variation	< 2% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Cooling method	Natural air cooling (transformer)/Air-water cooling (PCS)
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +45℃)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and bottom-out
Dimensions (W x D x H)	6058 mm x 2438 mm x 2896 mm (oil-immersed transformer)
Mass	< 30,000 kg
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)
Ingress protection	IP54 (whole device)/IP65 (PCS)
Communication	
Communication interface	With EMS: MMS dual network and GOOSE dual network With BMS: RS485 / CAN
Communication protocol	IEC 61850, Modbus-RTU, Modbus-TCP, EtherCAT, and CAN 2.0B

* Customized based on requirements.

10 MW Centralized Turnkey Station With Transformer Integrated

IPS920 Series

Product Features

Intelligent and efficient


- Tri-level topology for the PCS; maximum conversion efficiency of 99%
- High-speed communication for parallel PCS operation, effectively reducing circulating current
- Suitable for various grid environments with strong connectivity to complex grids

Cost-effective


- Integrated in a 40-foot standard container, enabling efficient transportation
- Reduced internal redundant components; low noise

Safe and reliable

- 50% improved cooling efficiency, immune to heat island effect
- Third-generation enclosed air-water cooling design, offering exceptional environmental adaptability

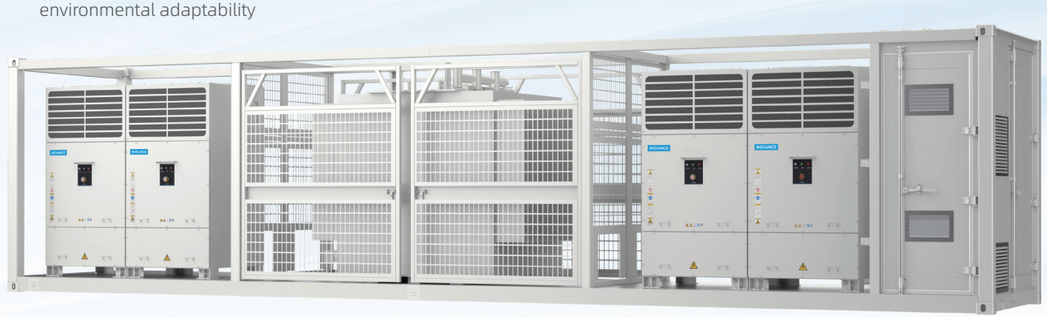

Topology

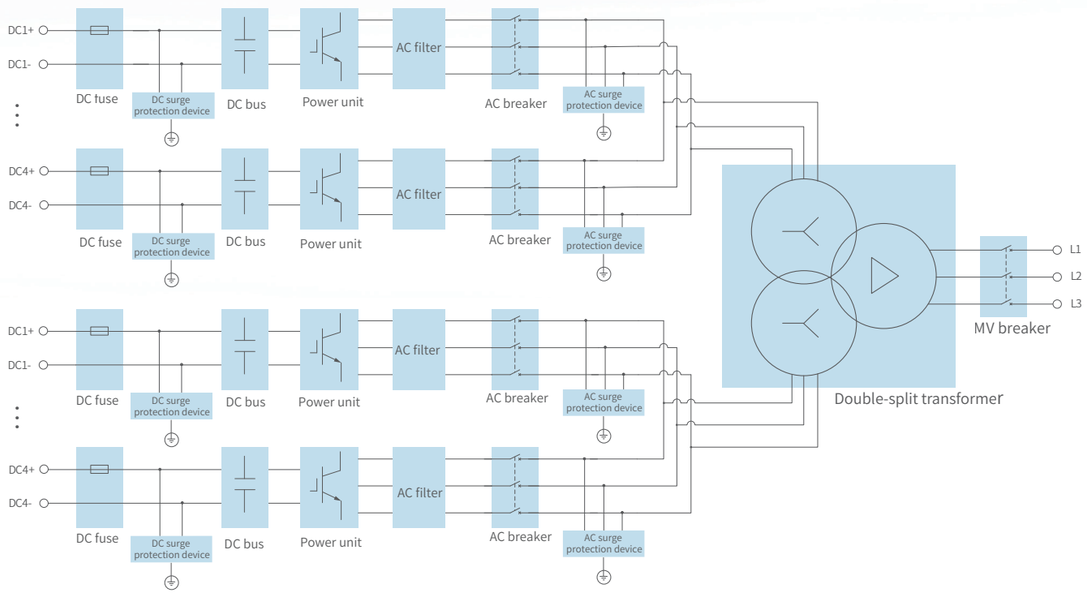

Parameters

Model	IPS920-07P-10000-U-EU
DC side	
Maximum DC voltage	1500 V
DC voltage range	1000 V to 1500 V
Maximum DC current	1403 A x 8
Number of DC input channels	8
AC side (grid-connected)	
Rated power	10000 kVA
Rated grid voltage	20 kV to 35 kV
Rated grid frequency	50 Hz /60 Hz *
Total harmonic distortion of the current (THD)	< 3% (rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated output frequency	50 Hz /60 Hz *
Voltage variation	< 1% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Cooling method	Natural air cooling ON (transformer)/Air-water cooling (PCS)
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +45℃)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and bottom-out
Dimensions (W x D x H)	12192 mm x 2438 mm x 2896 mm (oil-immersed transformer)
Mass	< 42,000 kg
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)
Ingress protection	IP54 (whole device)/IP65 (PCS)
Communication	
Communication interface	Ethernet, RS485, CAN, and DI/DO
Communication protocol	Standard: Modbus-RTU / CAN2.0B Optional: Modbus-TCP, IEC61850, and EtherCAT

* Customized based on requirements.

400 kW String PCS

IES600 Series

Product Features

Efficient and flexible

- Integrated design compatible with AC/DC configurations and various battery types
- Independent control for each battery cluster to prevent inter-cluster circulation, enhancing system energy capacity

Convenient Maintenance


- 225 mm ultra-thin design, easily fitting into a 20-foot container, enabling efficient transportation
- Liquid cooling for each module, enabling easy and quick maintenance
- One-click upgrade for the entire system with visualized operating status

Safe and reliable

- High-speed EtherCAT communication, supporting 16 parallel machines
- High protection rating (IP65) for reliable performance in extreme environments
- Single-module switchover upon fault, minimizing system capacity loss



Topology

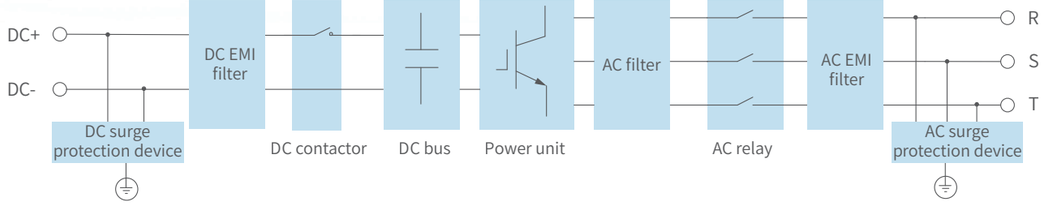

Parameters

Model	IES600-07-0400-C-EU
DC side	
Maximum DC voltage	1500 V
Operating DC voltage range	1000 V to 1500 V
Maximum DC current	381.5 A
Number of DC input channels	1
AC side (grid-connected)	
Rated power	400 kW (@50℃)
Maximum output power	440 kW (@40℃)
Rated grid voltage	690 V
Rated grid frequency	50 Hz / 60 Hz*
Total harmonic distortion of the current (THD)	< 3% (rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated AC voltage	690 V
Rated output frequency	50 Hz / 60 Hz*
Voltage variation	< 1% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Maximum conversion efficiency	99%
Cooling method	Air-water cooling
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +50℃)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and bottom-out
Dimensions (W x D x H)	225 mm x 1015 mm x 1515 mm
Mass	< 300 kg
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)
Ingress protection	IP65
Compliance	EN5049-2/10, VDE-AR-N 4110/4120, C10/11:2025, EN 62477-1, EN IEC 61000-6-2/4, and EN 55011
Communication	
Communication interface	RS485, CAN, Ethernet, and DI/DO
Communication protocol	IEC 61850, Modbus-RTU, EtherCAT, and CAN 2.0B

* Customized based on requirements.

6 MW String Turnkey Station With Transformer Integrated

IPS600 Series

Product Features

Intelligent and efficient

- PCS plug-and-play functionality, enabling online maintenance
- Independent thermal management per module with thermosiphon and internal circulation technologies for cooling
- PCS maximum conversion efficiency of 99%; transformer peak conversion efficiency of up to 99.57%

Cost-effective


- Modular design for flexible configuration per customer needs
- Integrated in a 20-foot standard container, enabling efficient transportation
- Customized solution for 6 MW multi-unit parallel operation

Safe and reliable

- Active balancing BMS and individual pack charge/discharge to avoid capacity loss and circulating current risks
- 16-unit parallel circulating current being less than 5% of average parallel current
- IP54 for the whole device; IP65 for the PCS



Topology

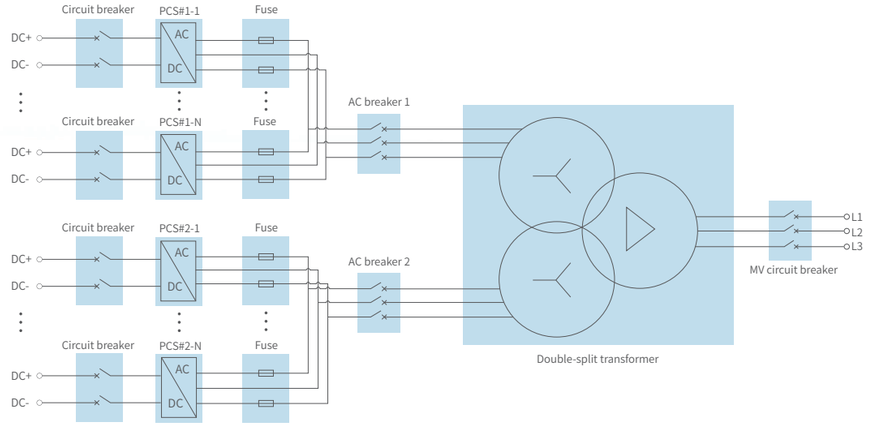

Parameters

Model	IPS600-07P-6000-U-EU
DC side	
Maximum DC voltage	1500 V
DC voltage for full performance	1070 V to 1500 V
Maximum DC current	358 A x 16
Number of battery clusters	16
AC side (grid-connected)	
Rated power	6000 kVA (including the capacity of battery compartment and auxiliary transformer)
Rated grid voltage	20 kV to 35 kV
Rated grid frequency	50 Hz / 60 Hz *
Total harmonic distortion of the current (THD)	< 3% (rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated output frequency	50 Hz / 60 Hz *
Voltage variation	< 1% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Cooling method	Naturally ventilated (transformer)/Intelligent air cooling (PCS)
Allowable ambient temperature	-40°C to +60°C (derating required for temperatures above +50°C)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and bottom-out
Dimensions (W x D x H)	6058 mm x 2438 mm x 2896 mm (oil-immersed transformer)
Mass	Approx. 30,000 kg
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)
Ingress protection	IP54 (whole device)/IP65 (PCS)
Communication	
Communication interface	RS485, CAN, Ethernet, and CAN 2.0B
Communication protocol	Standard: Modbus-RTU / CAN 2.0B Optional: Modbus-TCP, IEC 61850, and EtherCAT

* Customized based on requirements.

12.5 MW String Turnkey Station With Transformer Integrated

IPS600 Series

Product Features

Intelligent and efficient


- PCS plug-and-play functionality, enabling online maintenance
- Independent thermal management per module with thermosiphon and internal circulation technologies for cooling
- PCS maximum conversion efficiency of 99%; transformer peak conversion efficiency of up to 99.57%

Cost-effective


- Modular design for flexible configuration per customer needs
- Integrated in a 40-foot standard container, enabling efficient transportation
- Customized solution for 12.5 MW multi-unit parallel operation

Safe and reliable

- Active balancing BMS and individual pack charge/discharge to avoid capacity loss and circulating current risks
- 32-unit parallel circulating current being less than 5% of average parallel current
- IP54 for the whole device; IP65 for the PCS

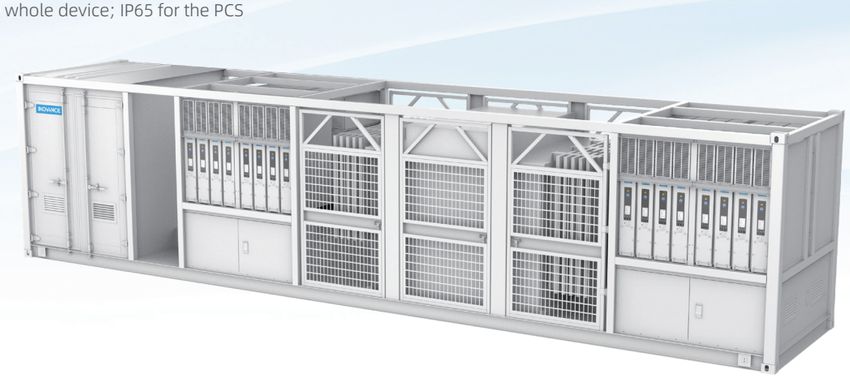

Topology

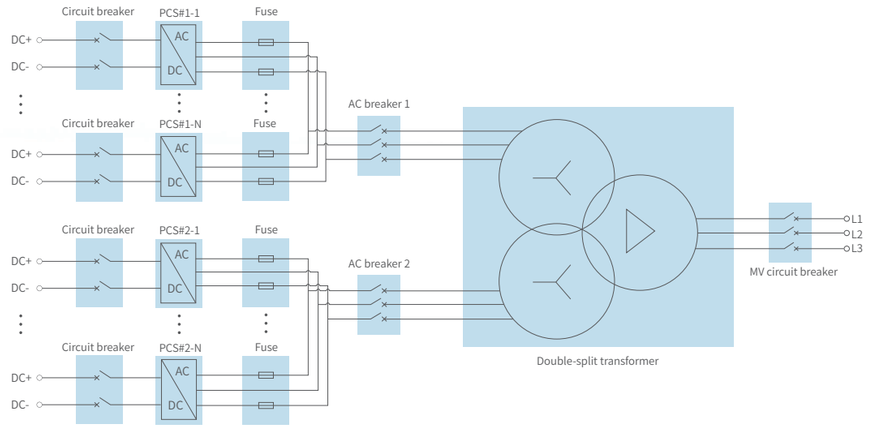

Parameters

Model	IPS600-07P-12500-U-EU
DC side	
Maximum DC voltage	1500 V
DC voltage for full performance	1070 V to 1500 V
Maximum DC current	381.5 A x 32
Number of battery clusters	32
AC side (grid-connected)	
Rated power	12500 kVA (including the capacity of battery compartment and auxiliary transformer)
Rated grid voltage	20 kV to 35 kV
Rated grid frequency	50 Hz / 60 Hz *
Total harmonic distortion of the current (THD)	< 3% (rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated output frequency	50 Hz / 60 Hz *
Voltage variation	< 1% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Cooling method	Naturally ventilated (transformer)/Intelligent air cooling (PCS)
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +50℃)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and bottom-out
Dimensions (W x D x H)	12192 mm x 2438 mm x 2896 mm (oil-immersed transformer)
Mass	Approx. 50,000 kg
Maximum operating altitude	3000 m (derating required for altitudes above 2000 m)
Ingress protection	IP54 (whole device)/IP65 (PCS)
Communication	
Communication interface	RS485, CAN, Ethernet, and CAN 2.0B
Communication protocol	Standard: Modbus-RTU / CAN 2.0B Optional: Modbus-TCP, IEC 61850, and EtherCAT

* Customized based on requirements.

430 kW String PCS

IES620 Series

Product Features

Flexible configuration

- Aviation connector for plug-and-play operation and fast maintenance
- Single/Dual DC input, supporting phased configuration and flexible expansion

Environmental robustness

- Liquid cooling, ensuring operation across a wide tem perature range; no derating even at 50° C
- IP65-rated protection and C4L corrosion protection
- Operating range from -40° C to +60° C

Safe and reliable


- Per-cluster fine management, ensuring maximum conversion efficiency of 99% and full-load efficiency of 98.3%
- Fault recording and waveform analysis for quick fault location
- Comprehensive protection measures to ensure reliable system operation

Smart and user-friendly

- Compatible with 280 Ah, 314 Ah, and even larger cells in single-PCS operation
- Support for parallel AC/DC operation of multiple PCSs, meeting requirements of 0.25C, 0.5C, and 1C application scenarios
- Support for Modbus RTU, CAN 2.0B, EtherCAT, and Modbus TCP



Topology

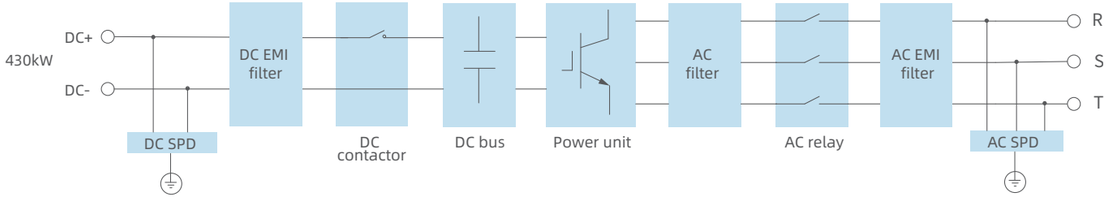

Parameters

Model	IES620-07-430-W-D-EU
DC side	
Maximum DC voltage	1500 V
Operating DC voltage range	1000 V to 1500 V
Maximum DC current	201 A x 2
Number of DC input channels	2
AC side (grid-connected)	
Rated Power	430 kW (@50℃)
Maximum Output Power	473 kW (@45℃)
Rated grid voltage	690 V
Rated grid frequency	50 Hz
Total harmonic distortion of the current (THD)	< 3% (Rated power)
Reactive power range	-1.05 (lead) to +1.05 (lag)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated AC voltage	690 V
Rated output frequency	50 Hz
Voltage variation	< 1% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Maximum efficiency	99%
Cooling method	Water cooling
Allowable ambient temperature	-40° C to +60° C (derating required for temperatures above +50° C)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and top-out
Dimensions (W x D x H)	235 mm x 955 mm x 1050 mm
Mass	< 200 kg
Maximum operating altitude	3000 m
Ingress protection	IP65
Display and communication	
Communication interface	RS485, CAN, Ethernet, and DI/DO
Communication protocol	Modbus RTU, CAN 2.0B, EtherCAT, and Modbus TCP

6.88 MW String Turnkey Station With Transformer Integrated

IPS620 Series

Product Features

Intelligent and efficient

- Tri-level topology for the PCS; maximum efficiency of 99%
- With off-grid V/f output, GFL/GFM VSG, and black start functions
- Quick power response, allowing for 100% charge/ discharge switchover within 30 ms

Smart and flexible


- Compatible with 314Ah cells and 600+ Ah cells
- Supports multiple charging and discharging modes: constant voltage, constant current, and constant power
- Establishes communication link fast with diverse options

Safe and reliable


- IP54 for the whole device and IP65 for the PCS
- Comprehensive protection measures, ensuring reliable running of the system
- Active balancing BMS and individual pack charge/discharge to avoid capacity loss and circulating current risks
- C5M corrosion resistance

Cost-effective

- Higher power density and compact size
- Multi-unit parallel operation with independent management for each battery cluster to extend the lifespan of battery cells

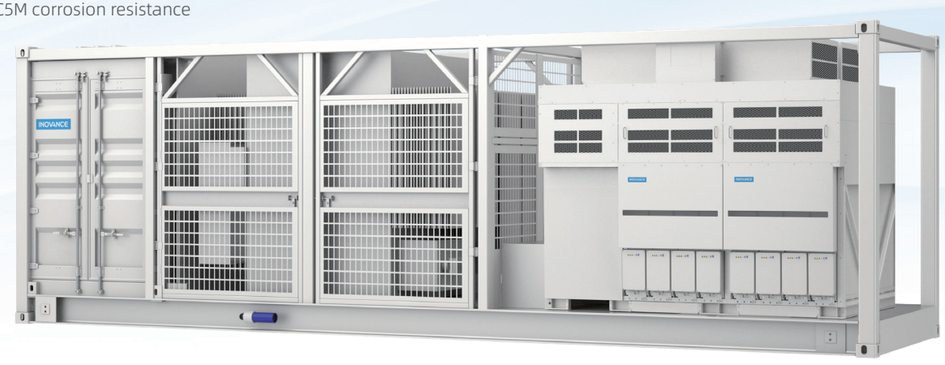

拓扑图

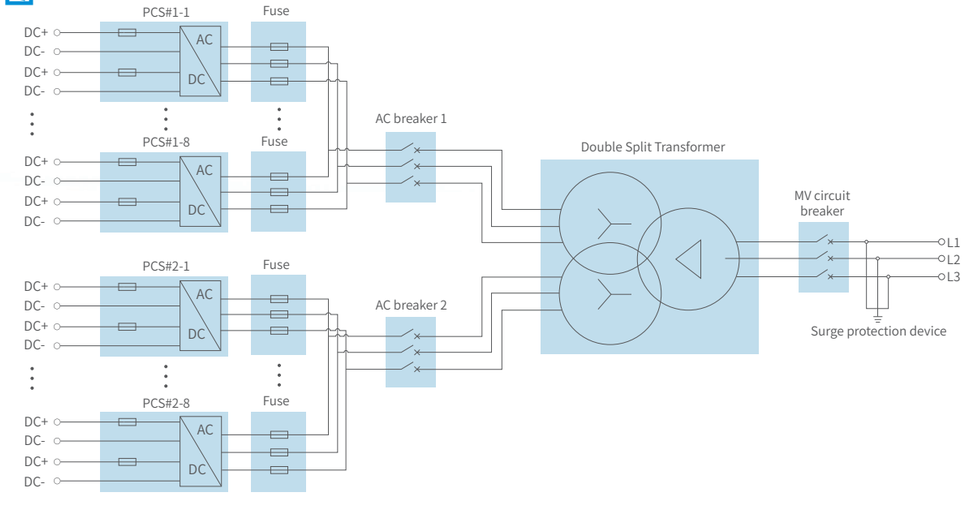

Parameters

Model	IPS620-07P-6880-U-EU
DC side	
Maximum DC voltage	1500 V
Operating DC voltage range	1000 V to 1500 V
Maximum DC current	201 A x 2 x 16
Number of DC input channels	2 x 16
AC side (grid-connected)	
Rated power	6880 kVA
Rated grid voltage	30 kV
Rated grid frequency	50 Hz
Total harmonic distortion of the current (THD)	<3% (rated power)
Power factor	-1 (lead) to +1 (lag)
AC connection method	Three-phase three-wire
AC side (off-grid)	
Rated AC voltage	30 kV
Rated output frequency	50 Hz
Voltage variation	< 1% U_N (linear balanced load)
Total harmonic distortion of the voltage	< 3% (linear load)
Voltage unbalance degree	PCS output voltage unbalance: < 2% or ≤ 4% (short time)
System	
Transformer rated power	7800kVA
Auxiliary power supply	300kVA
Cooling method	Air-cooled (transformer) / Water-cooled (PCS)
Allowable ambient temperature	-40℃ to +60℃ (derating required for temperatures above +40℃)
Allowable relative humidity	0% to 100% (non-condensing)
Cable inlet mode	Bottom-in and bottom-out
Dimensions (W x D x H)	9125 mm x 2438 mm x 2896 mm (oil transformer)
Oil tank capacity	3.9m³
Mass	< 34000 kg
Maximum operating altitude	1000 m (customization required for altitude over 1000 m)
Ingress protection	IP65 (PCS)/IP54 (turnkey station)
Communication	
Communication interface	RS485, CAN, Ethernet, and DI/DO
Communication protocol	Modbus RTU, CAN2.0B, EtherCAT, Modbus TCP, GOOSE, and MMS

432 kW String PCS for Integrated ESS

IES630 Series

Product Features

Flexible and compatible

- Standard unit architecture design and free combination of energy storage systems of 2 hours, 4 hours, or 8 hours
- High-voltage box highly integrated, plug-and-play of party A's BCU, and personalized solution customization
- Extreme size design, compatible with 314 Ah, 587 Ah, and 628 Ah cells

Safe and reliable

- Fault recording, fault analysis, quick locating in 10s, and standard pressure relief valve
- Operation under a wide temperature range of -40° C to +60° C, derating not required at temperature of 50° C
- Dual protection mechanism of 3D pipeline channel avoidance and leakage monitoring

Cost-effective

- Simplified serial design, enabling an online rate of 99% for energy storage systems
- Innovative DC control partition design, facilitating maintenance and reducing the O&M cost by 20%
- Liquid-cooled heat dissipation design and high integration with battery compartment, increasing the power density by 29%


Intelligent and efficient

- Efficient SIC technology, providing the highest PCS efficiency ≥ 99.3%
- PCS and BMS integration and intelligent collaboration control, reducing the fault rate by 25%
- Quick power response and full-load charging conversion < 30 ms




Topology

Single-Path Integration PCS

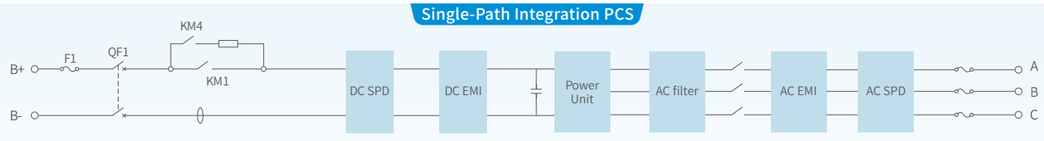

Dual-Path Integration PCS

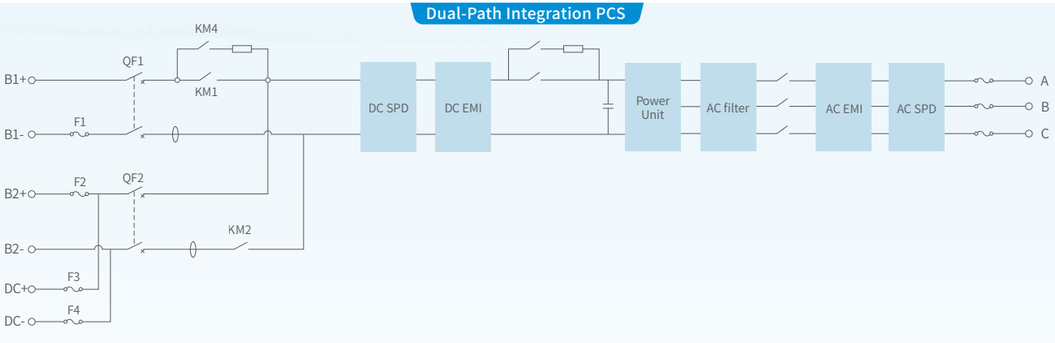

Parameters

Model	IES630-07-0432-W-S-EU-690	IES630-07-0432-W-S-EU-690-F	IES630-07-0432-W-D-EU-690-F
DC side			
Maximum DC power	482.4 kW	482.4 kW	241.2 kW x 2
Maximum current	402 A	402 A	201 A x 2
Maximum bus voltage	1500 V		
Operating voltage range	1000 V to 1500 V		
Full-load voltage range	1100 V to 1500 V		
AC side (grid-connected)			
Rated output power	432 kW		
Maximum output power	475.2 kW		
Rated output current	361.5 A		
Maximum output current	397.6 A		
Reactive power range	-453.6 kVAR to +453.6 kVAR		
AC connection method	Three-phase three-wire		
Isolation method	Non-isolation		
Rated grid voltage	690 V		
Allowable grid voltage	-15% to +10%		
Rated grid frequency	50 Hz / 60Hz *		
AC side (off-grid)			
Rated AC voltage	690 V		
Rated output power	432 kW		
Voltage variation	< 2% U_N (linear balanced load)		
Total voltage harmonic distortion rate	< 3%		
System			
Maximum efficiency	99.3%		
Overload capacity	110% overload for long term (@45° C); 120% for not less than 1 minute		
Allowable ambient temperature	-40° C to +60° C (derating required for temperatures above +50° C)		
Rated operating altitude	5000 m (derating required for altitudes higher than 2000 m)		
Dimensions (W x D x H)	595 mm x 1280 mm x 220 mm (single PCS without handle); 595 mm x 1800 mm x 220 mm (with junction box, without handle)		
Cable inlet	Front-in front-out		
Corrosion-proof class	Standard: C4M; optional: C5		
IP rating	IP65		
Cooling method	Liquid-cooled		
Number of units in parallel	≤ 16		
Installation method	Horizontal or vertical		
Communication			
Communication interface	RS485, CAN, Ethernet, and DIO		
Communication protocol	Modbus RTU, EtherCAT, CAN 2.0, and Modbus TCP		
Certification standard			
Standard	EN 50549-2/10，VDE-AR-N 4110/4120，EN 62477-1，EN IEC 61000-6-2/4 and EN 55011		

* Customized based on requirements.

Hybrid Inverter

IES320 Series

The IES320 series hybrid inverter is used in energy storage for home and small-scale industry and business. The single-unit power is 12 kW, 15 kW, or 20 kW. It supports various modes, such as self-consumption, surplus electricity grid connection, off-grid power supply, and Time of Use (TOU). It allows off-grid connection with all types of loads. The efficient thermosi-phon technology is applied to significantly improve the heat dissipation efficiency. The inverter has IP66 and C5 protection and stringent EMC design comparable to household appliances.



Flexible Application

- Compatible with components and cells of different specifications
- Five devices connected in parallel for flexible expansion
- Supports on-grid and off-grid and 100% three-phase unbalanced output

Maximizing Yields

- 200% over-dimensioning on the DC side to maximize power generation
- Available in advanced self consumption, peak shaving, and TOU modes
- Power control accuracy lower than or equal to 100 W for accurate anti-reverse current prevention

Enhanced Experience

- Features ultra-thin structure and low noise with thermalsiphon for high-efficient heat dissipation
- Full home power for linear, non-linear, and half-wave loads
- Easy installation with pre-manufactured connectors and sorted accessory package

Safe and Reliable

- Meets rigorous EMC requirements to ensure strong anti-interference ability and low emission
- Time for on-grid/off-grid switchover shorter than or equal to 10 ms to provide uninterrupted power
- Rated at IP66 and C5 to protect the product against humidity, heat, and salt spray

Parameters

Model	IES320-12K	IES320-15K	IES320-20K
PV input parameters			
Maximum PV power	24 kW	30 kW	40 kW
Maximum PV open circuit voltage	1000 V		
Rated PV voltage	600 V		
MPPT range	180 V to 850 V		
MPPT range at full load	350 V to 850 V		
Start voltage	200 V		
Number of MPPT channels	2	2	2
Number of inputs per MPPT channel	2	2	2
Maximum input current	32 A	32 A	32 A
Maximum short circuit current	40 A	40 A	40 A
Battery input			
Battery type	Lithium battery		
Voltage range	160 V to 700 V		
Maximum charging/discharging current	50 A		
Charging and discharging power	12 kW	15 kW	20 kW
Power grid			
Rated output power	12 kW	15 kW	20 kW
Rated output current	17.4 A	21.7 A	29 A
Rated output voltage	3/N/PE, 220 V/380 V, 230 V/400 V; 180 V to 270 V		
Rated output frequency	50 Hz		
Rated power factor	-0.8 to +0.8		
Current harmonic distortion rate	< 3%		
Off-grid			
Rated output power	12 kW	15 kW	20 kW
Rated output voltage	3/N/PE, 220 V/380 V, 230 V/400 V		
On-grid/Off-grid switching time	≤ 10 ms		
Current harmonic distortion	< 3% (linear resistive load)		
General parameters			
Maximum efficiency	98%		
European efficiency	97.50%		
Degree of protection	IP66		
Topology	Non-isolated		
Cooling mode	Intelligent air cooling		
Dimensions (W x H x D)	610 mm x 480 mm x 190 mm		
Altitude	4000 m (derating required for altitudes above 2000 m)		
Operating temperature:	-25℃ to +60℃		
Noise	< 45 dB		
Display	LED		
Communication	RS485, CAN, DI/DO, Ethernet, and Wi-Fi		
Standard	IEC/EN 62109-1, IEC/EN61000, IEC/EN 50549-1, and VDEAR-N-4105		

ALL Liquid-Cooled C&I Energy Storage System

IBS500 Series

Product Features

High efficiency

·Intelligent dual-cycle cooling technology to help reduce the power loss by **35%**
·Integrated with 3S to improve the system conversion efficiency to a value higher than **91.5%**
·Cell temperature diference not higher than 3° C owing to liquid cooled mode, improving the cycle life by **20%**

Stable and reliable

·Long-term running at rated power under **45**
·Adapt to a wide voltage range to resist harmonics within **THDu8%**

Extreme safety


·Four-level internal/external monitoring to recognize early safety alarm
·Pack-level fire protection+pressure relief + fire hydrant, fire risks are under control
·AC/DC three-level protection to allow quick isolation of faults

Flexible and intelligent

·Support remote **OTA**, precise troubleshooting in the cloud
·Compatible with communication interfaces for PV and charging pile
·3W+N+PE, One-click debugging for multiple devices



Topology diagram

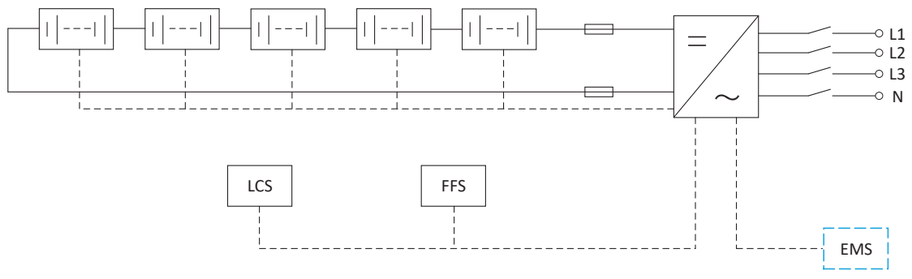


Parameters

Model	IBS520-04-125-261-W-EU
DC side	
Cell	LFP3.2V/314Ah
Configuration（pack）	1P52S/52kWh
Configuration（system）	1P260S
Nominal capacity	261.248kWh
DC voltage range	728V~936V
AC side（on-grid）	
Grid connection	3W+N+PE
Nomial power	125kW
Nominal AC voltage	400V
Nominal AC frequency	50Hz
THDi	<3%（Nominal power）
AC side（off-grid）	
Nominal output power	125kW
Nominal output voltage	400V
Voltage deviation	<1%U_N（Linear load）
Nominal output frequency	50Hz
THDu	<3%（Linear load）
System	
AC access	Bottom forward line
Maximum efficiency	91.5%
Rated charge/discharge rate	≤ 0.5P
Temperature control method	PACK（Liquid cooling）+PCS（Liquid cooling）
Operation temperature range	-30~+55（De-rating over+45）
Fire emergency system	Smoke and heat detectors + thermal aerosol (PACK level) + thermal aerosol (compartment level) + pressure relief device + firefighting water-injection interface
Operation humidity range	0~95%
Noise	≤ 75dB
Degree of protection	IP55
Dimensions（W×D×H）	950*1412*2355mm
Weight	≈ 2500kg
Anti-corrosion degree	C4M/C5(Optional)
Communication	
Communication interface	Ethernet / RS485 / CAN / DIDO
Communication protocol	Modbus-RTU / Modbus-TCP / CAN2.0B

Energy Storage Industry Solution

Safe power supply solution

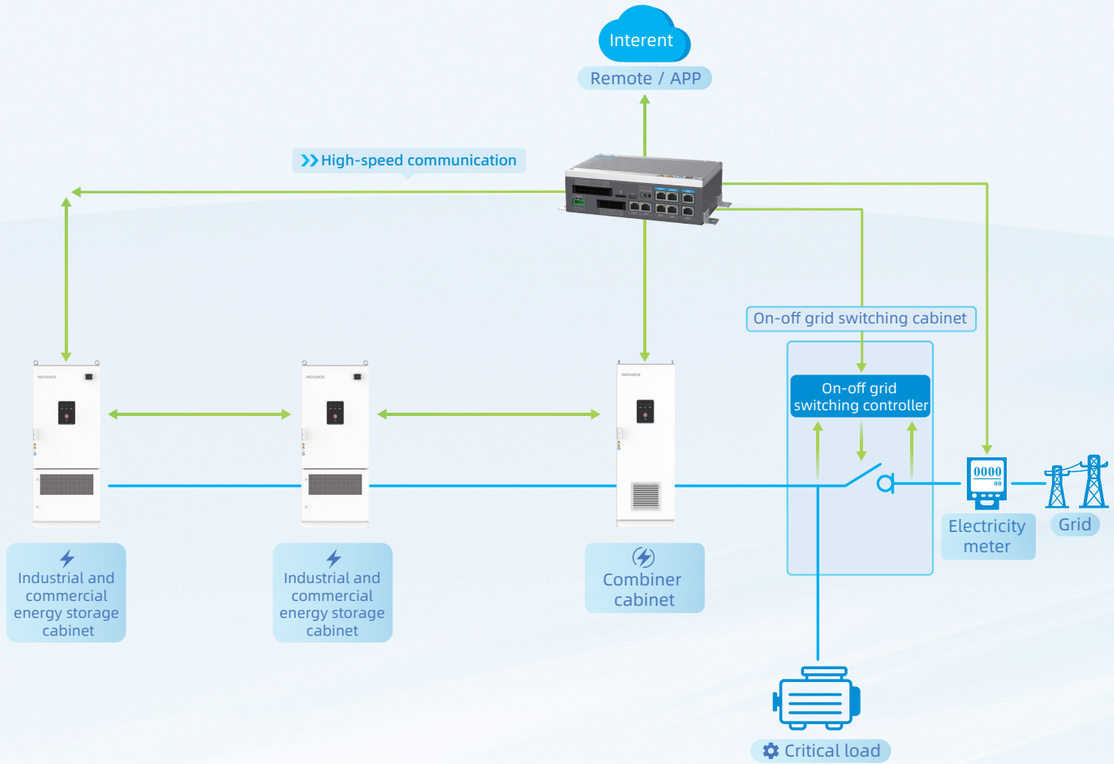

Quick switchover, stable power supply

System switchover time ≤20 ms to ensure the stable operation


Flexible application, safe and efficient

Supports selecting parallel units and on-off grid switching cabinet flexibly

Smart detection and quick adjustment

Active/Passive on-off grid switchover to ensure safe operation

Safe power supply solution

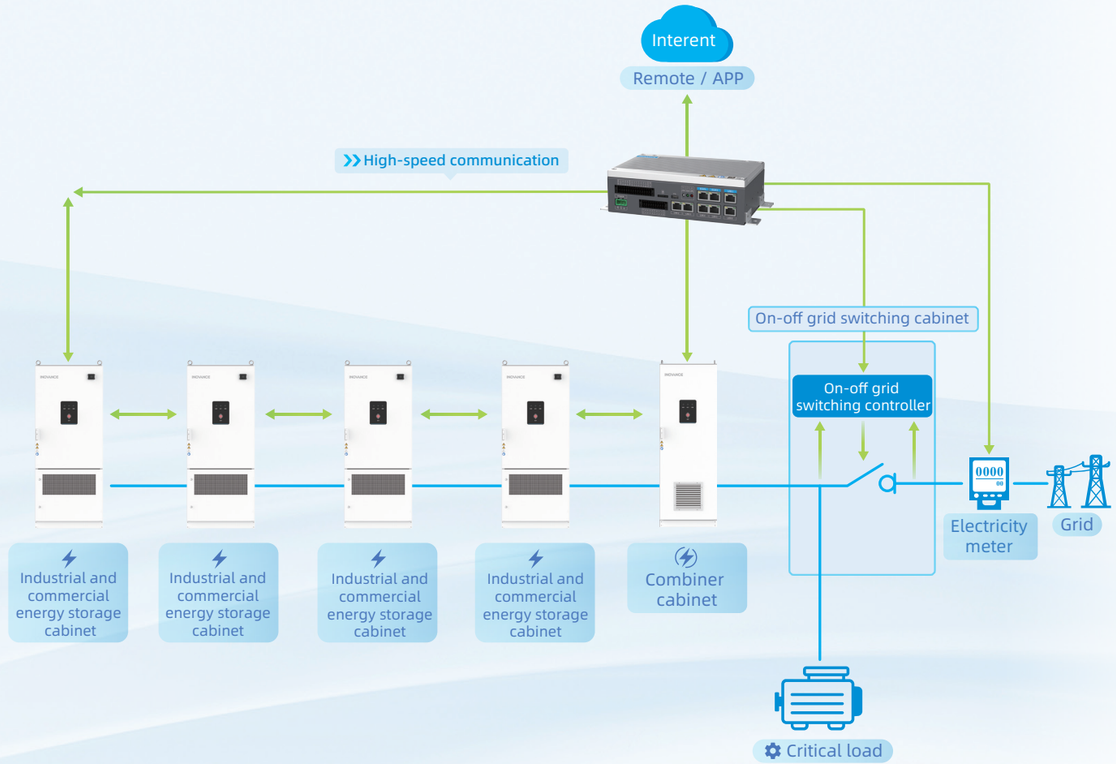

Quick switchover, stable power supply

System switchover time ≤20 ms to ensure the stable operation

Flexible application, safe and efficient


Supports selecting parallel units and on-off grid switching cabinet flexibly

Smart detection and quick adjustment


Active/Passive on-off grid switchover to ensure safe operation

Energy Storage Industry Solution

Safe power supply solution

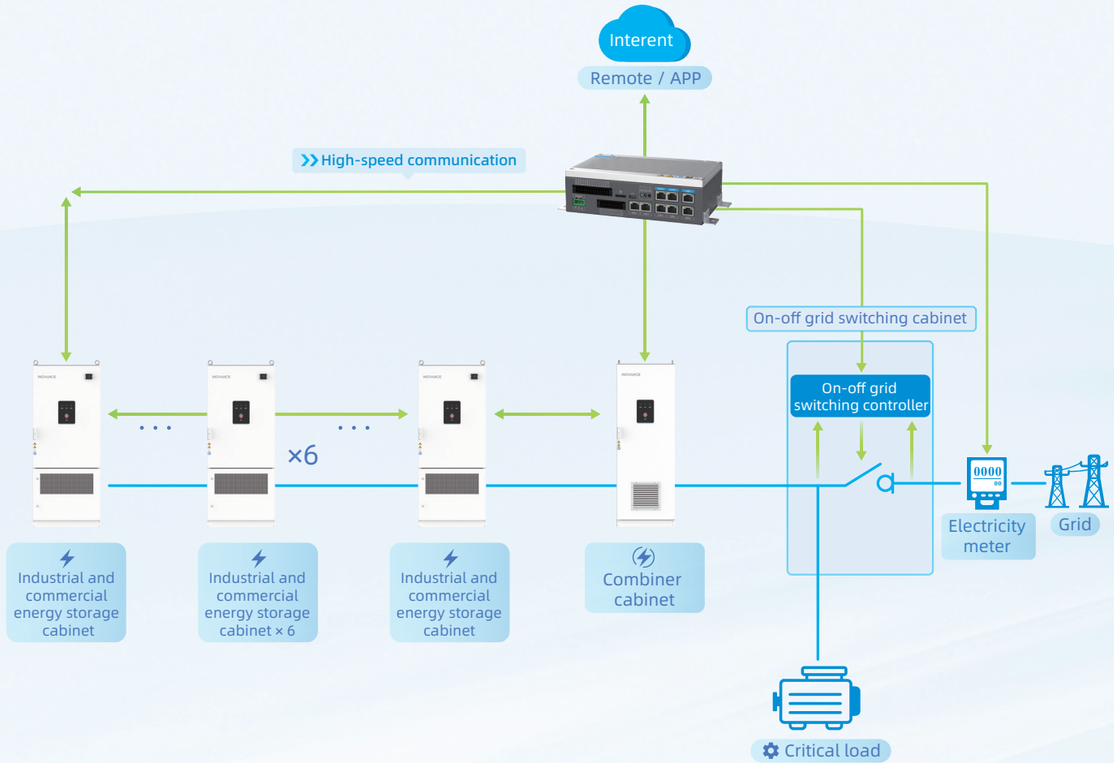

Zero-carbon zone solution

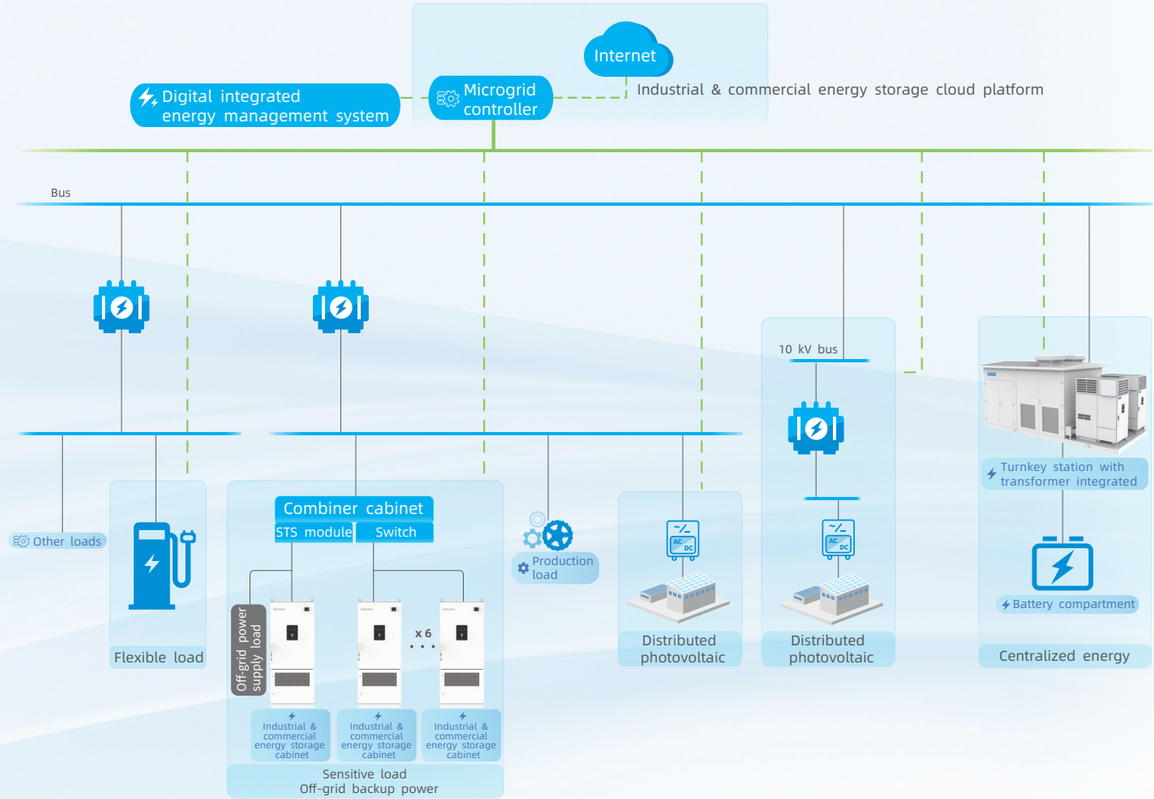

Quick switchover, stable power supply

System switchover time ≤20 ms to ensure the stable operation

Flexible application, safe and efficient

Supports selecting parallel units and on-off grid switching cabinet flexibly

Smart detection and quick adjustment

Active/Passive on-off grid switchover to ensure safe operation

Generation, grid, load, storage integrated design

Configuration for multiple scenarios and find the optical configuration

Cloud-edge-device integrated architecture


Tailored for typical commercial and industrial scenarios and enables flexible access for all types of equipment

AI scheduling

On-site renewable-energy consumption, easing grid impact, and delivering stronger investment returns.

Achievement

Large-scale energy storage cases

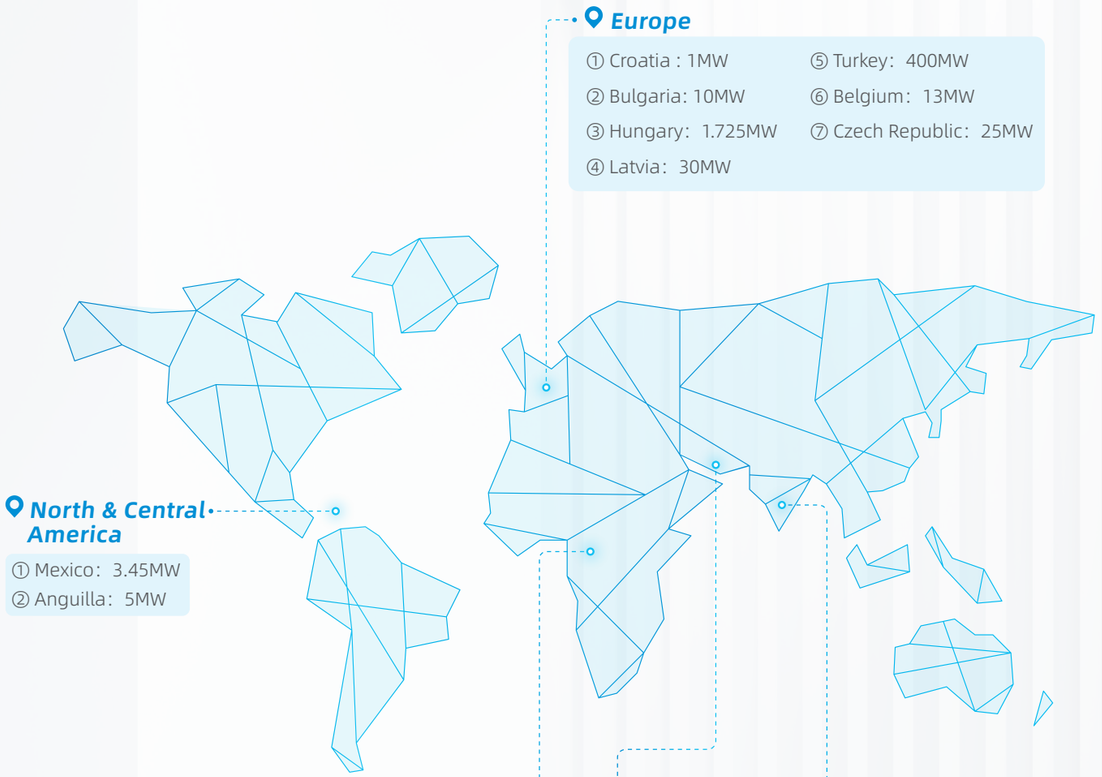



500MW/2GWh grid-forming project in Inner Mongolia



115MW energy storage project of **data center** in Hebei



100MW **capacitor+lithium hybrid energy storage frequency regulation** project in Shanxi



15MW/51MWh **high-altitude microgrid** project in Qinghai



50MW/50MWh, photovoltaics, with **high-altitude** of 4500m in Sichuan



40MW/120MWh **user side** energy storage project in Jiangsu



150MW/600MWh **grid-forming** project in Inner Mongolia



15MW **coastal high-protection** project in Guangxi



450MW/900MWh project in Inner Mongolia



200MW/400MWh energy storage project in Guangxi



100MW/200MWh **grid-forming** project in Yunnan



150MW/300MWh energy storage project in Shanxi

Energy storage cases for industry and commerce



37 x 125kW/261kWh energy storage system project in the factory in Suzhou, Jiangsu



42 x 100kW/232kWh energy storage system project in the factory of Shanghai

Energy storage solutions



1MW/2.08MWh integrated optical storage and charging project in the factory of Nanjing, Jiangsu