


Copyright:Copyright infingmengt reserved

| Amendment | Description |
|---|---|
| | |


Unit:Millimeter(mm)

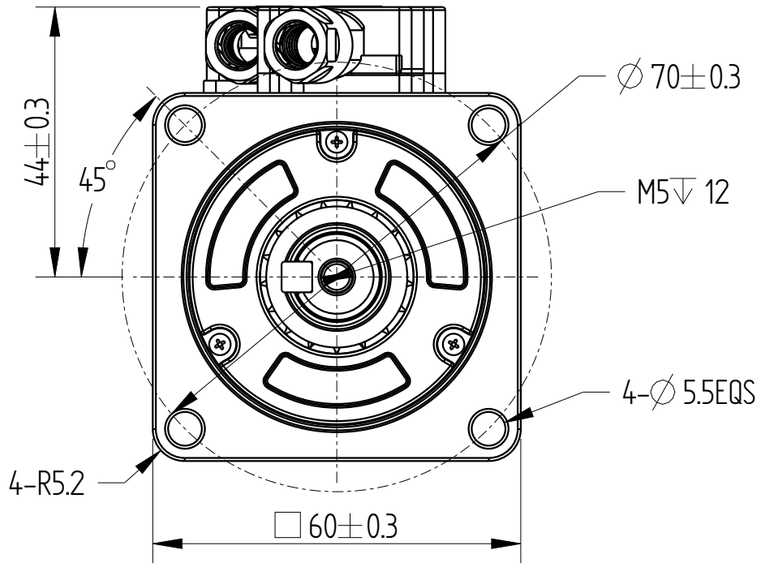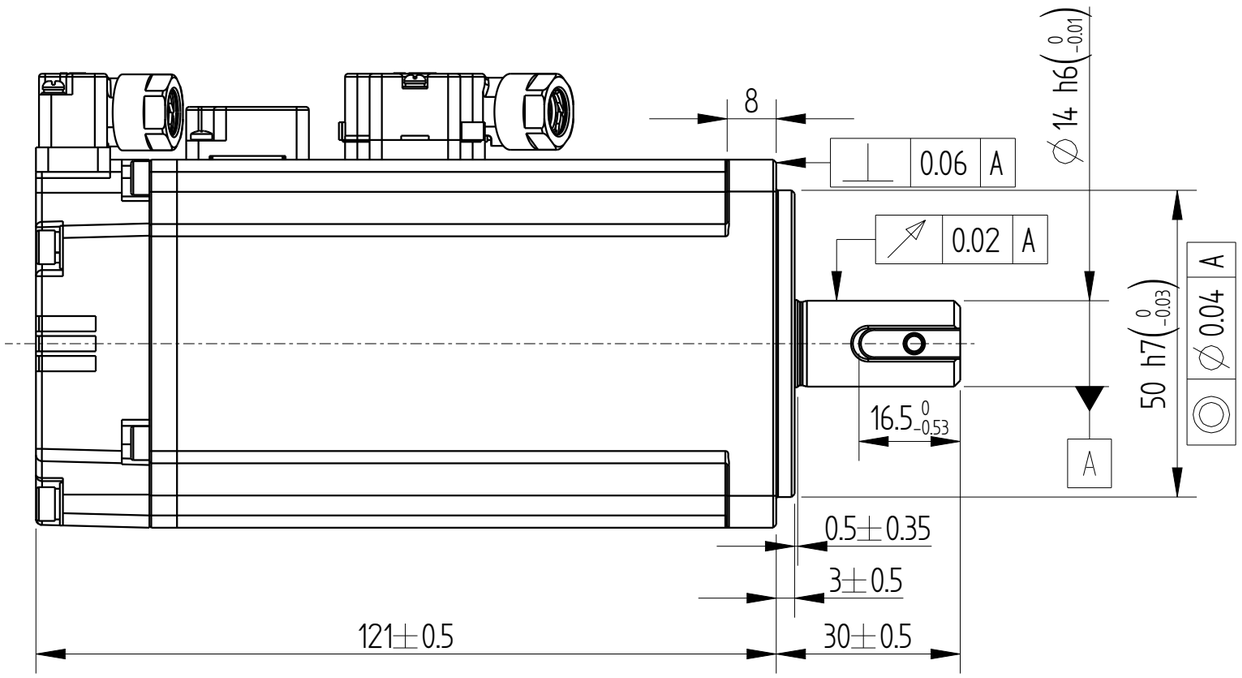


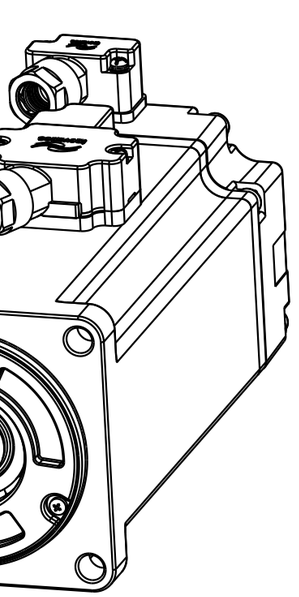



| Basic function parameters | |
|---|---|
| Rated power kW | 0.4 |
| Rated voltage V | 220 |
| Rated current A | 2.5 |
| Peak current at rated speed A | 9.8 |
| Rated torque Nm | 1.27 |
| Peak torque at rated speed Nm | 4.45 |
| Rated speed rpm | 3000 |
| Max speed rpm | 7000 |
| Rotor inertia kg · $cm^2$ | 0.157±10% |
| Encoder resolution | 23bit |
| Insulation class | F(155) |
| Protection class | IP67 |
| Static torque of brake Nm | ⩾1.5 |
| Brake power supply V | DC24±10% |
| Brake backlash° | ⩽1 |
| Duty cycle | S1 |
| Radial load N | ⩽245 |
| Axial load N | ⩽74 |

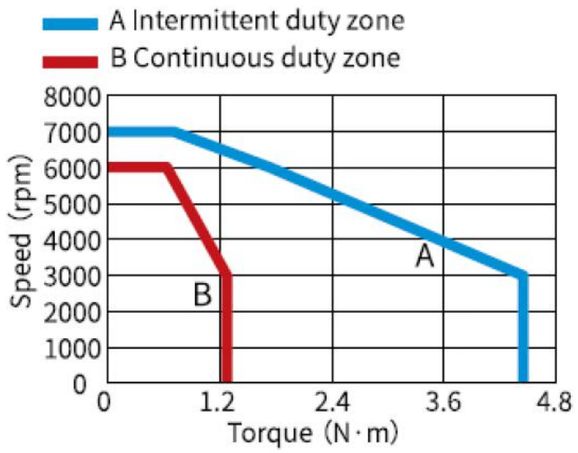


Dimension of shaft end

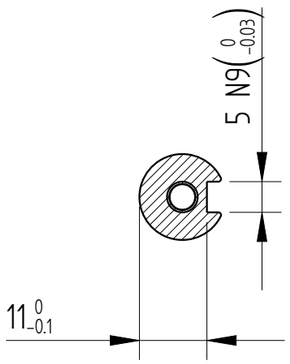

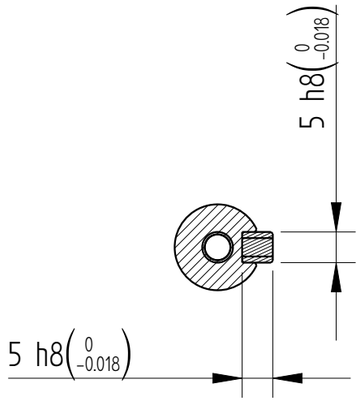
Dimension of shaft end with key

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | Motor Outline Drawing | | 01117857-WX |
| | | | | | | |
| B01 | Replace | / | 20250528 | | Mark | INOVANCE |
| Version | Change method | Changed by | Date | / | | |
| Design | / | | | | | |
| Check | / | | | | | |
| Craft | / | | | | | |
| Verify | / | | | Weight | Scale | Version | Page 1 of 1 |
| Standardization | / | | | 1.48kg | 1:2 | B01 | Model | MS1H1-40B30CB-A334R-INT |
| Approve | / | | | | | |

INOVANCE

A3