
正样
2024.12.23
B01


Copyright: Copyright infringement reserved

Amendment	Description

外部公开


Unit: Millimeter (mm)

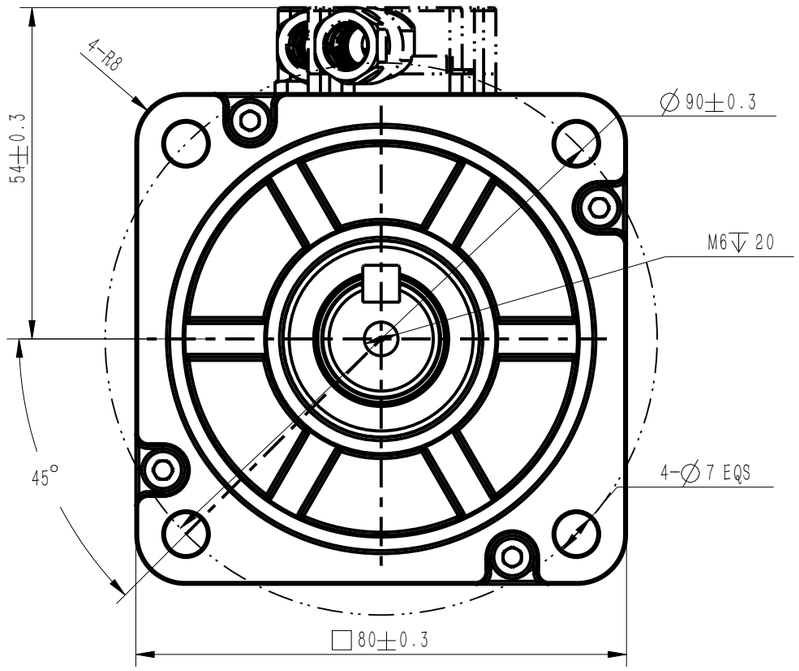


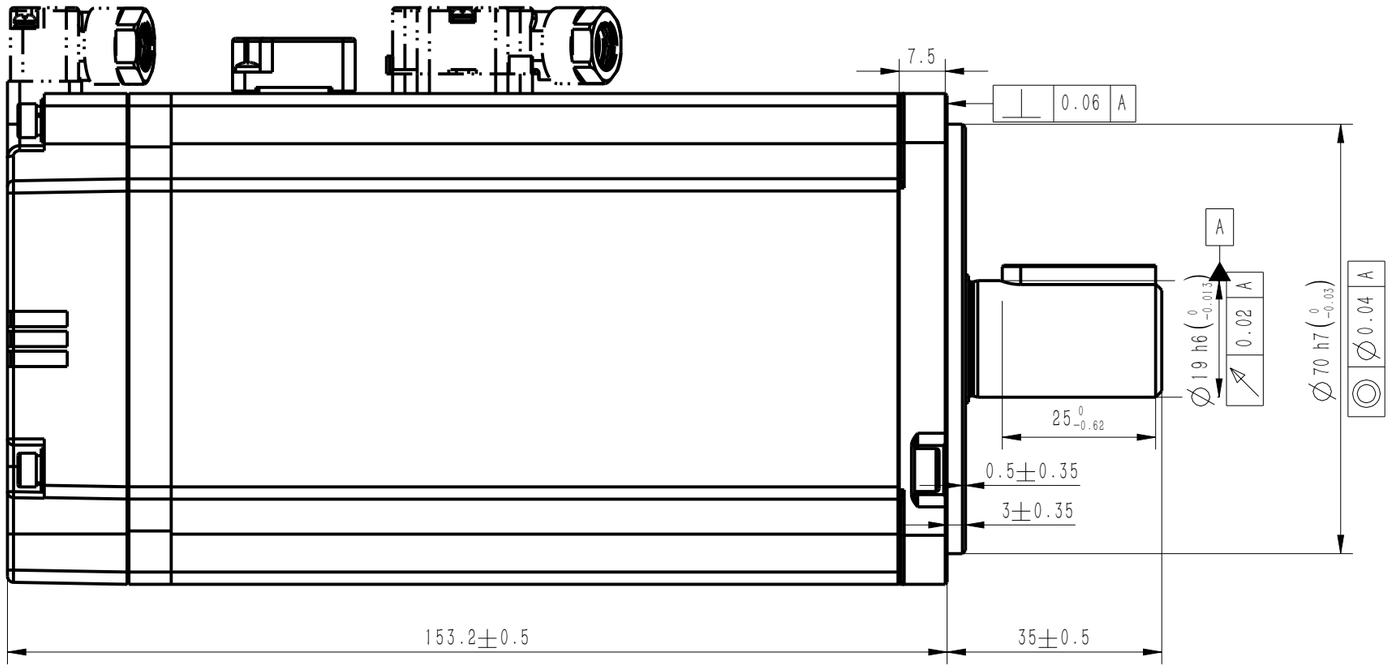




Basic function parameters	
Rated power kW	1
Rated voltage V	220
Rated current A	6.5
Peak current at rated speed A	24
Rated torque Nm	3.18
Peak torque at rated speed Nm	11.1
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.97±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾3.2
Brake power supply	DC24V±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial line load N	⩽392
Axial load N	⩽147

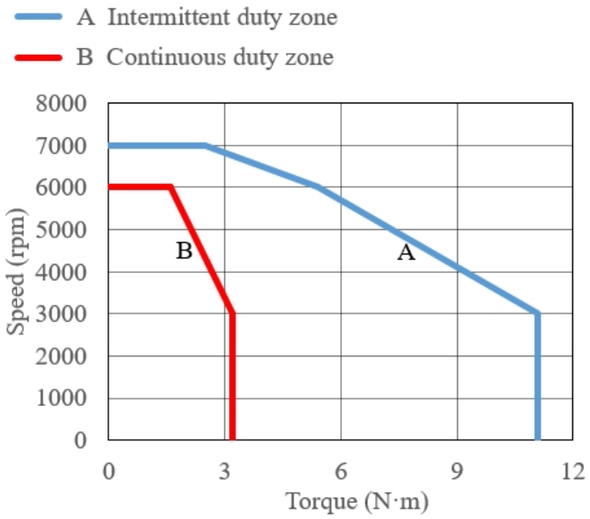

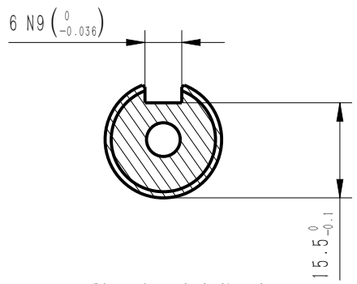

Dimension of shaft end



Dimension of shaft end with key

				Motor Outline Drawing	01117863-WX	
B01	New Archive	/	20241121			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.9kg	1:1	B01
Approve	/					
					Page 1 of 1	
					Model	MS1H4-10C30CB-A634R-INT

INOVANCE

A3