

正样
2023.09.25
B00

Amendment	Description


外部公开


Copyright:Copyright infringement reserved.

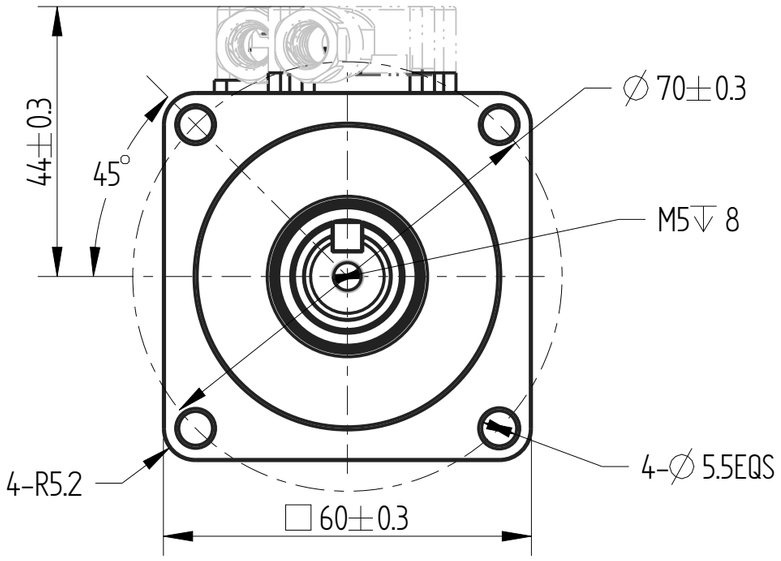

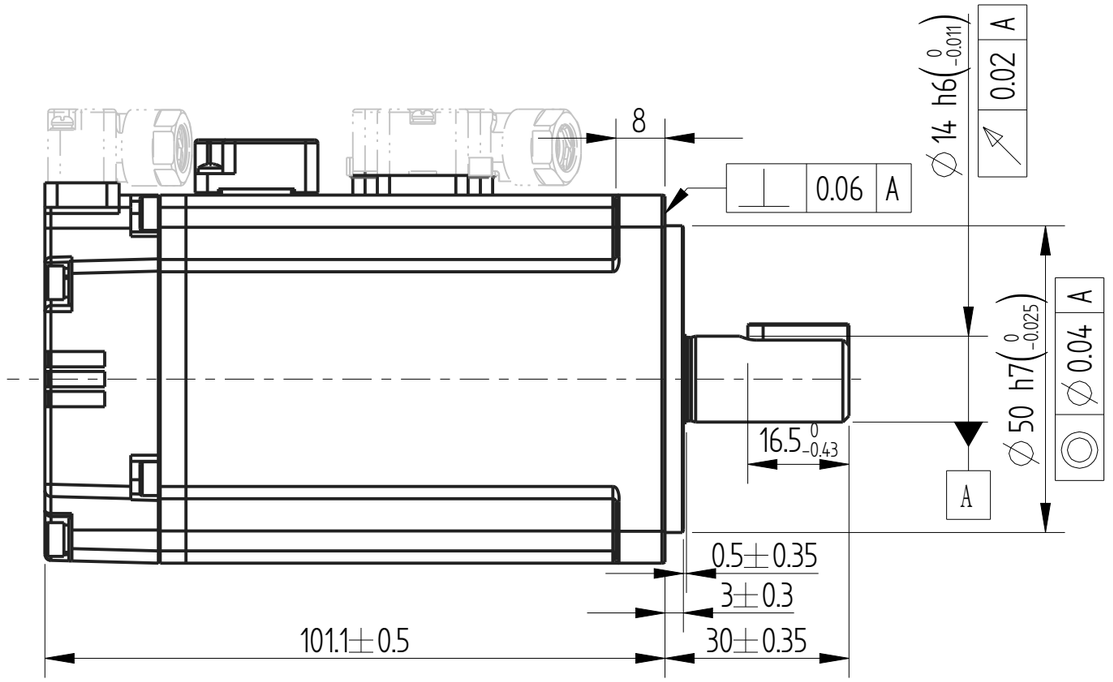


Basic function parameters	
Rated power KW	0.2
Rated voltage V	220
Rated current A	⩽1.3
Peak current at rated speed A	⩽5.3
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.23
Encoder resolution	26位
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾1.5
Brake power supply	DC24±10%
Duty cycle	S1
Radial line load N	⩽245
Axial load N	⩽74

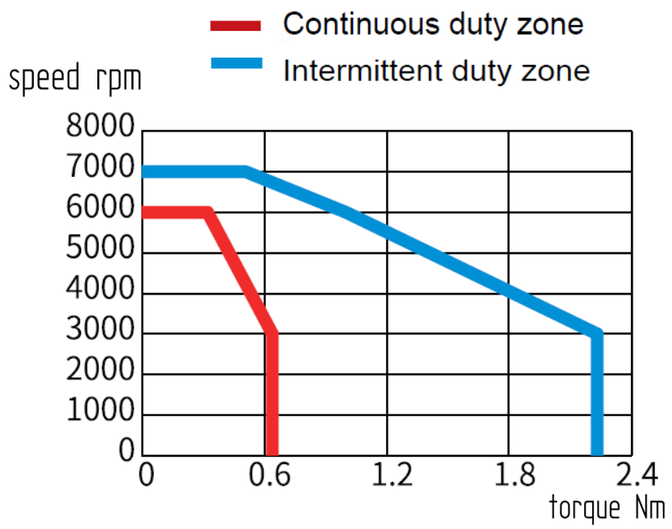




Dimension of shaft end



Dimension of shaft end with key

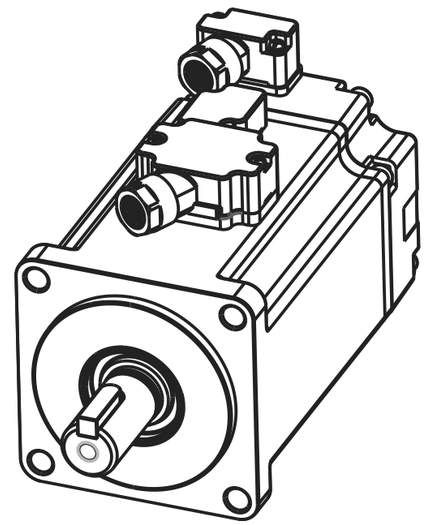

				Motor outline drawing		01117865-WX	
B00	New Archive	/	20230825				
Version	Change method	Change by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			/	1:1	B00	Model MS1H4-20B30CB-A634R-INT
Approve	/						

INOVANCE

A3