

正样
2025.10.30
B03

Copyright:Copyright infingmengt reserved


Amendment	Description


外部公开

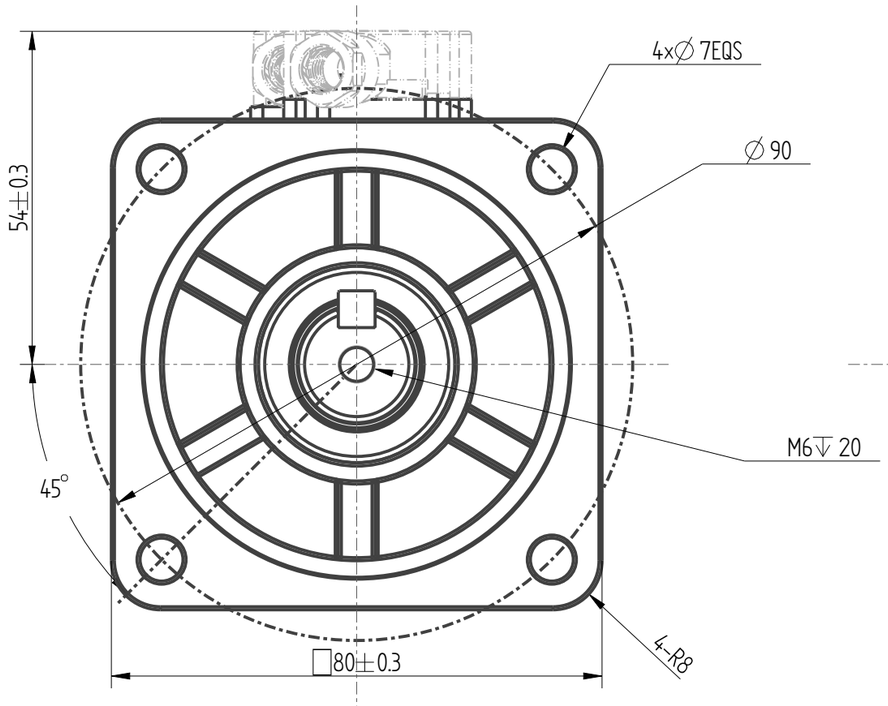

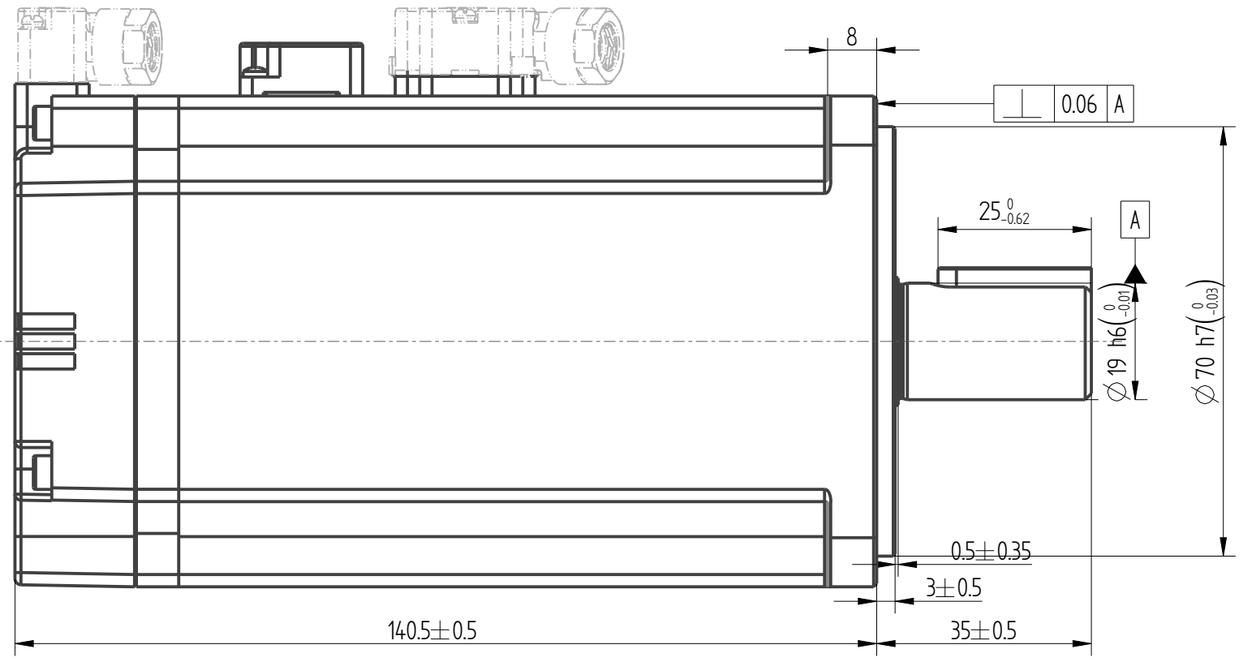


Basic function parameters	
Rated power kW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.37
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg.cm^2	1.51±10%
Encoder resolution	23 bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾3.2
Brake power supply V	DC 24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

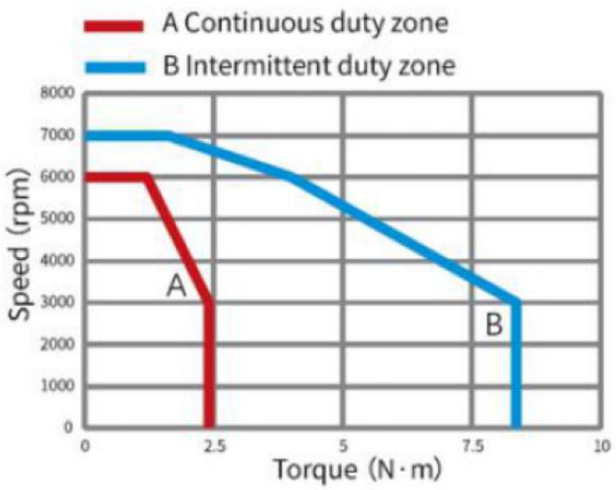


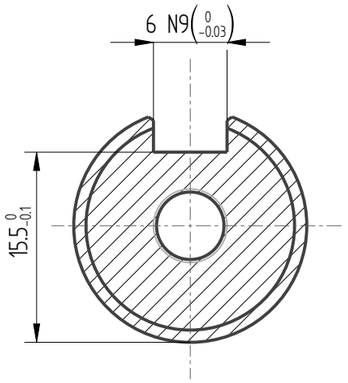

Dimension of shaft end

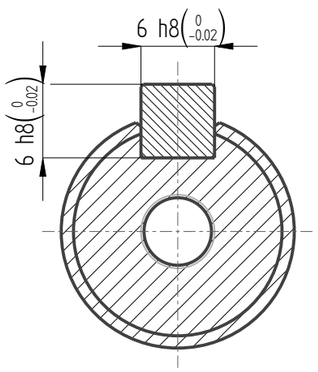

Dimension of shaft end with key

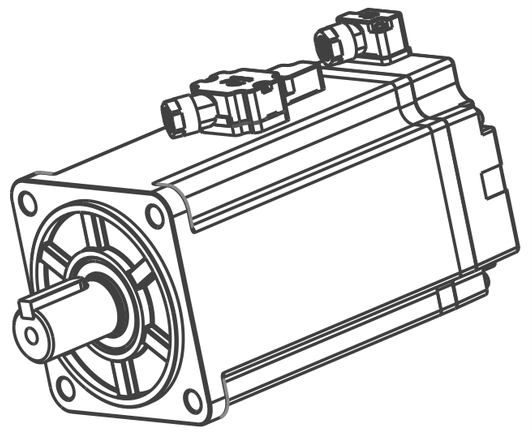

				Motor outline drawing		01117879-WX
B03	Replace	/	20250821			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.82kg	1:1	B03
Approve	/					

Page 1 of 1

Model: MS1H4-75B30CB-A334R-INT

INOVANCE

A3