

Copyright:Copyright infingmengt reserved


Amendment	Description


Unit: Millimeter (mm)

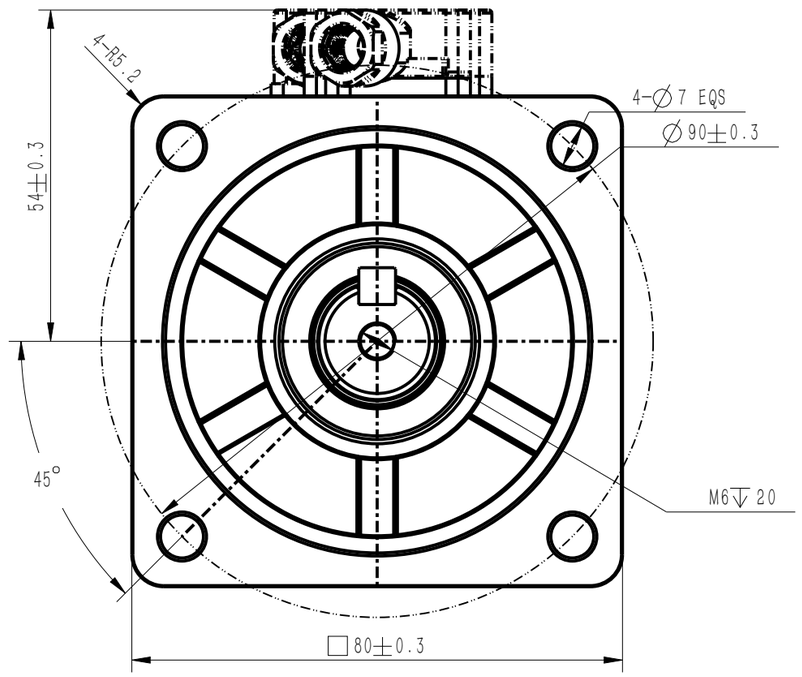

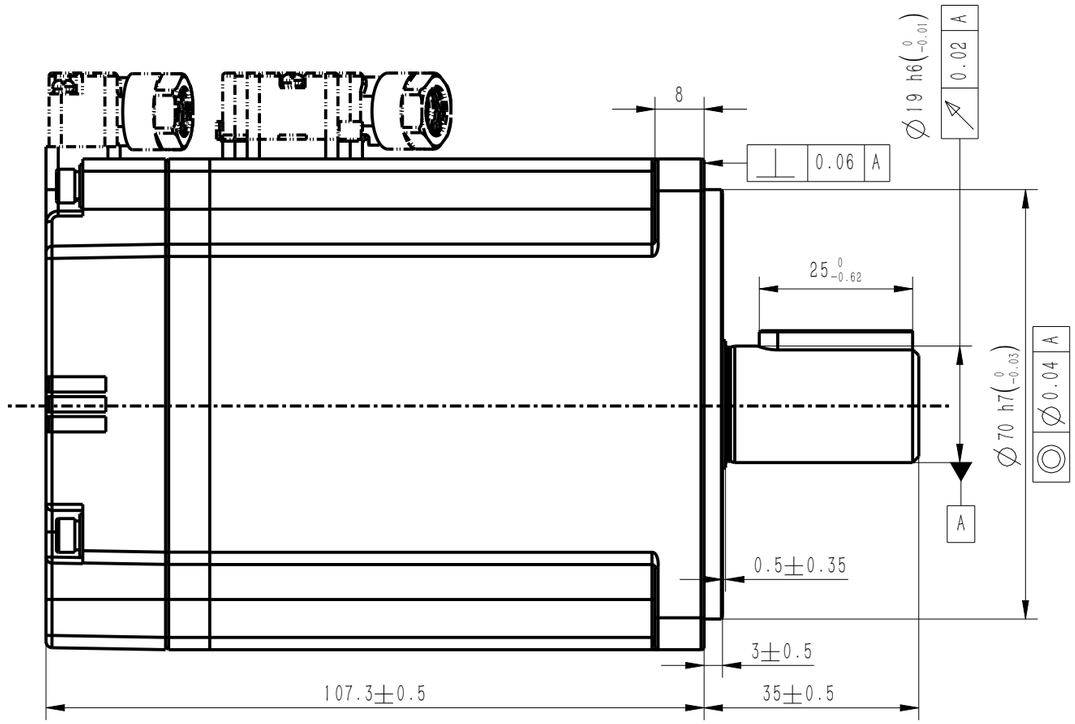


Basic function parameters	
Rated power kW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg.cm^2	1.46±10%
Encoder resolution	23bit
Insulation class	F (155)
Protection class	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

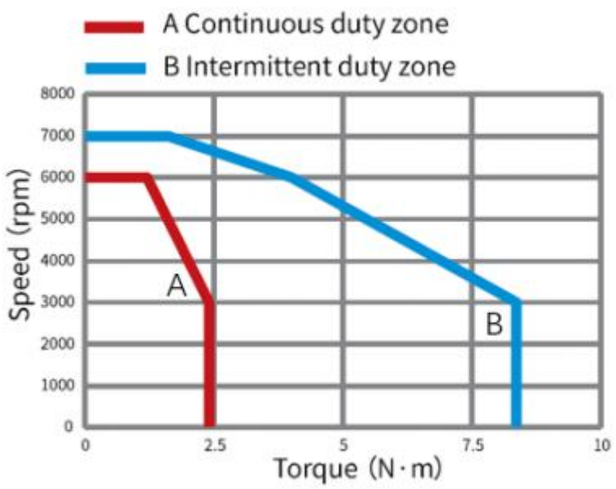




Dimension of shaft end



Dimension of shaft end with key

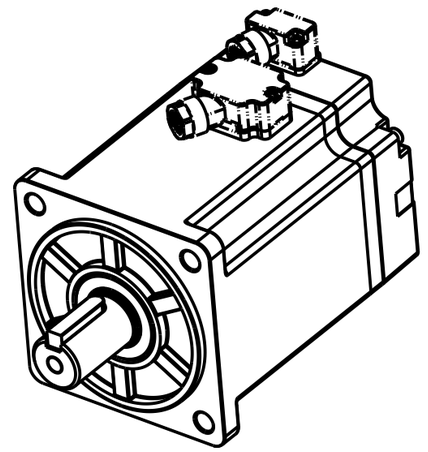

				Motor outline drawing	01117880-WX	
B02	Replace	/	20250410			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.18kg	1:1	B02
Approve	/					

Page	1 of 1
Model	MS1H4-75B30CB-A331R-INT

INOVANCE

A3