

正样
2025.02.08
301

Copyright: Copyright infringement reserved


Amendment	Description


外部公开

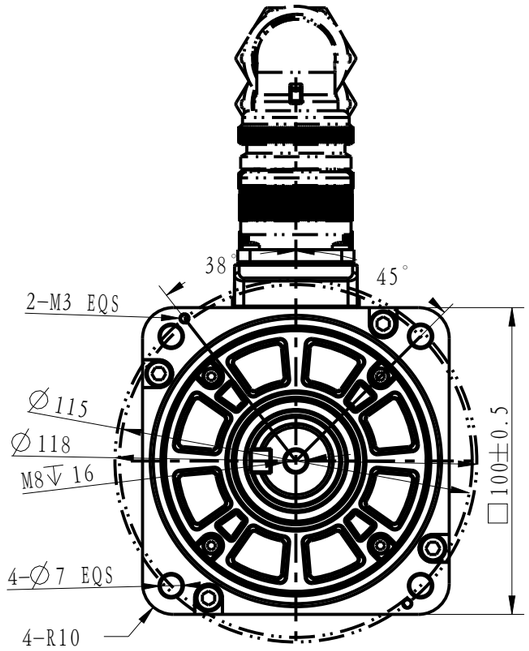

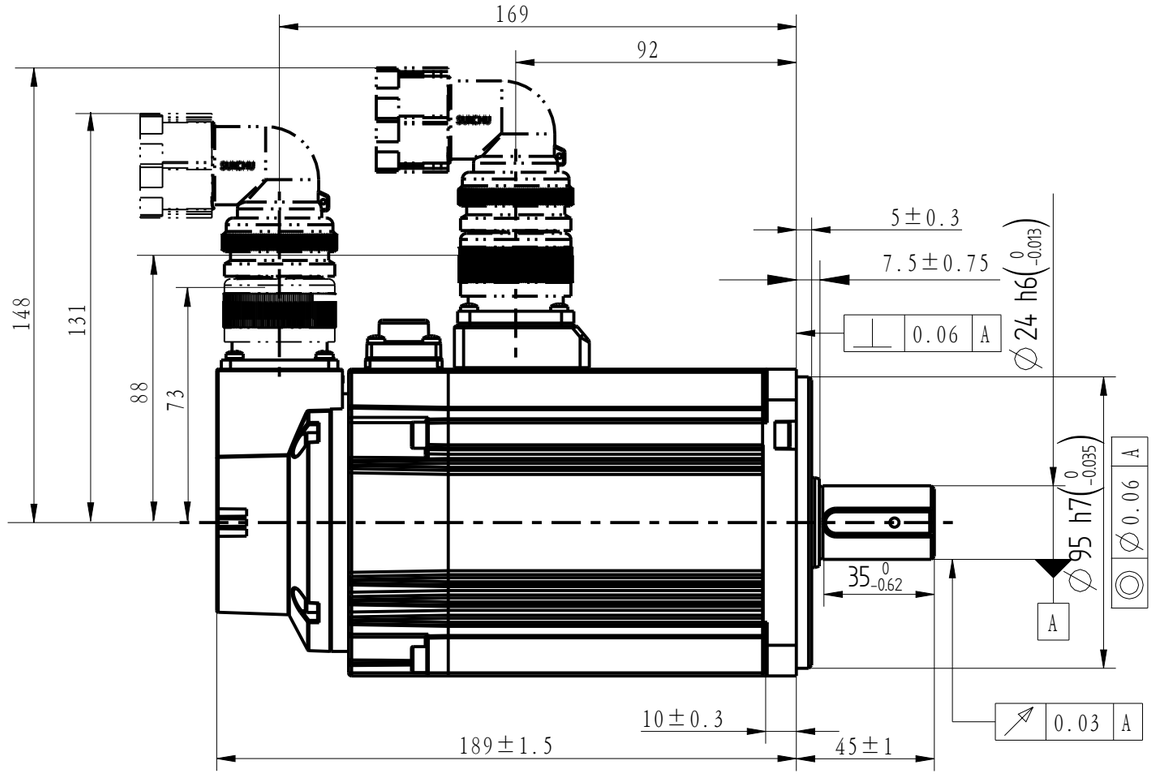


Basic function parameters	
Rated power kW	1.5
Rated voltage V	220
Rated current A	8.6
Peak current at rated speed A	32
Rated torque Nm	4.9
Peak torque at rated speed Nm	14.7
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg.cm^2	3.17±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾8
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial line load N	⩽686
Axial load N	⩽196

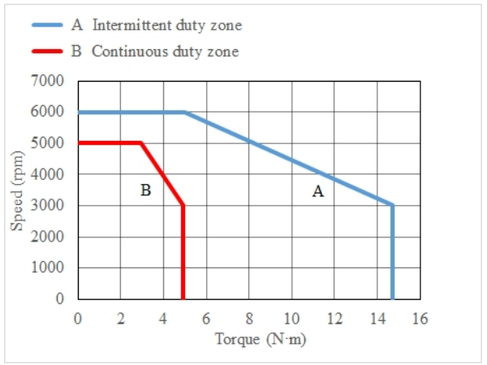

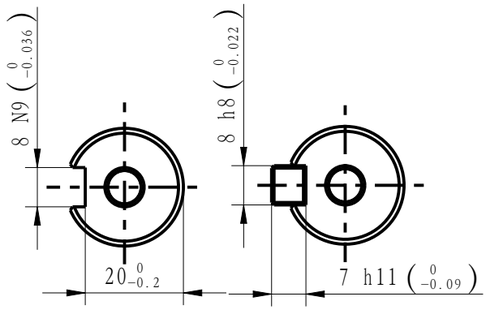

Dimension of shaft end　　Dimension of shaft end with key



				Motor Outline Drawing	01117887-WX
B01	Replace	/	20241227		
Version	Change method	Changed by	Date		
Design	/			/	Mark INOVANCE
Check	/				
Craft	/				
Verify	/			Weight	Scale / Version / Page 1 of 1
stangardization	/			5.75kg	1:2 / B01 / Model MS1H2-15C30CB-A634R -INT
Approve	/				

INOVANCE

A3