
正样
2023.10.09
B00


Copyright: Copyright infringement reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

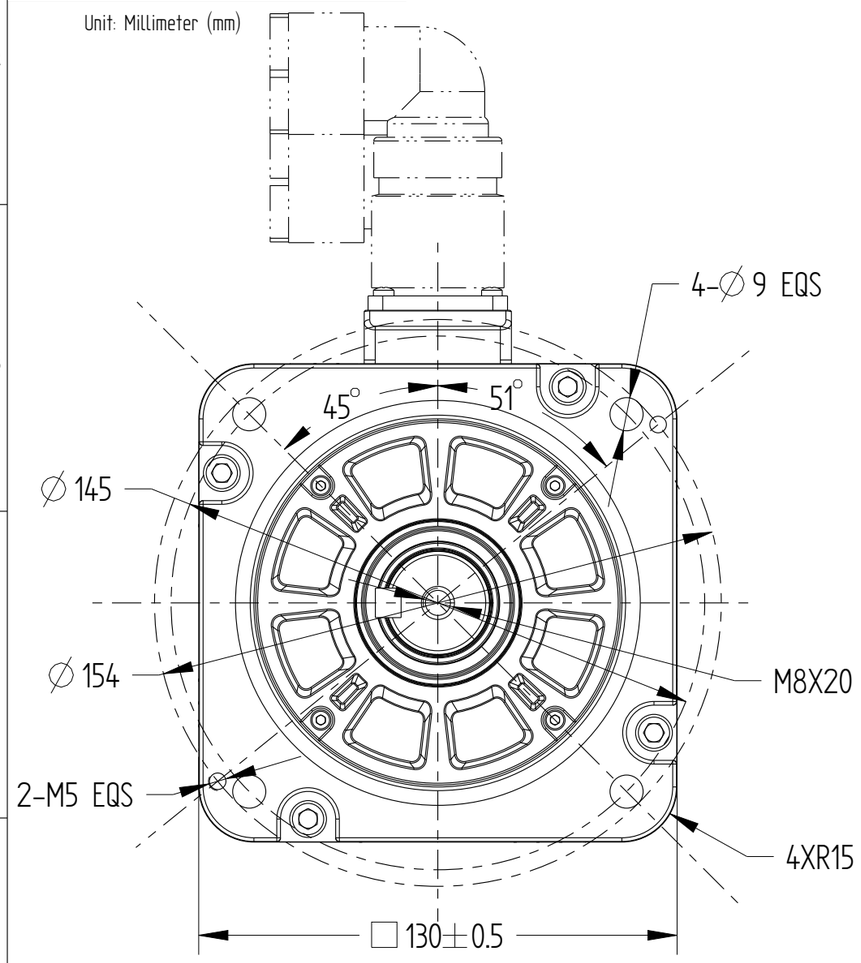

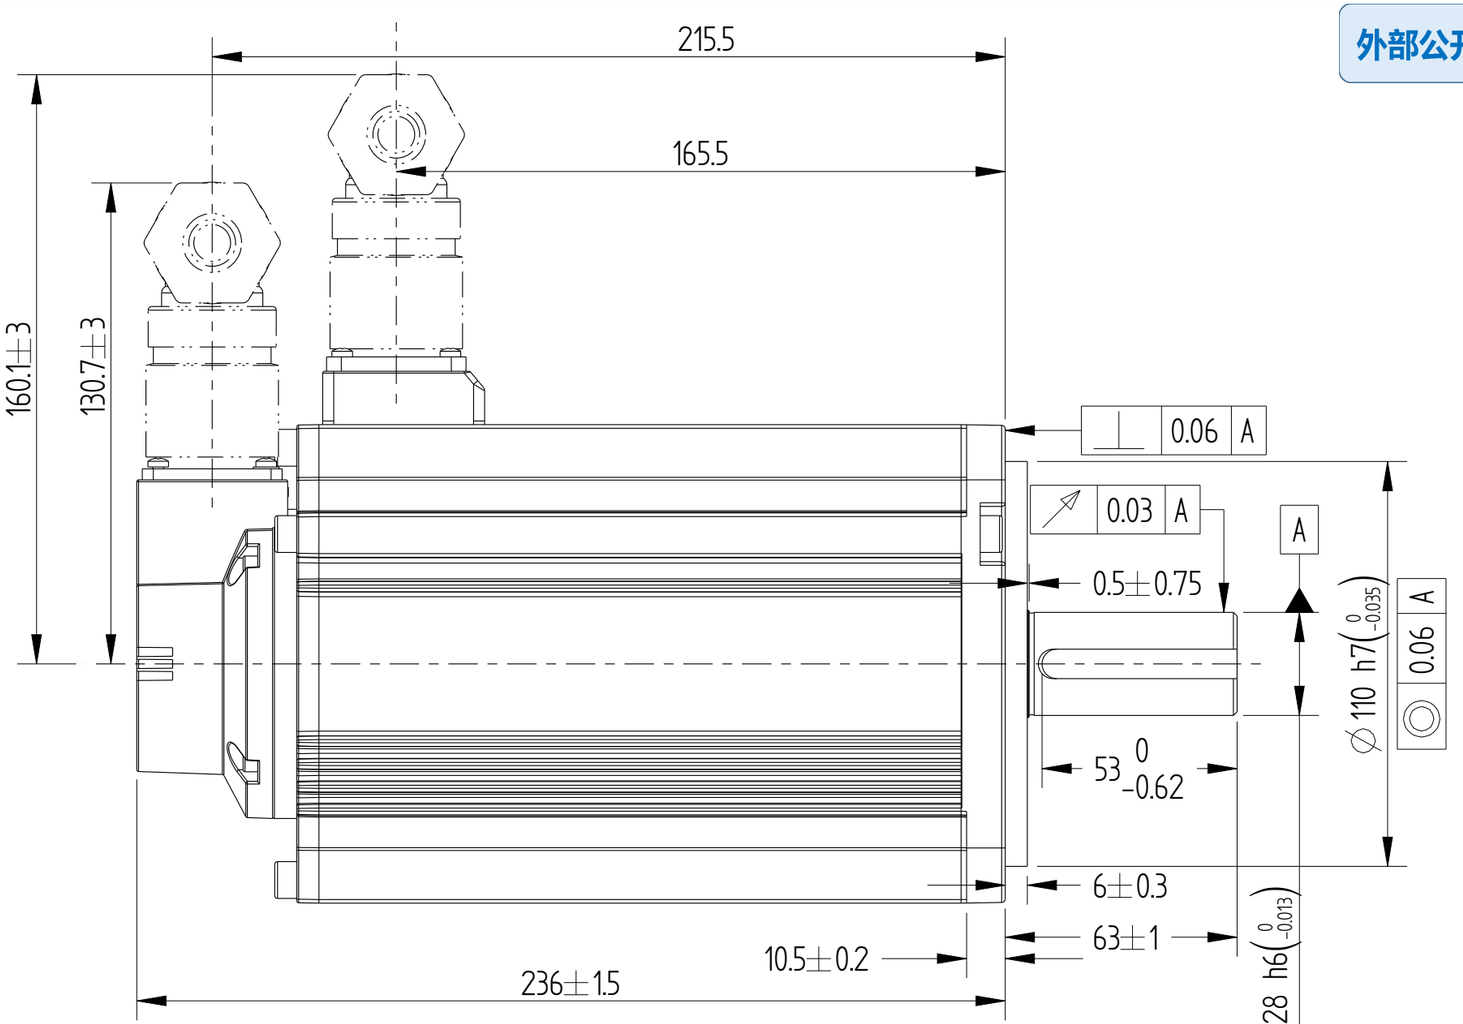


Basic function parameters	
Rated power KW	4
Rated voltage V	220
Rated current A	⩽22
Peak current at rated speed A	⩽67.5
Rated torque Nm	12.6
Peak torque at rated speed Nm	31.5
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	9±10%
Encoder resolution	26
Insulation class	F(155℃)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	⩽1176
Axial load N	⩽392

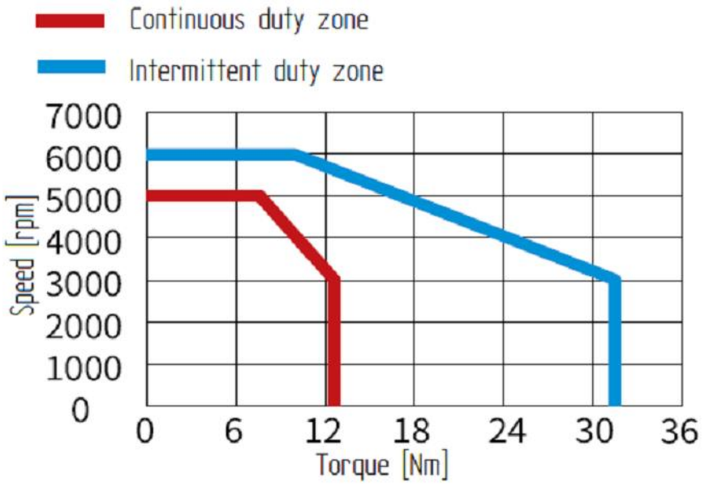


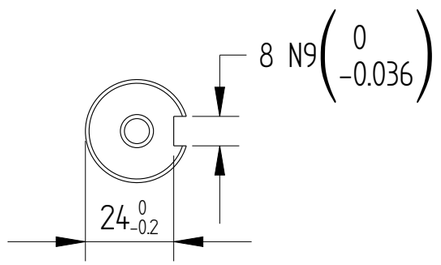

Dimension of shaft end
4:5

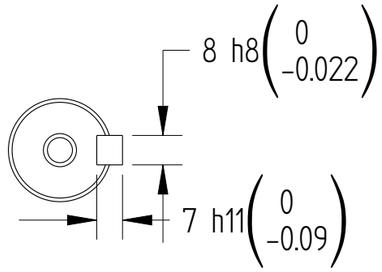

Dimension of shaft end with key
4:5

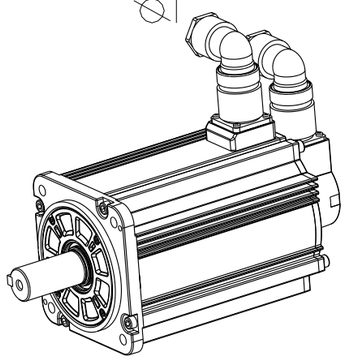

				Motor Outline Drawing	01117903-WX	
B00	New Archive	/	20230821			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			13.2kg	3:5	B00
Approve	/					

Page 1 of 1		
Model	MS1H2-40C30CB-A631R-INT	

INOVANCE

A3