

Copyright:Copyright infingmengt reserved


Amendment	Description


Unit: Millimeter (mm)

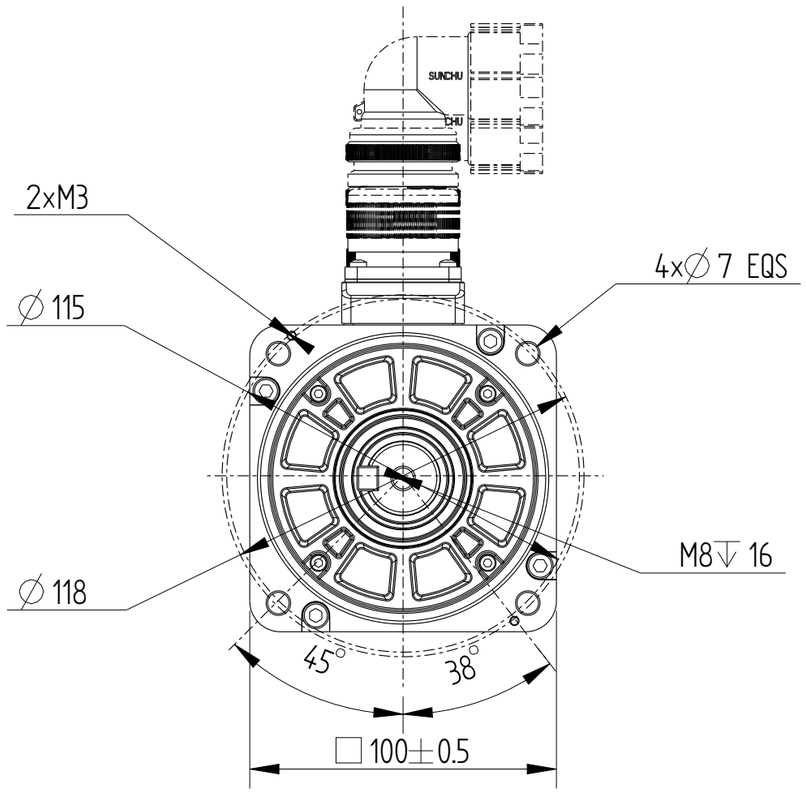

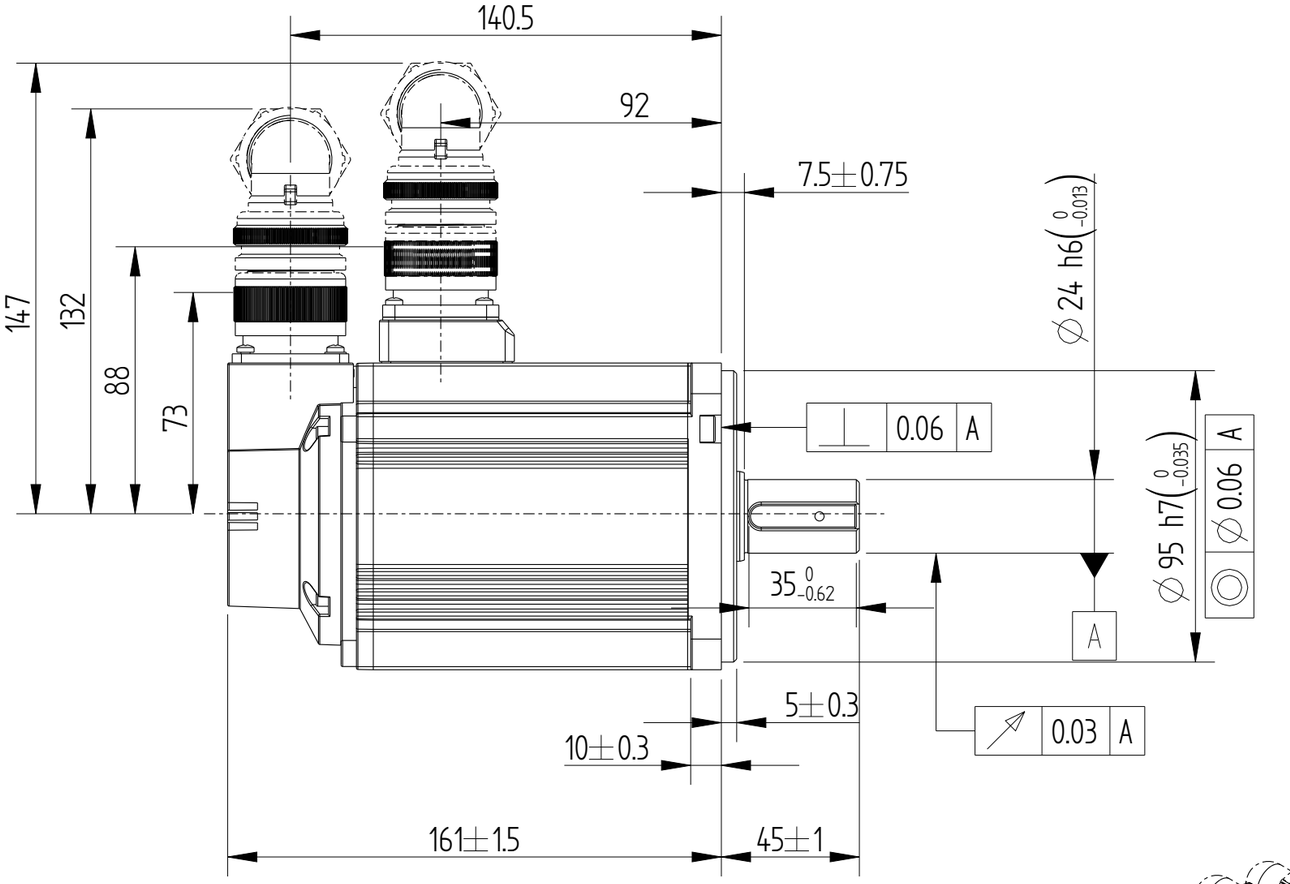


Basic function parameters	
Rated power KW	1.5
Rated voltage V	380
Rated current A	4.2
Peak current at rated speed A	14
Rated torque Nm	4.9
Peak torque at rated speed Nm	14.7
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	2.35±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash °	/
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

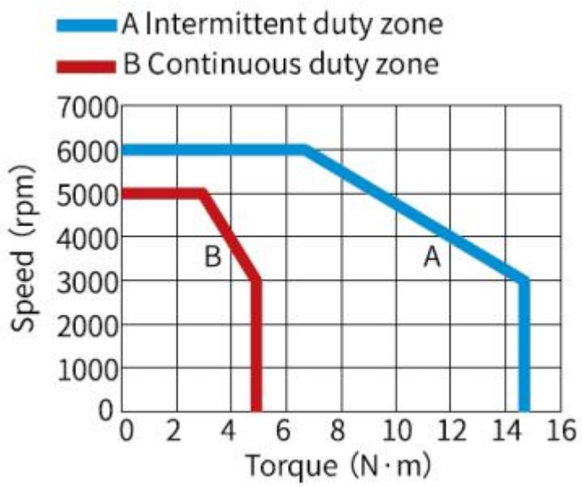


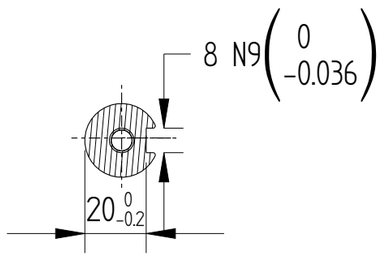

Dimension of shaft end

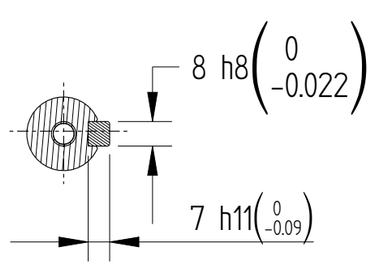

Dimension of shaft end with key

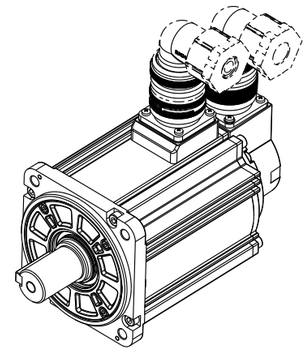

				Motor Outline Drawing		01117917-WX	
B01	Replace	/	/				
Version	Change method	Changed by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			4.65kg	1:2	B01	Model MS1H2-15C30CD-A331R-INT
Approve	/						

INOVANCE

A3