

Copyright:Copyright infingmengt reserved


Amendment	Description


Unit: Millimeter (mm)

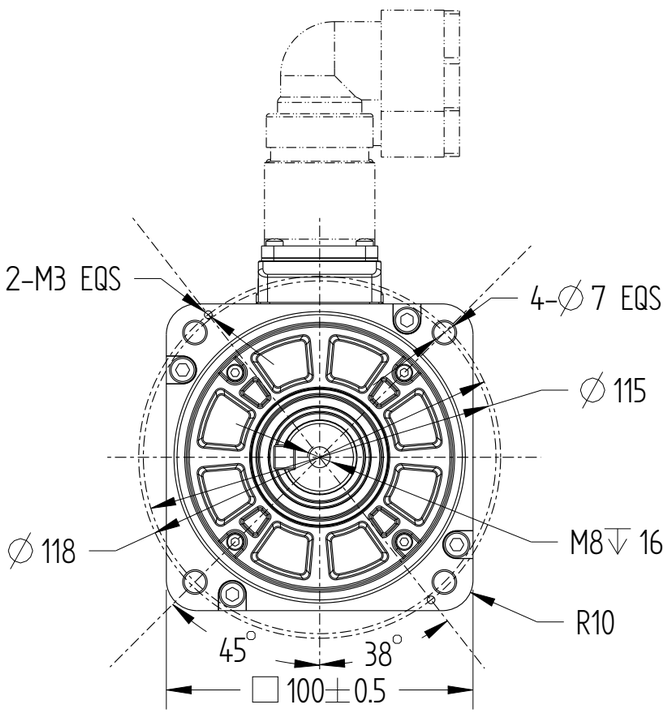

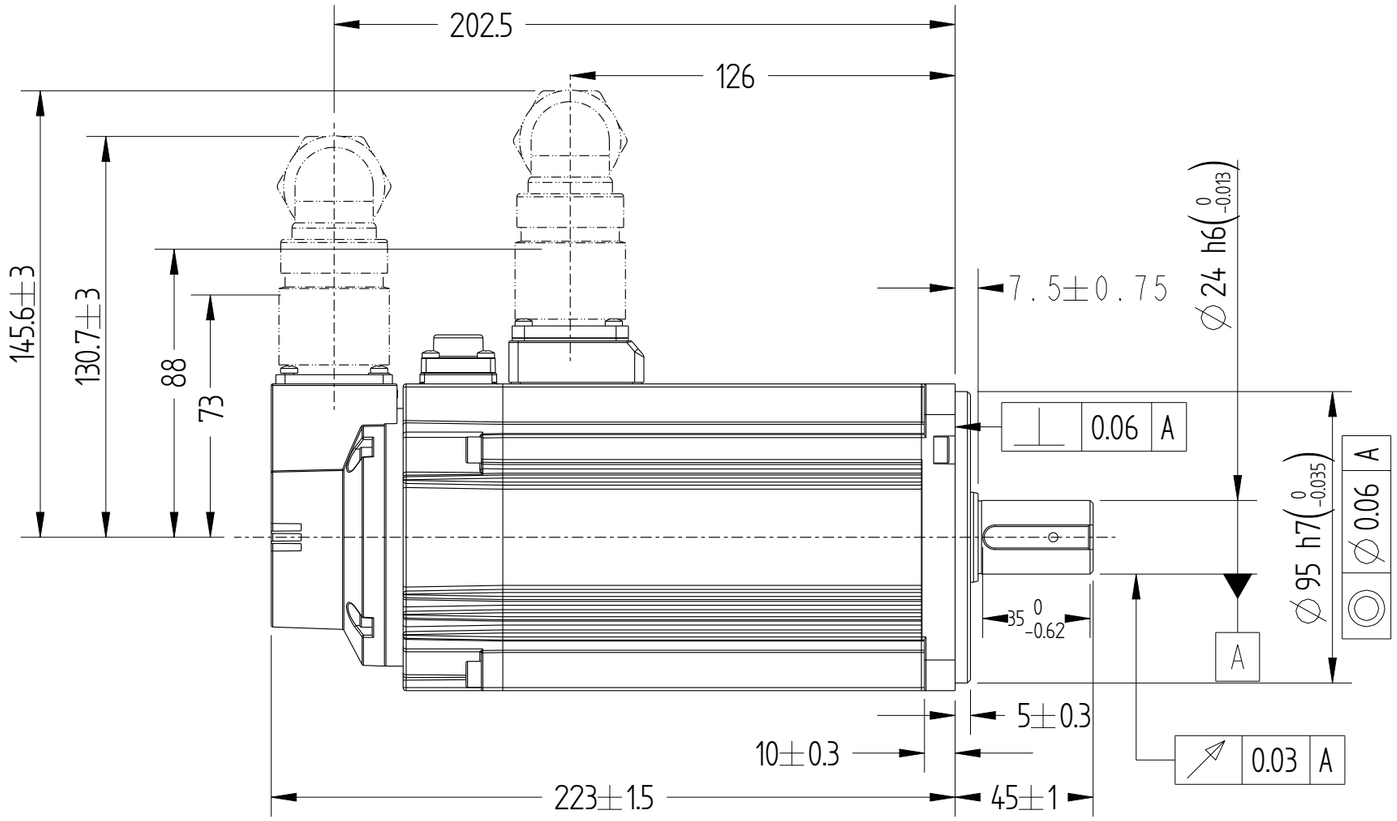


Basic function parameters	
Rated power KW	2.5
Rated voltage V	220
Rated current A	⩽14.7
Peak current at rated speed A	⩽53
Rated torque Nm	7.96
Peak torque at rated speed Nm	23.9
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	4.3±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	⩾8
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial load N	⩽686
Axial load N	⩽196

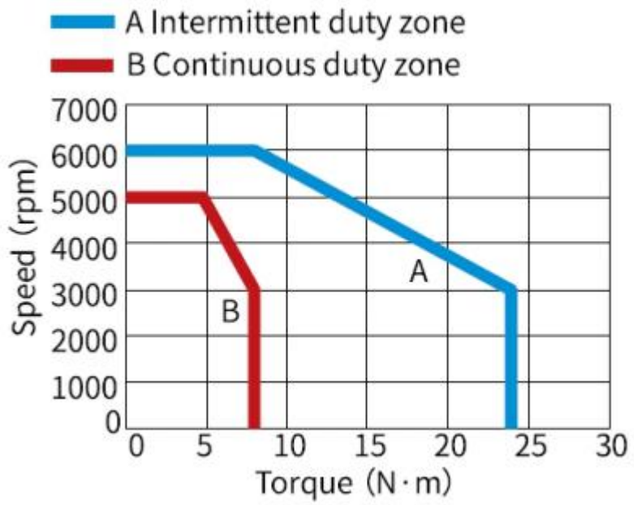




Dimension of shaft end

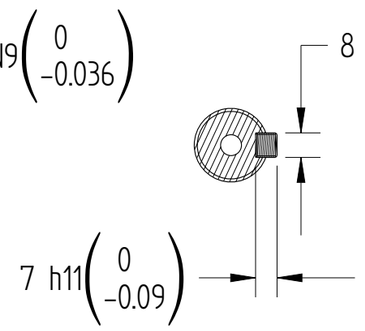

Dimension of shaft end with key

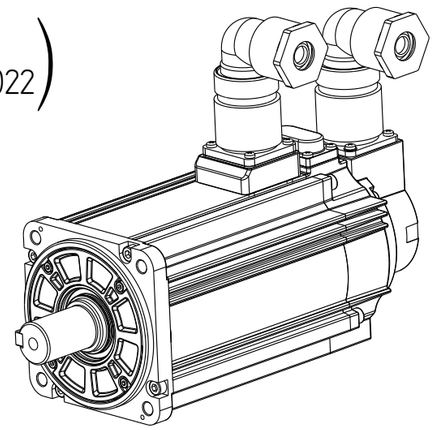

				Motor Outline Drawing	01117926-WX	
B02	Replace	/	/			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			7.35kg	1:2	B02	Model	MS1H2-25C30CB-A334R-INT
Approve	/					

INOVANCE

A3