

正样
2024.11.15

版权所有：侵权必究

外部公开


修订	说明

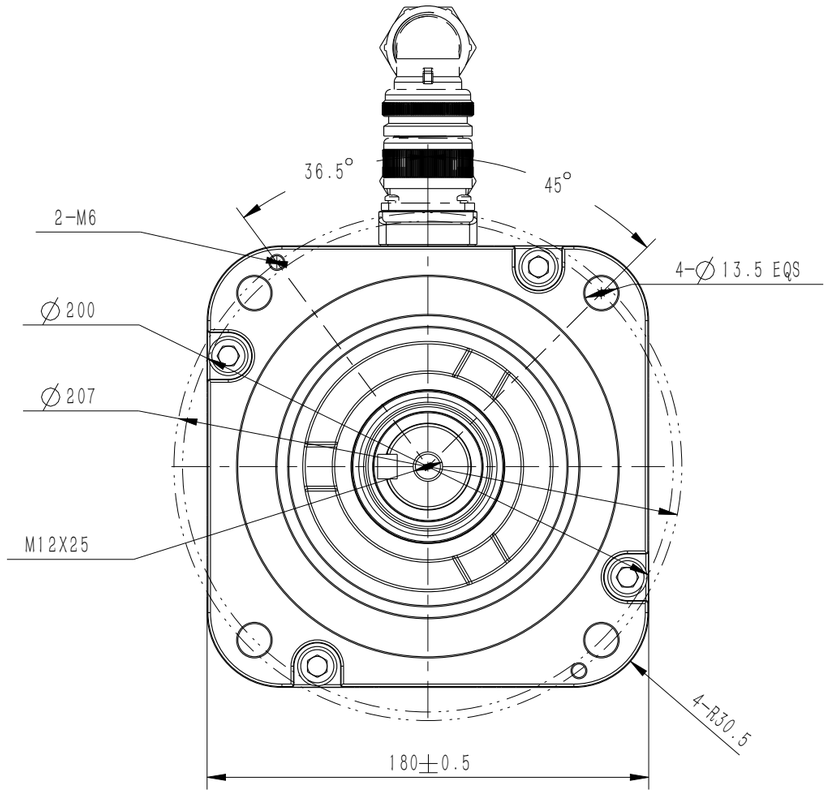


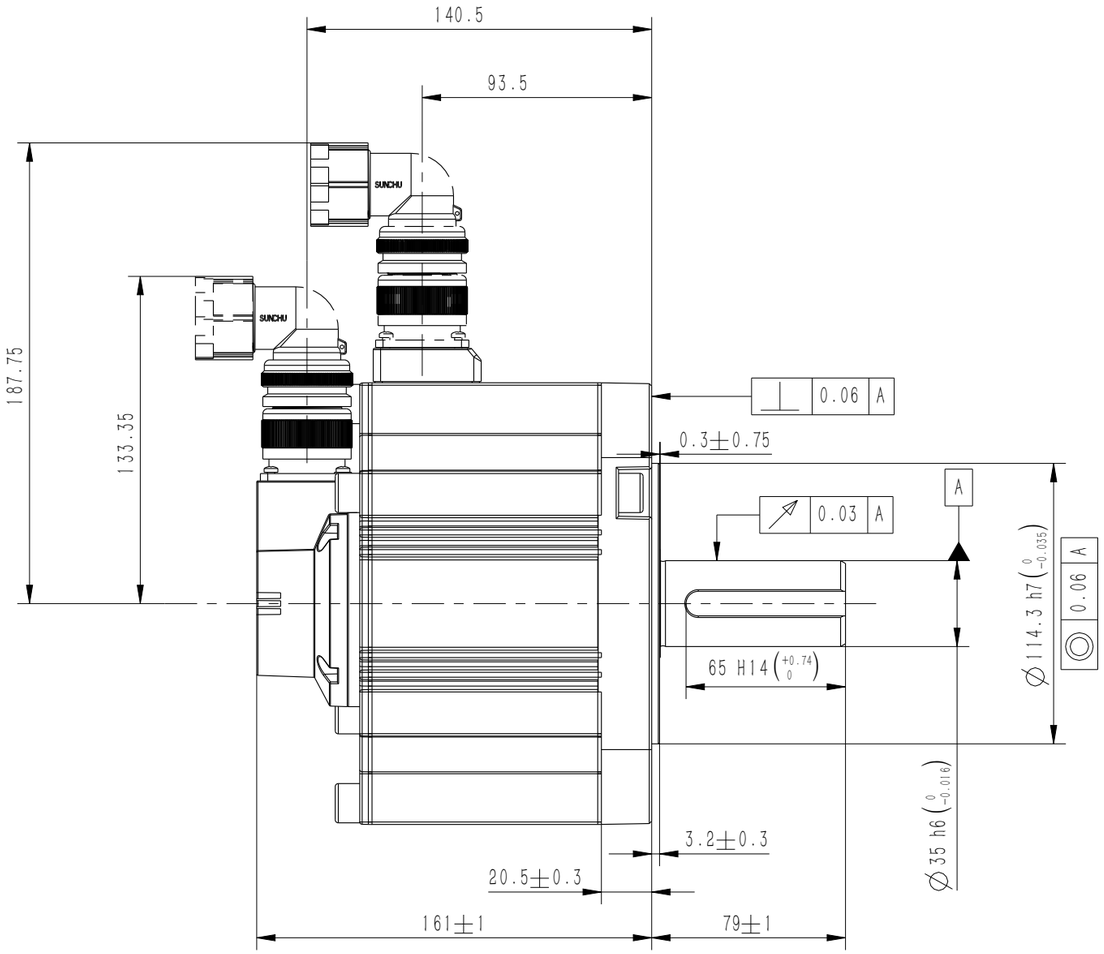


Basic function parameters	
Rated power kW	2.9
Rated voltage V	220
Rated current A	18
Pea current at rated speed A	52.5
Rated torque Nm	18.6
Peak torque at rated speed Nm	46.5
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm^2	44.7± 10%
Encoder resolution	26bit
insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
duty cycle	S1
Radial line load N	⩽1470
Axial load N	⩽490







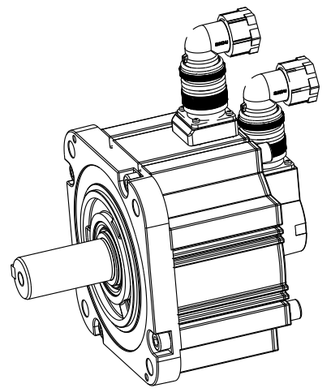

				Motor Outline Drawing	01117967-WX	
B01	New Archive	/	20241112			
Version	Change method	Change by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
standardization	/			13.8kg	2:5	B01
Approve	/					

page 1 of 1

Model MS1H3-29C15CB-A631R-INT

苏州汇川技术有限公司

A3