
正样
2023.10.07
D00


Copyright: Copyright infringement reserved.

外部公开


Amendment	Description


Unit: Millimeter (mm)

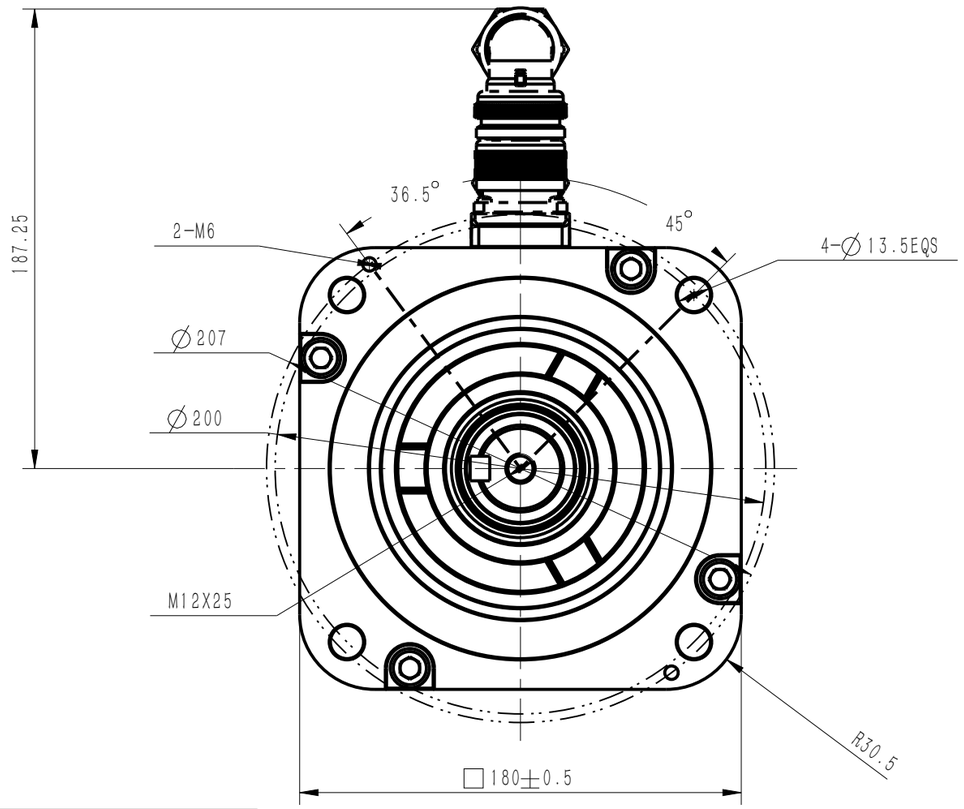

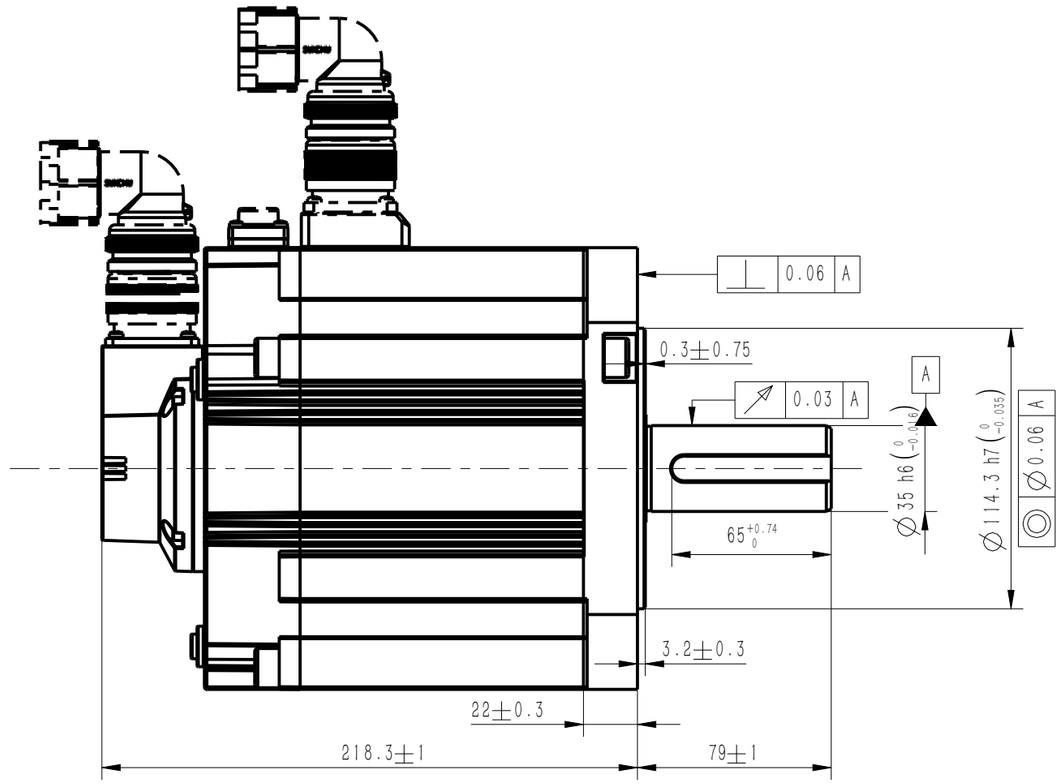


Basic function parameters	
Rated power kW	4.4
Rated voltage V	220
Rated current A	⩽25.5
Pea current at rated speed A	⩽67
Rated torque Nm	28.4
Peak torque at rated speed Nm	71.1
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm^2	72.55
Encoder resolution	26bit
insulation class	F
Protection level	IP67
Static torque of brake Nm	50
Brake power supply	24V(±10%)
duty cycle	S1
Radial line load N	⩽1470
Axial load N	⩽490

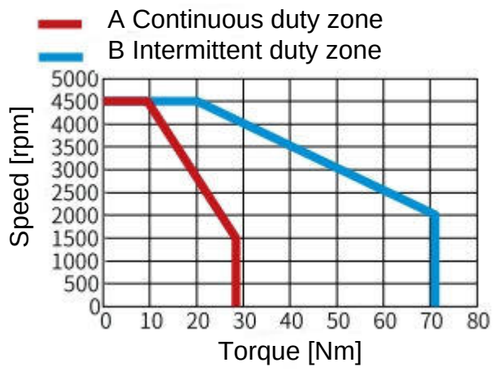




Dimension of shaft end



Dimension of shaft end with key

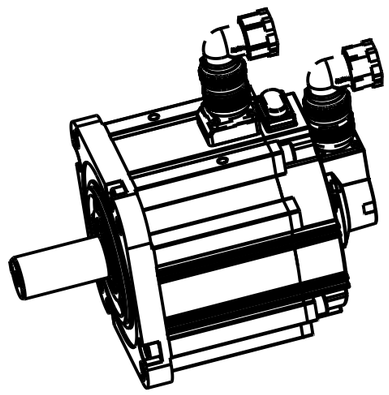

				Motor Outline Drawing	01117970
B00	New Archive	/	20230831		
Version	Change method	Change by	Date		
Design	/			/	Mark
Check	/				
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
tandardizatio	/			21.6 kg / 2:5 / B00	Model MS1H3-44C15CB-A634R-INT
Approve	/				

INOVANCE

A3