
正样
2024.11.15
B01


版权所有：侵权必究

外部公开


Amendment	Description


Unit: Millimeter (mm)

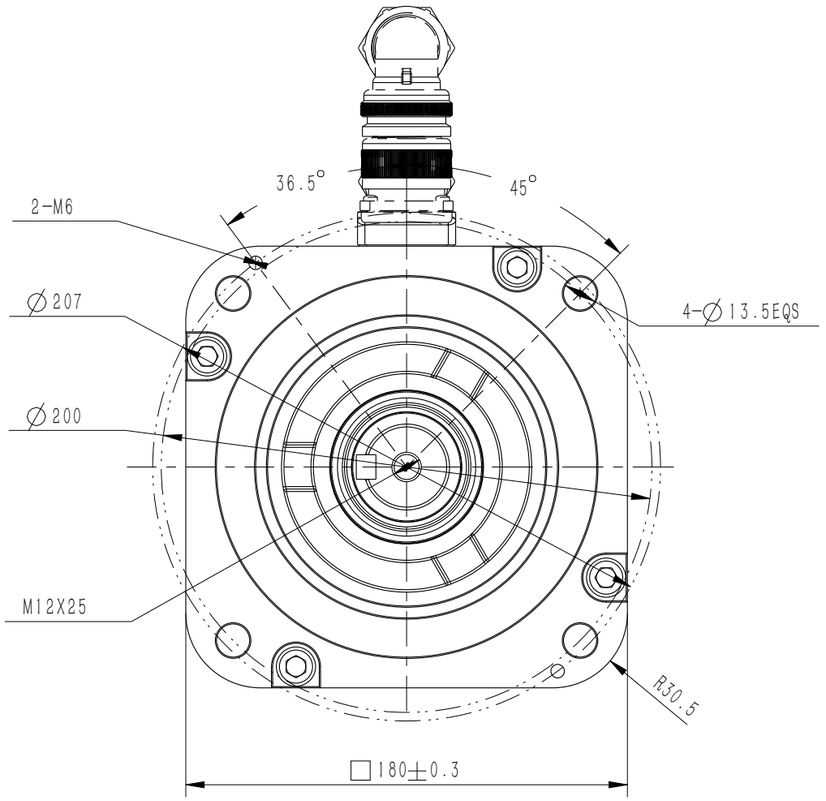

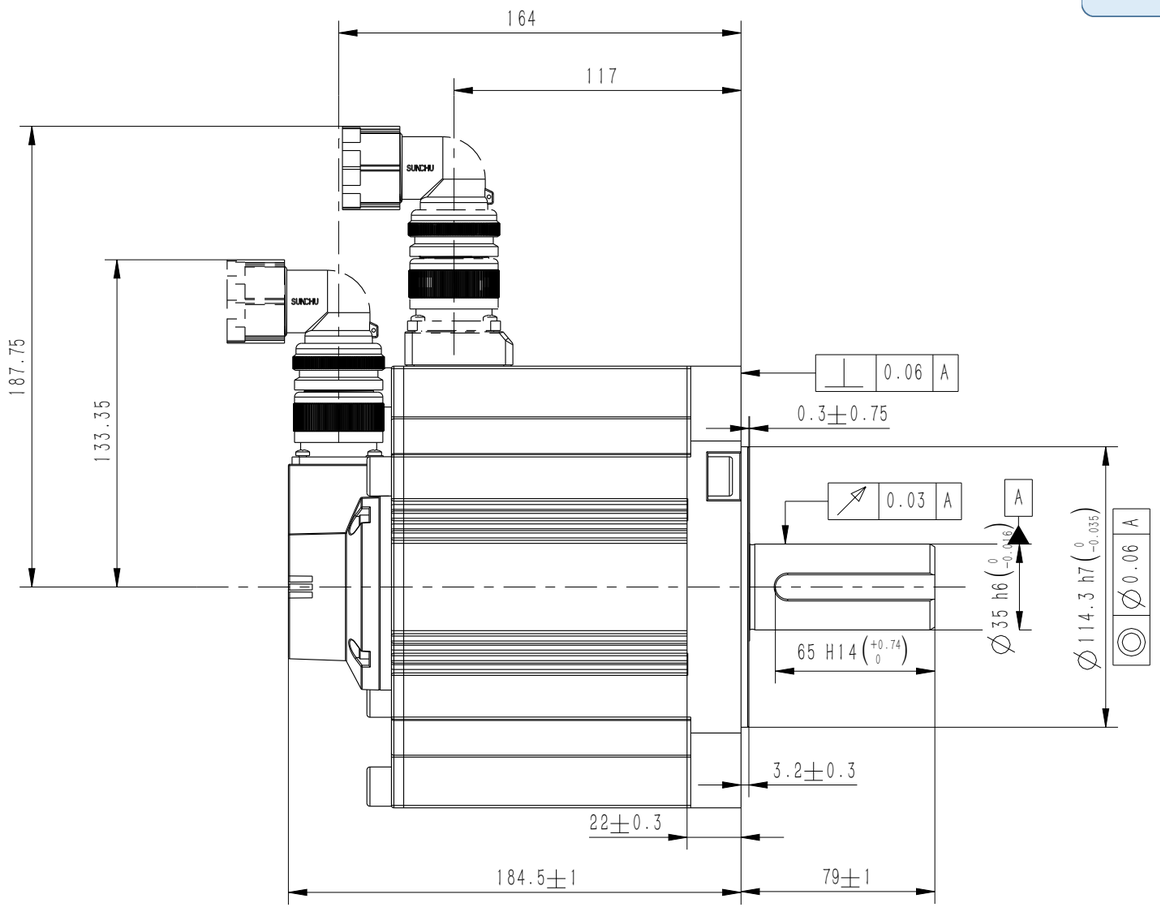


Basic function parameters	
Rated power kW	4.4
Rated voltage V	220
Rated current A	25.5
Pea current at rated speed A	67
Rated torque Nm	28.4
Peak torque at rated speed Nm	71.1
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm^2	64.9± 10%
Encoder resolution	26bit
insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
duty cycle	S1
Radial line load N	≤1470
Axial load N	≤490

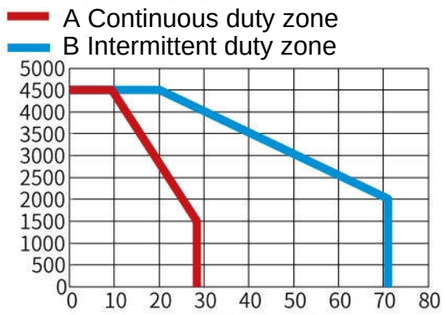




Dimension of shaft end



Dimension of shaft end with key

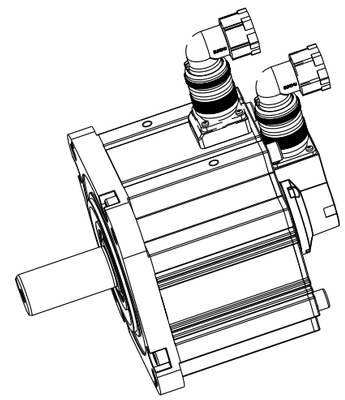

B01	New Archive	/	20241112
Version	Change method	Change by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
standardization	/		
Approve	/		

Motor Outline Drawing			01117982-WX
/			Mark
Weight	Scale	Version	Page 1 of 1
17.4kg	2:5	B01	Model MS1H3-44C15CB-A631R-INT

苏州汇川技术有限公司

A3