

正样
2023.10.07
B00
版权所有：侵权必究

外部公开


Amendment	Description


Unit: Millimeter (mm)

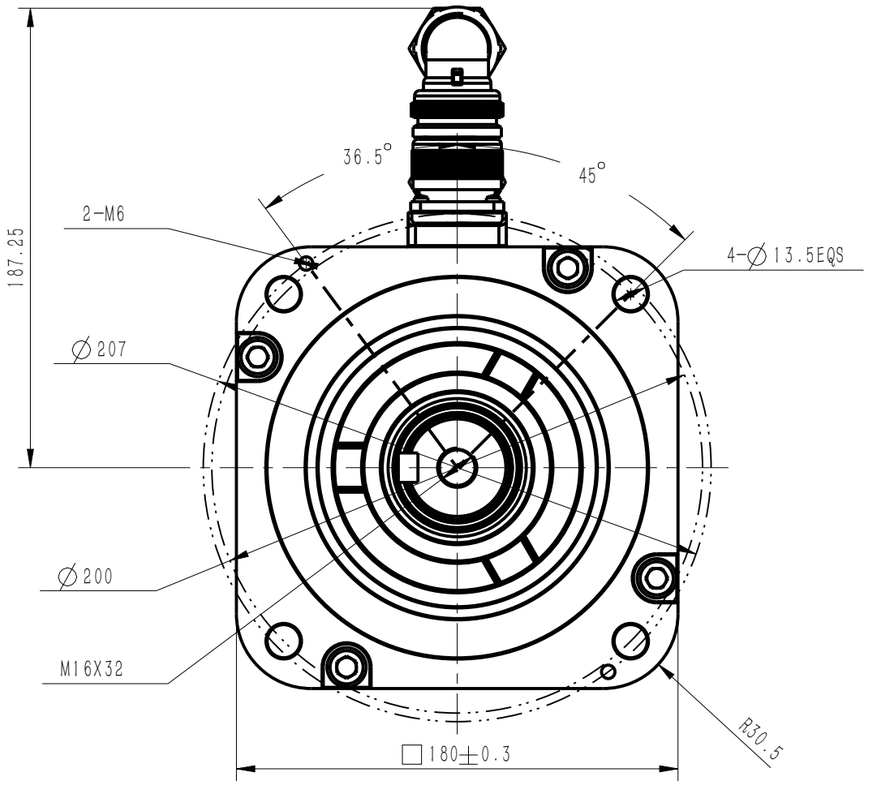

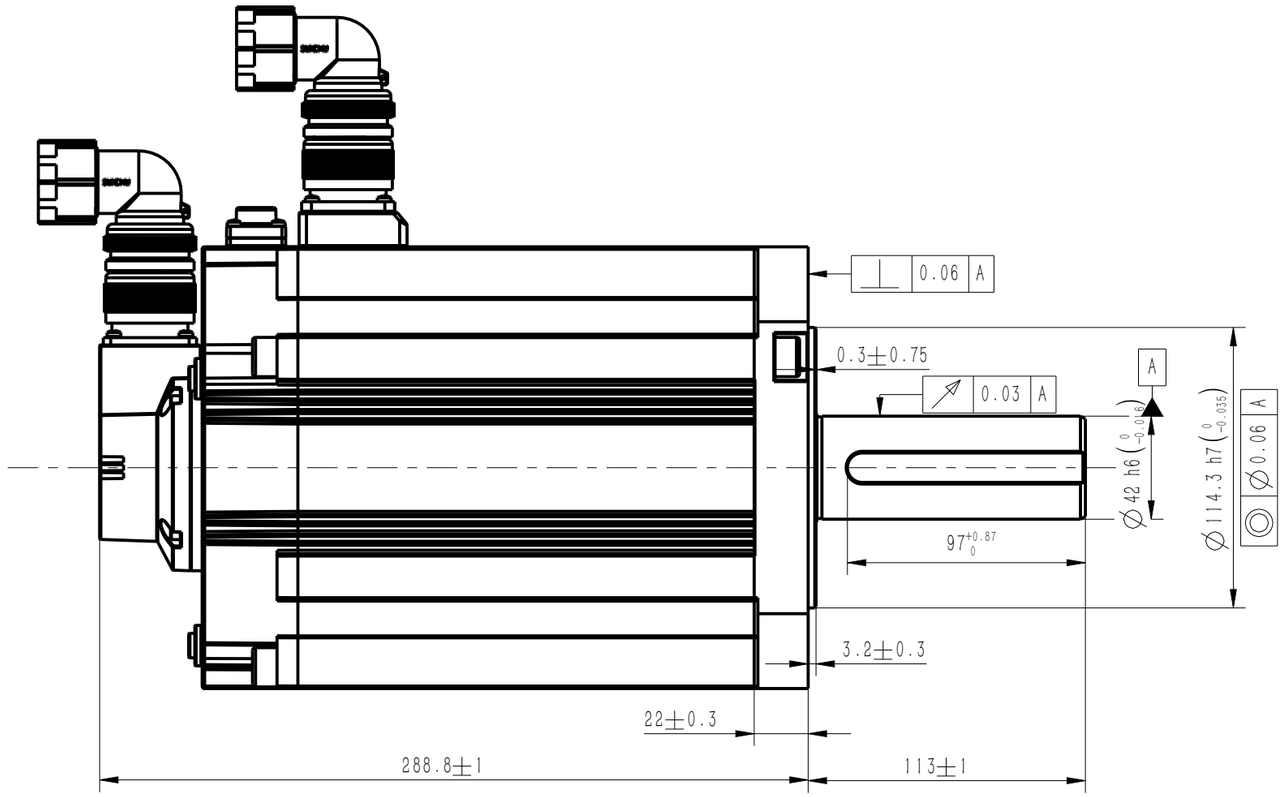


Basic function parameters	
Rated power kW	7.5
Rated voltage V	380
Rated current A	⩽25
Pea current at rated speed A	⩽65
Rated torque Nm	48
Peak torque at rated speed Nm	119
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm^2	135.15
Encoder resolution	26bit
insulation class	F
Protection level	IP67
Static torque of brake Nm	50
Brake power supply V	24(±10%)
duty cycle	S1
Radial line load N	⩽1764
Axial load N	⩽588

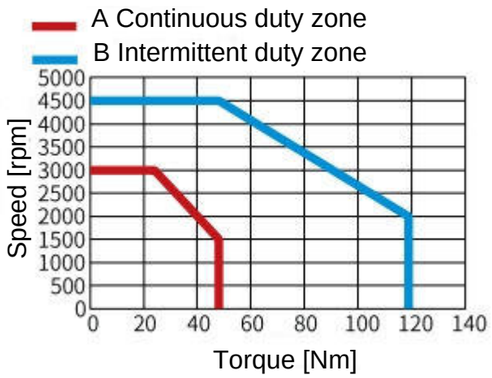




Dimension of shaft end



Dimension of shaft end with key

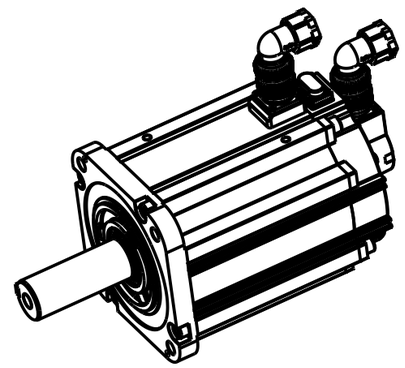

				Motor Outline Drawing	01117985-WX
B00	New Archive	/	20230901		
Version	Change method	Change by	Date		
Design	/			/	Mark
Check	/				INOVANCE
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
Standardization	/			33.2 kg / 2:5 / B00	Model MS1H3-75C15CD-A634R-INT
Approve	/				

苏州汇川技术有限公司

A3