
正样
2023.09.25
B00


Amendment	Description


外部公开

Copyright:Copyright infringement reserved.

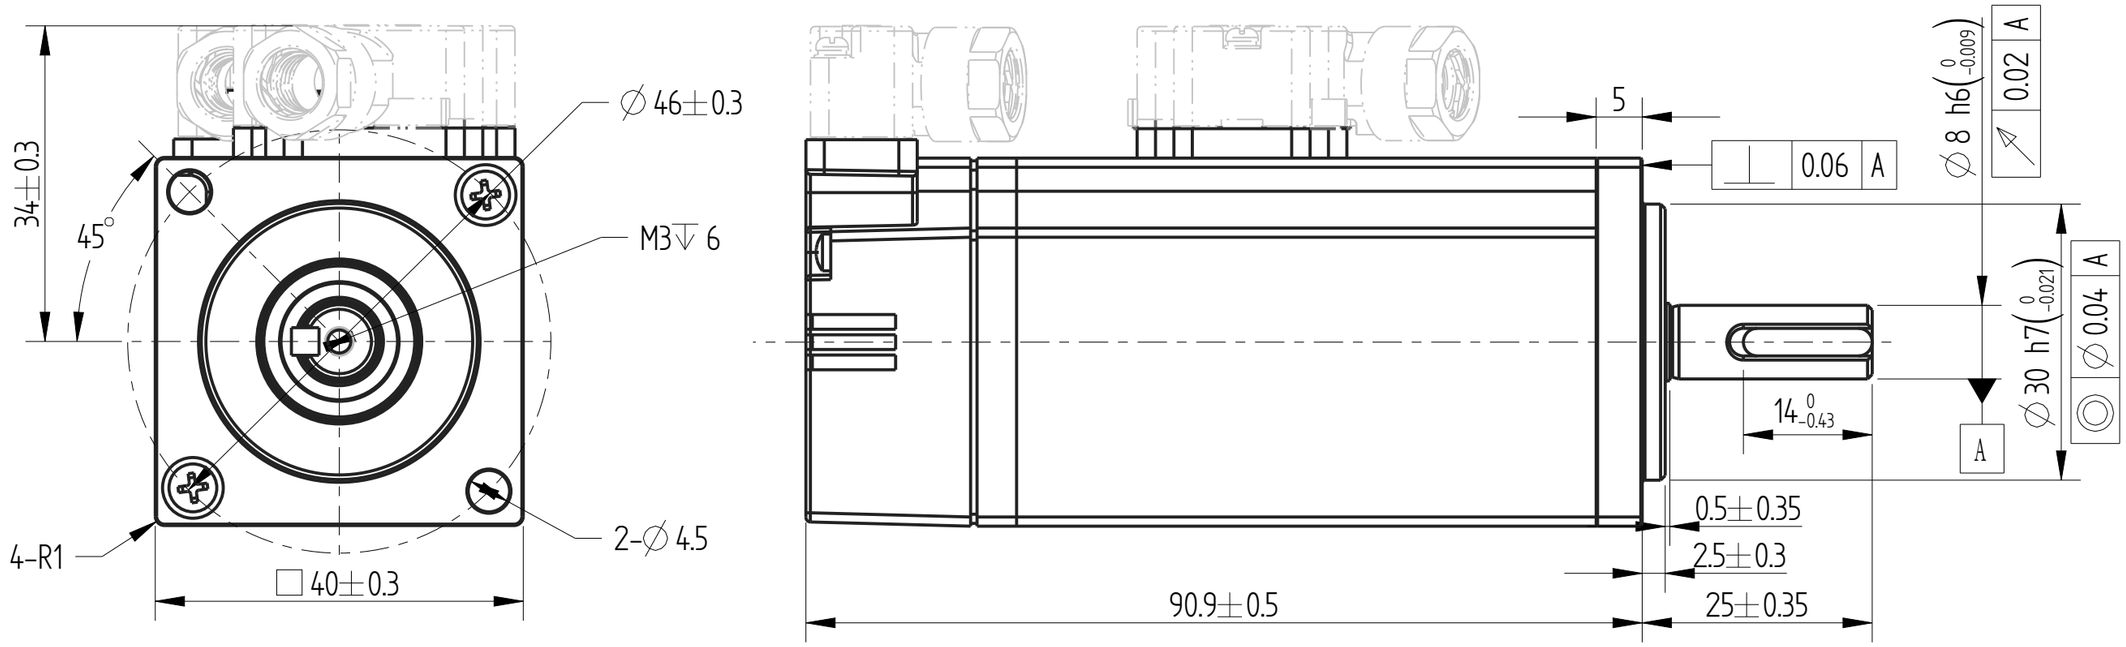


Basic function parameters	
Rated power KW	0.1
Rated voltage V	220
Rated current A	⩽1.3
Peak current at rated speed A	⩽4.7
Rated torque Nm	0.32
Peak torque at rated speed Nm	1.12
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.102
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	⩽78
Axial load N	⩽54

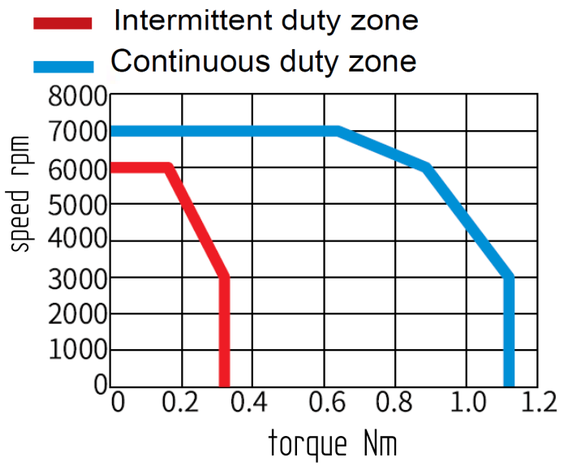

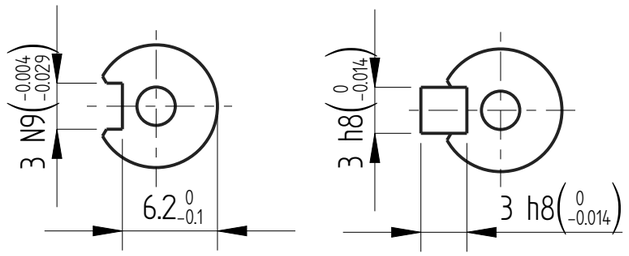

Dimension of shaft end Dimension of shaft end with key

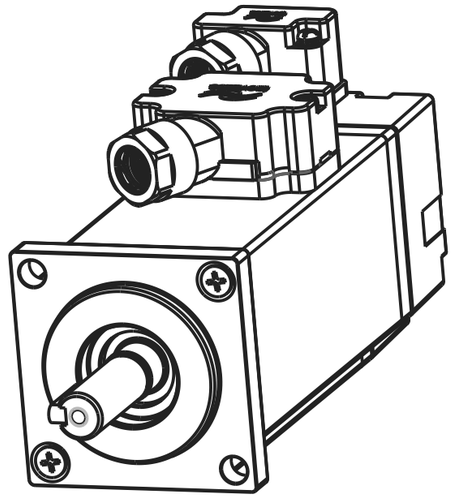

				Motor outline drawing		01118103-WX
B00	New Archive	/	20230907			
Version	Change method	Change by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			/	1:1	B00	Model	MS1H4-10B30CB-S630Z-INT
Approve	/					

INOVANCE

A3