
正样
2024.12.23
B01


Copyright: Copyright infringement reserved


Amendment	Description

外部公开


Unit: Millimeter (mm)

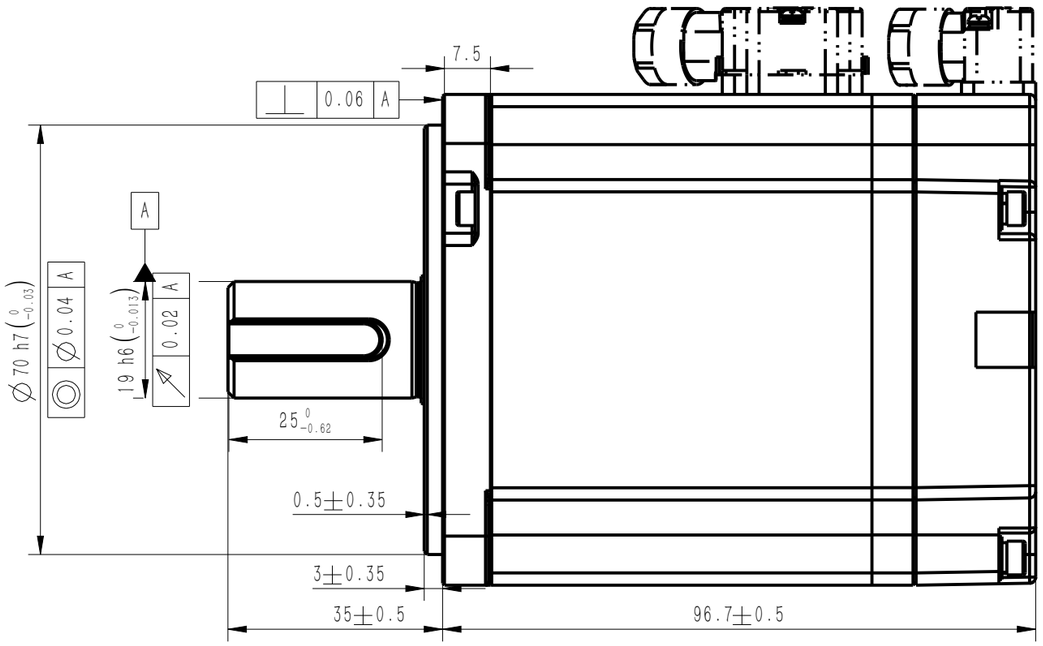

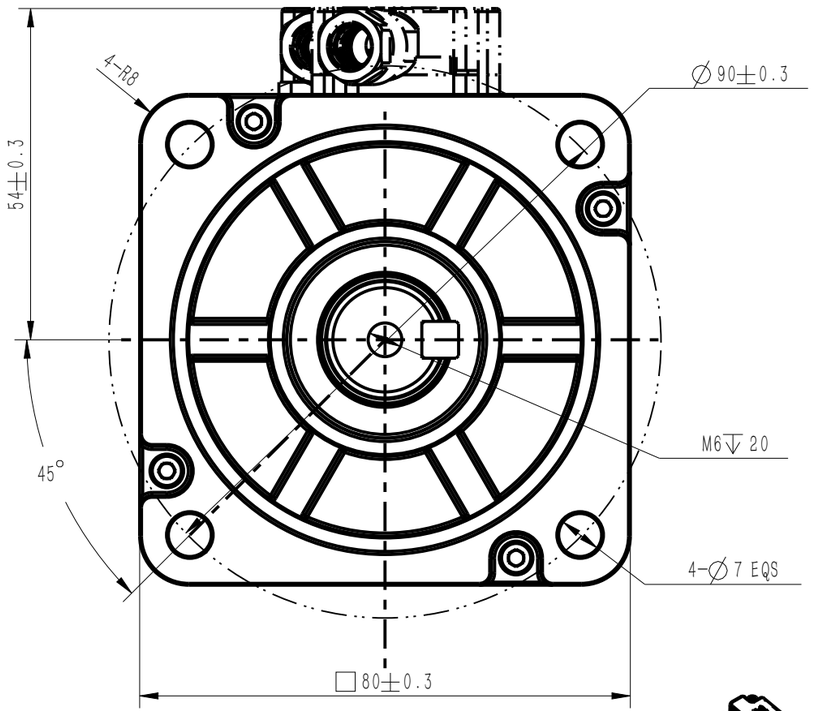


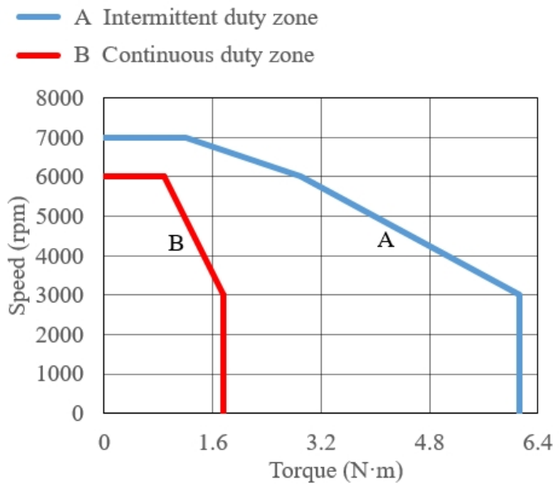


Basic function parameters	
Rated power KW	0.55
Rated voltage V	220
Rated current A	3.3
Peak current at rated speed A	13.2
Rated torque Nm	1.75
Peak torque at rated speed Nm	6.13
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.12±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Brake backlash°	/
Duty cycle	S1
Radial line load N	≤392
Axial load N	≤147



Dimension of shaft end



Dimension of shaft end with key

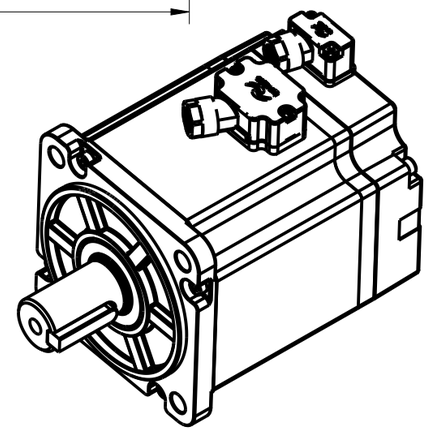

				Motor Outline Drawing	01118107-WX
B01	New Archive	/	20240930		
Version	Change method	Changed by	Date		
Design	/			/	Mark INOVANCE
Check	/				
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
Standardization	/			1.85kg / 1:1 / B01	Model MS1H4-55B30CB-S631R-INT
Approve	/				

INOVANCE

A3