

正样
2024.12.23
B01

Amendment	Description


外部公开


Unit: Millimeter (mm)

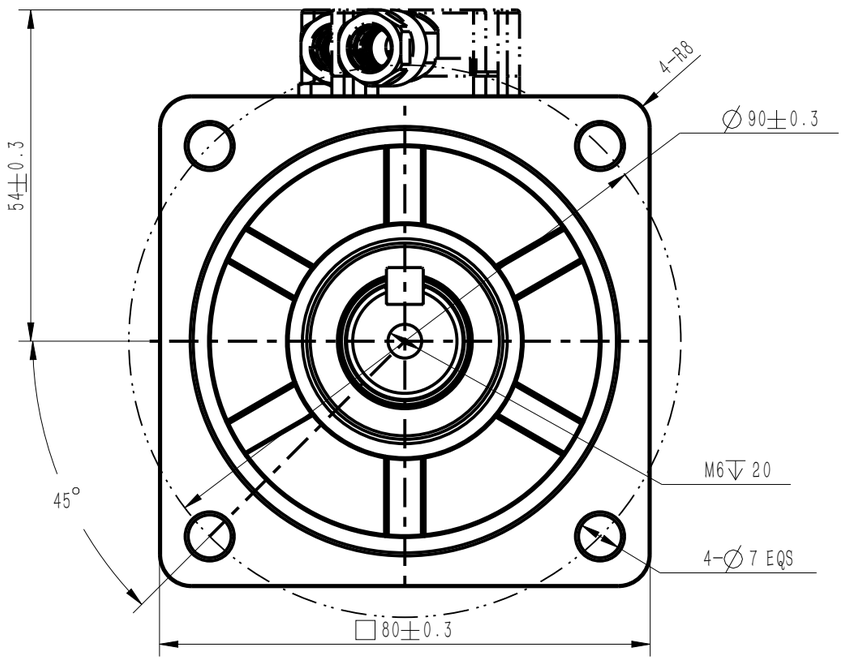

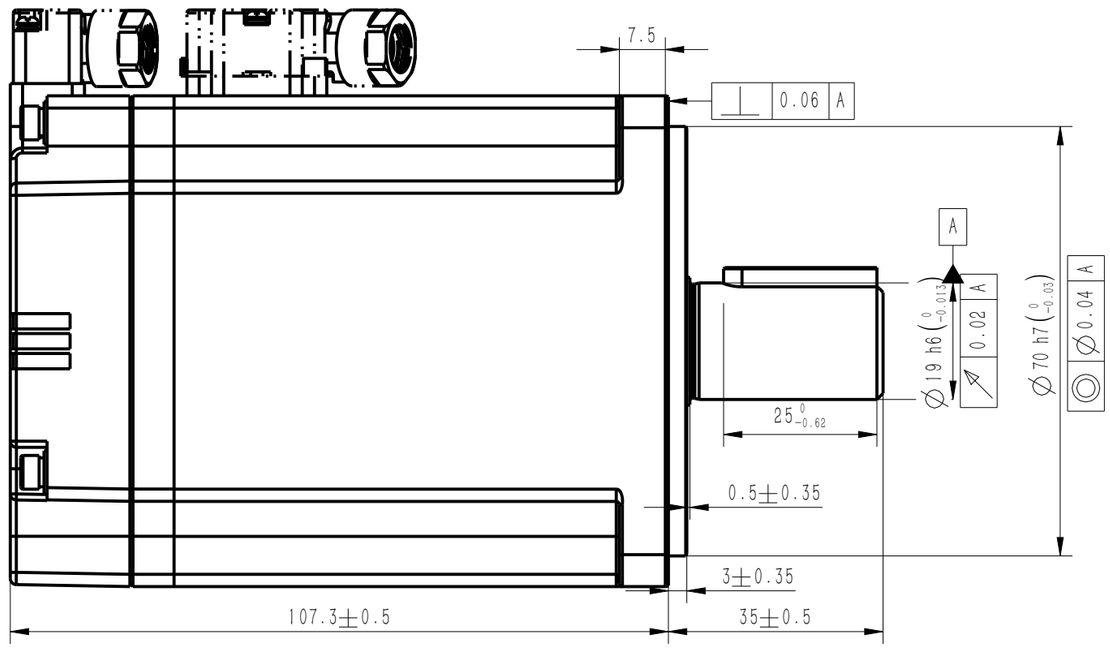


Basic function parameters	
Rated power KW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.46±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Brake backlash°	/
Duty cycle	S1
Radial line load N	≤392
Axial load N	≤147

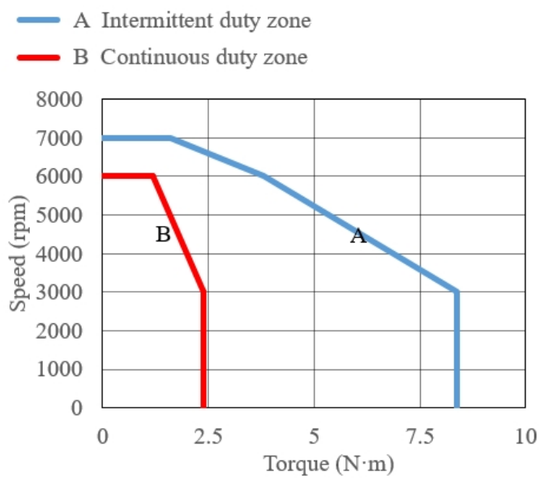




Dimension of shaft end



Dimension of shaft end with key

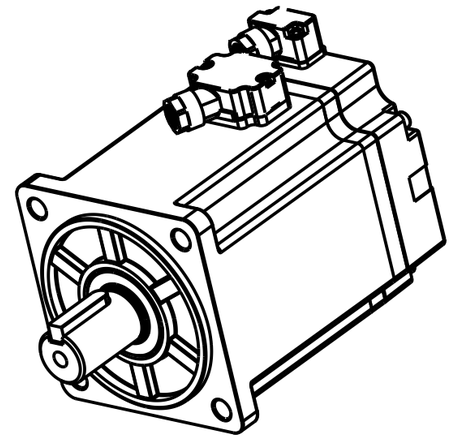

				Motor Outline Drawing	01118108-WX	
B01	New Archive	/	20240930			
Version	Change method	Changed by	Date			
Design	/				Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.18kg	1:1	B01
Approve	/					

Page 1 of 1		
Model	MS1H4-75B30CB-S631R-INT	

Copyright: Copyright infringement reserved.

INOVANCE

A3