
正样
2024.12.23
B01


Copyright: Copyright infringement reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

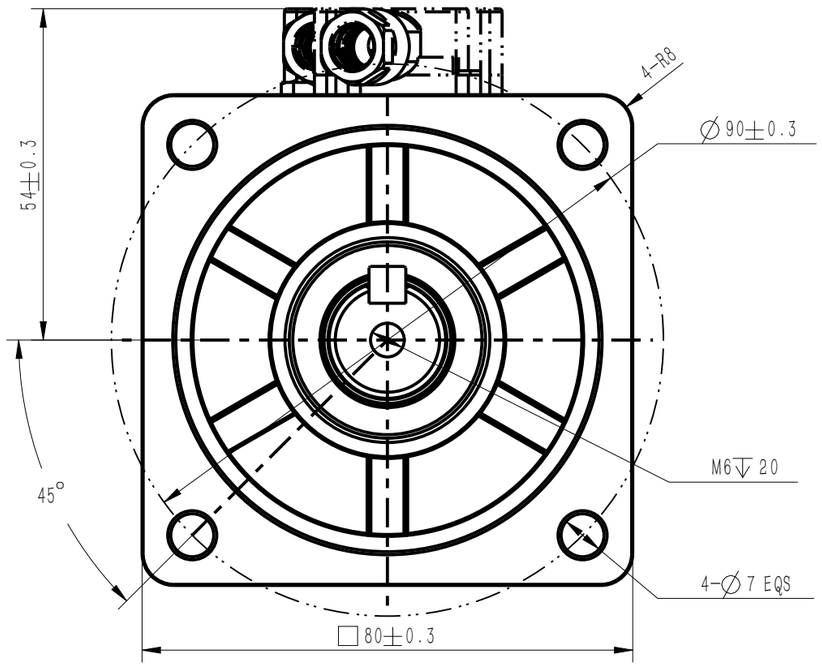

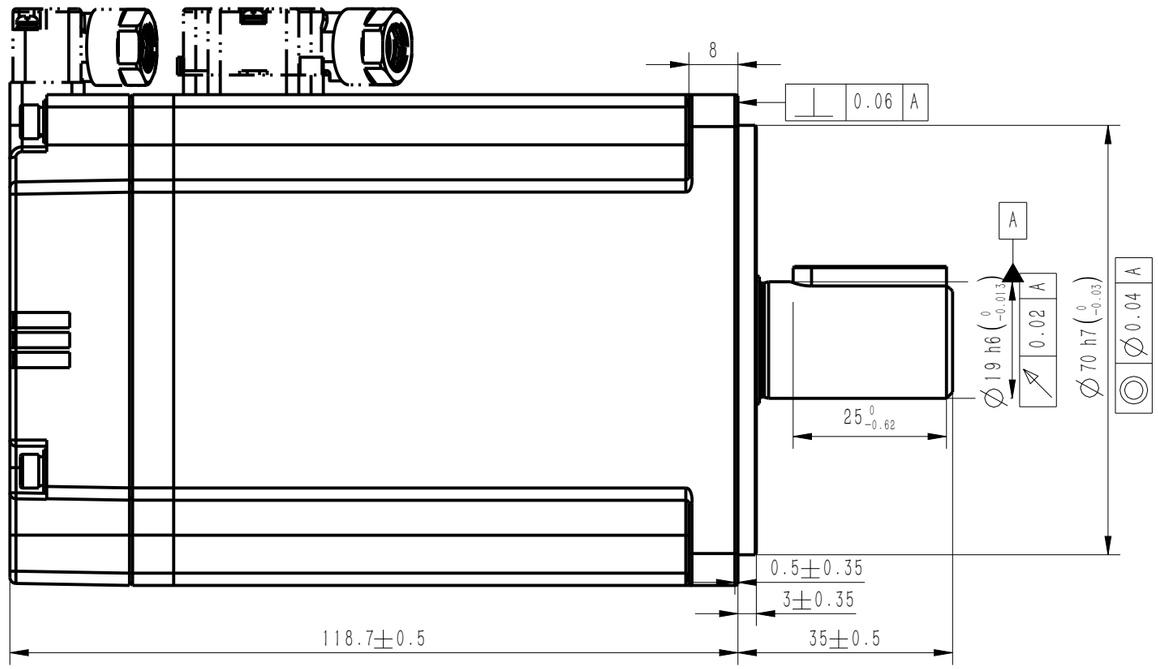


Basic function parameters	
Rated power kW	1
Rated voltage V	220
Rated current A	6.5
Peak current at rated speed A	24
Rated torque Nm	3.18
Peak torque at rated speed Nm	11.1
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	1.87±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Brake backlash°	/
Duty cycle	S1
Radial line load N	≤392
Axial load N	≤147

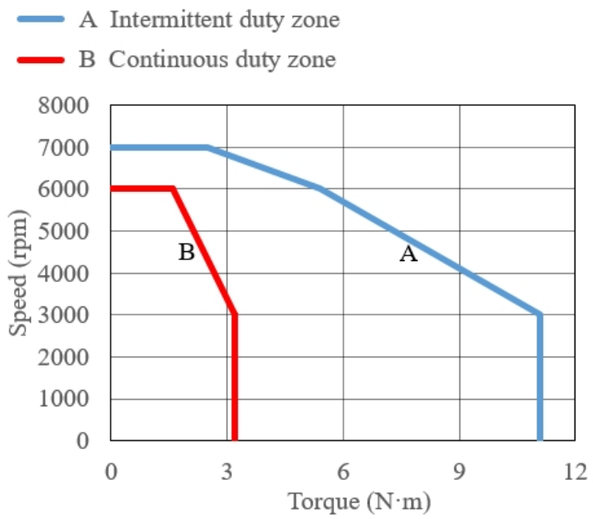




Dimension of shaft end



Dimension of shaft end with key

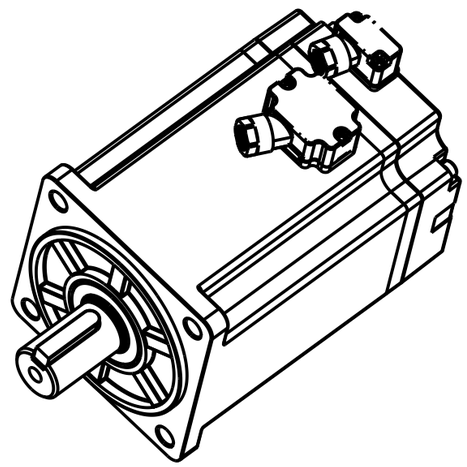

				Motor Outline Drawing	01118109-WX
B01	New Archive	/	20241121		
Version	Change method	Changed by	Date		
Design	/			/	Mark INOVANCE
Check	/				
Craft	/				
Verify	/			Weight / Scale / Version	Page 1 of 1
Standardization	/			2.55kg / 1:1 / B01	Model MS1H4-10C30CB-S631R-INT
Approve	/				

INOVANCE

A3