
正样
2024.08.28
B01


Amendment	Description


Unit: Millimeter (mm)


外部公开

Copyright:Copyright infringement reserved.

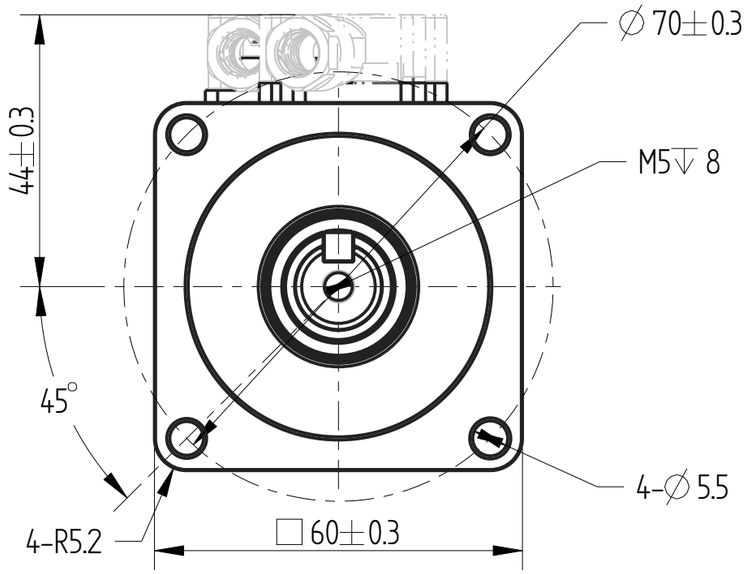


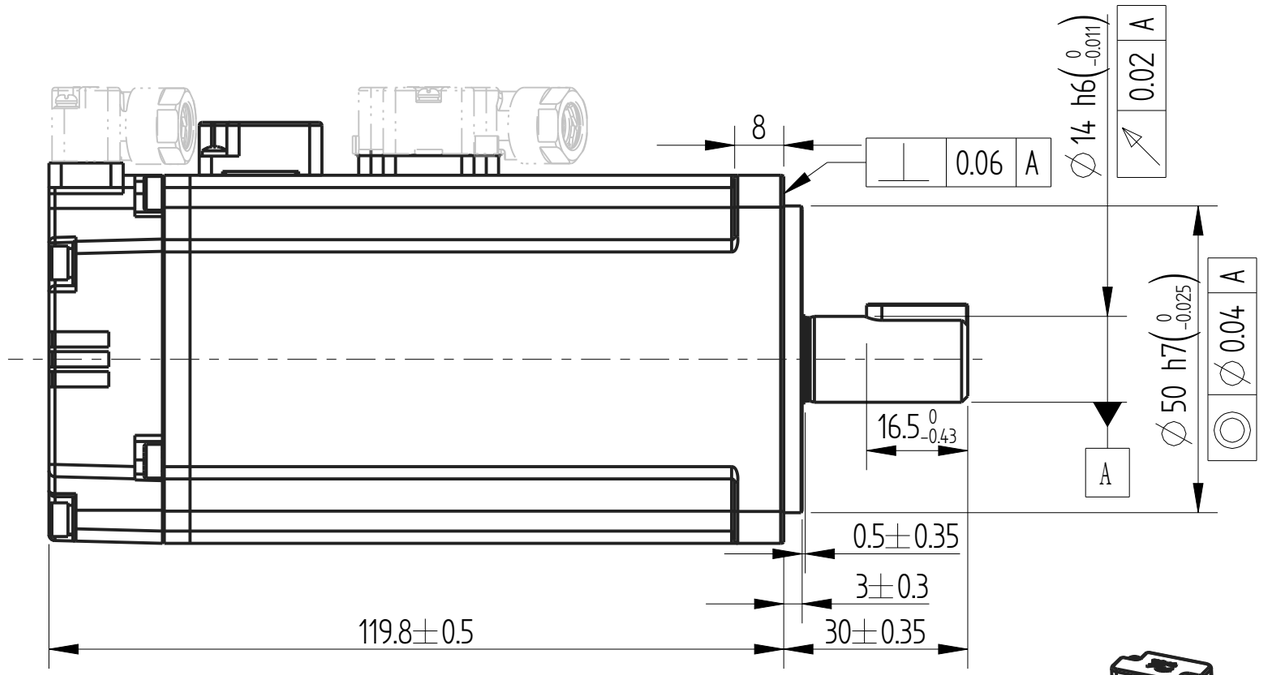

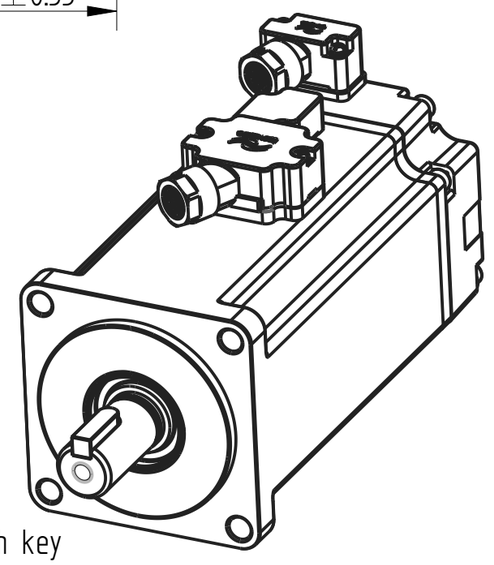




Dimension of shaft end



Dimension of shaft end with key

Basic function parameters	
Rated power KW	0.4
Rated voltage V	220
Rated current A	2.4
Peak current at rated speed A	9.2
Rated torque Nm	1.27
Peak torque at rated speed Nm	4.46
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.44±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾1.5
Brake power supply V	DC24±10%
Duty cycle	S1
Radial line load N	⩽245
Axial load N	⩽74

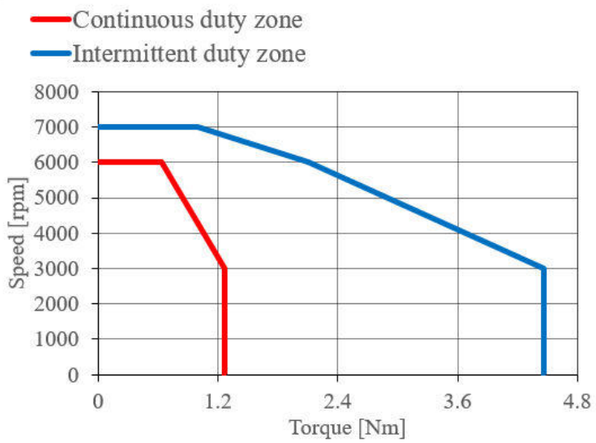

B01	replace	/	20240809
B00	New Archive	/	20230822
Version	Change method	Change by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor outline drawing

01118111-WX

/

Mark

INOVANCE

Weight	Scale	Version	
			Page 1 of 1
1.48kg	1:1	B01	Model: MS1H4-40B30CB-S634R-INT

INOVANCE

A3