

正样
2023.10.09
200


Copyright: Copyright infringement reserved.

Amendment	Description


Unit: Millimeter (mm)

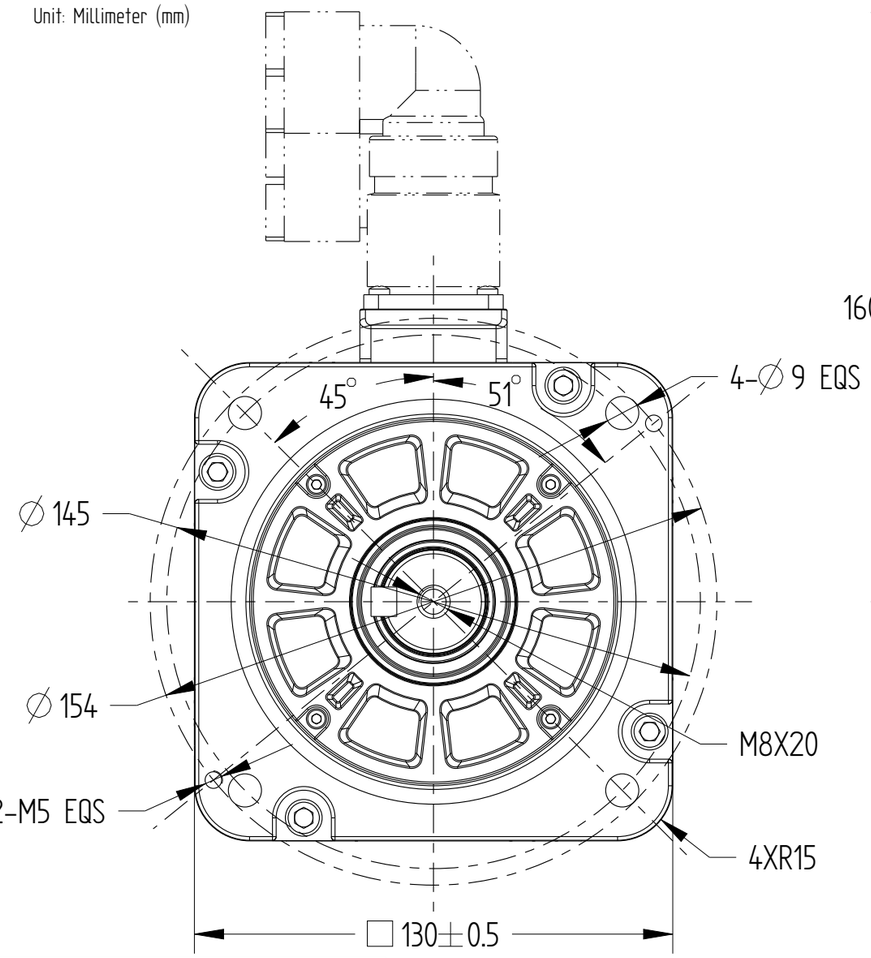

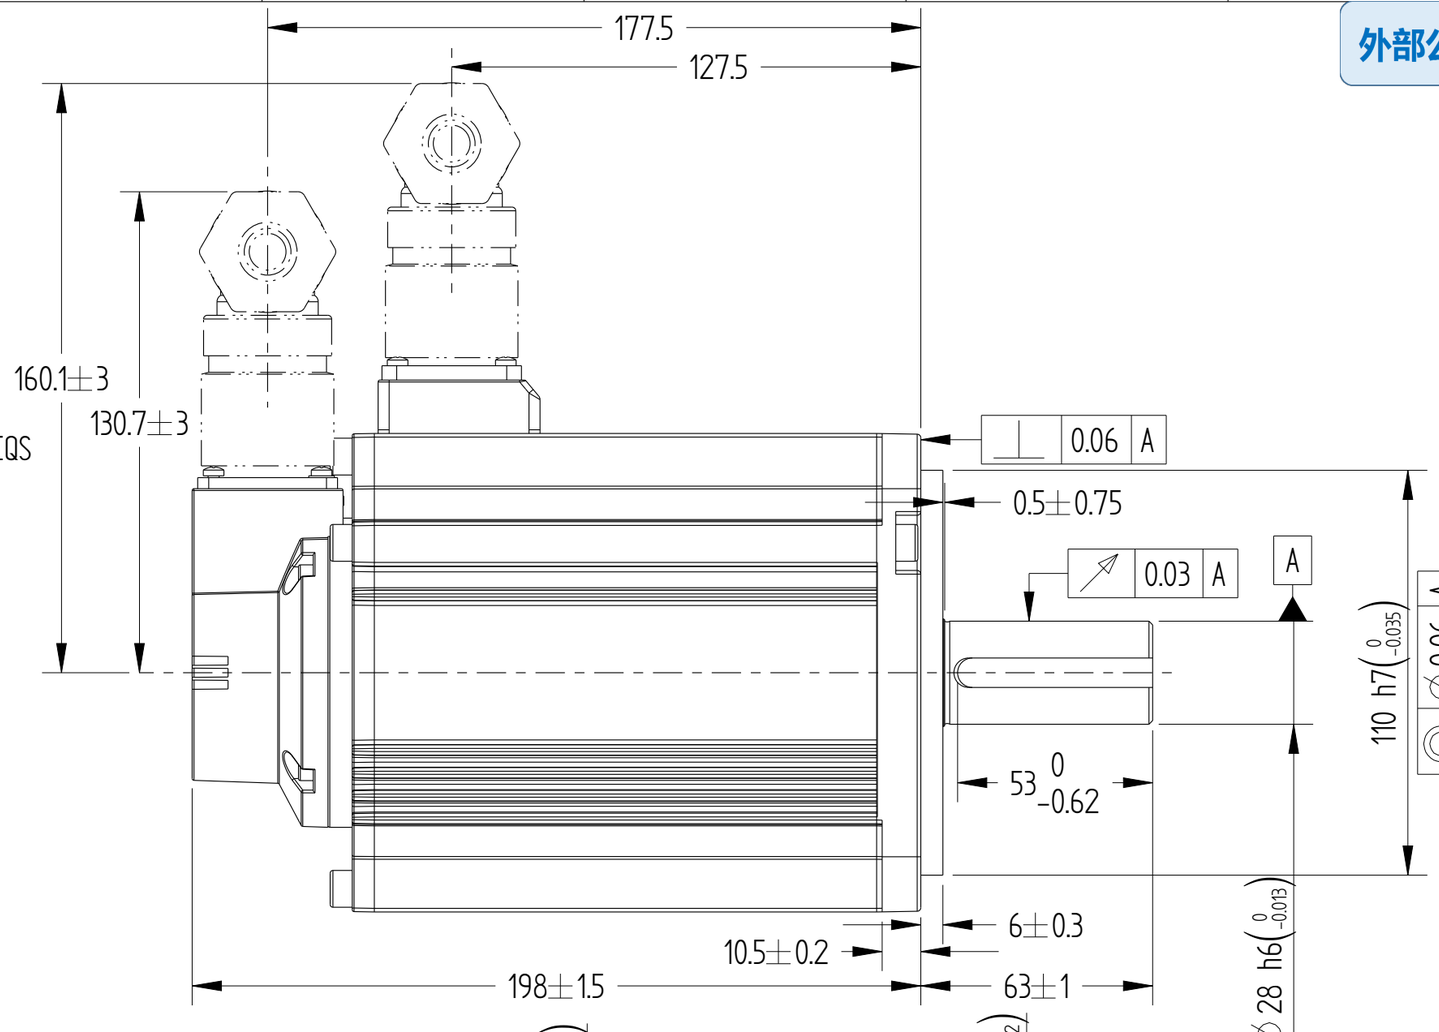





Dimension of shaft end
4:5

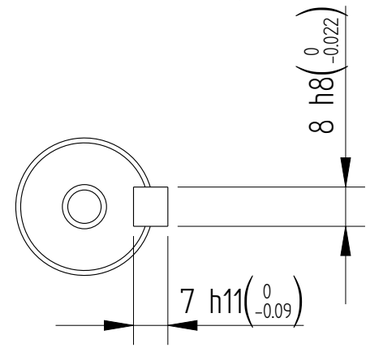

Dimension of shaft end with key
4:5



Basic function parameters	
Rated power KW	3
Rated voltage V	380
Rated current A	⩽8.9
Peak current at rated speed A	⩽29
Rated torque Nm	9.8
Peak torque at rated speed Nm	29.4
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	6.4±10%
Encoder resolution	26bit
Insulation class	F(155℃)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	⩽1176
Axial load N	⩽392

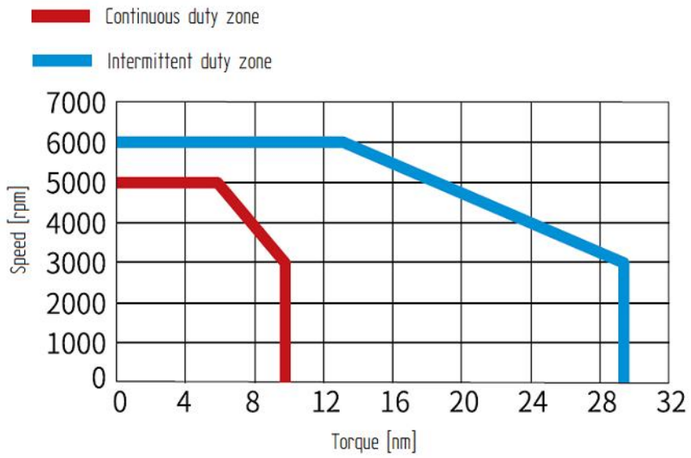

B00	New Archive	/	20230904
Version	Change method	Changed by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor Outline Drawing

01118124-WX

/

Mark

INOVANCE

Weight	Scale	Version	Page 1 of 1
10kg	3:5	B00	Model: MS1H2-30C30□B-S631R-INT

外部公开

INOVANCE

A3