

正样
2024.11.14
001

Copyright: Copyright infringement reserved


Amendment	Description


外部公开

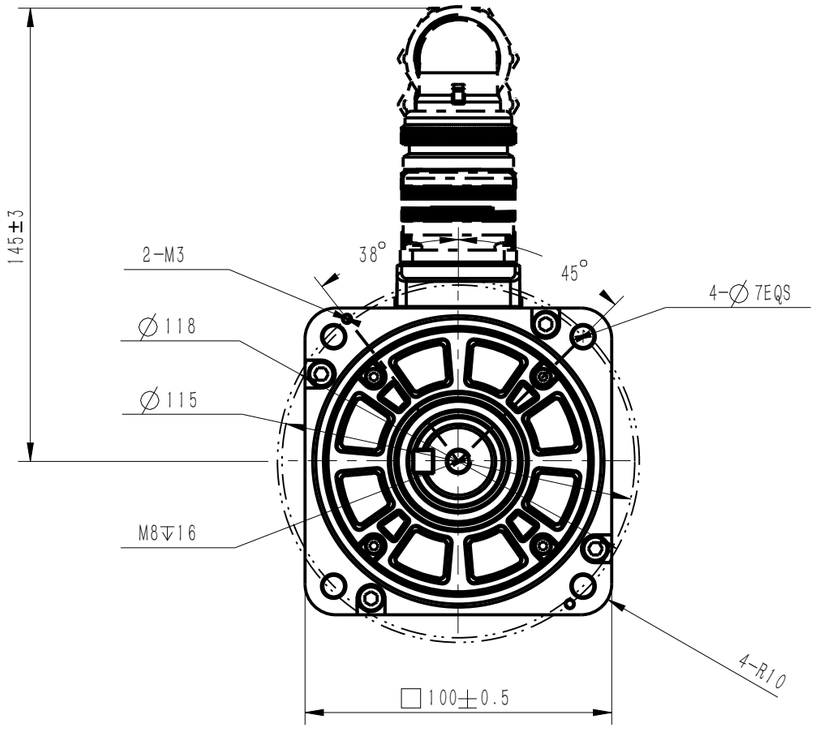

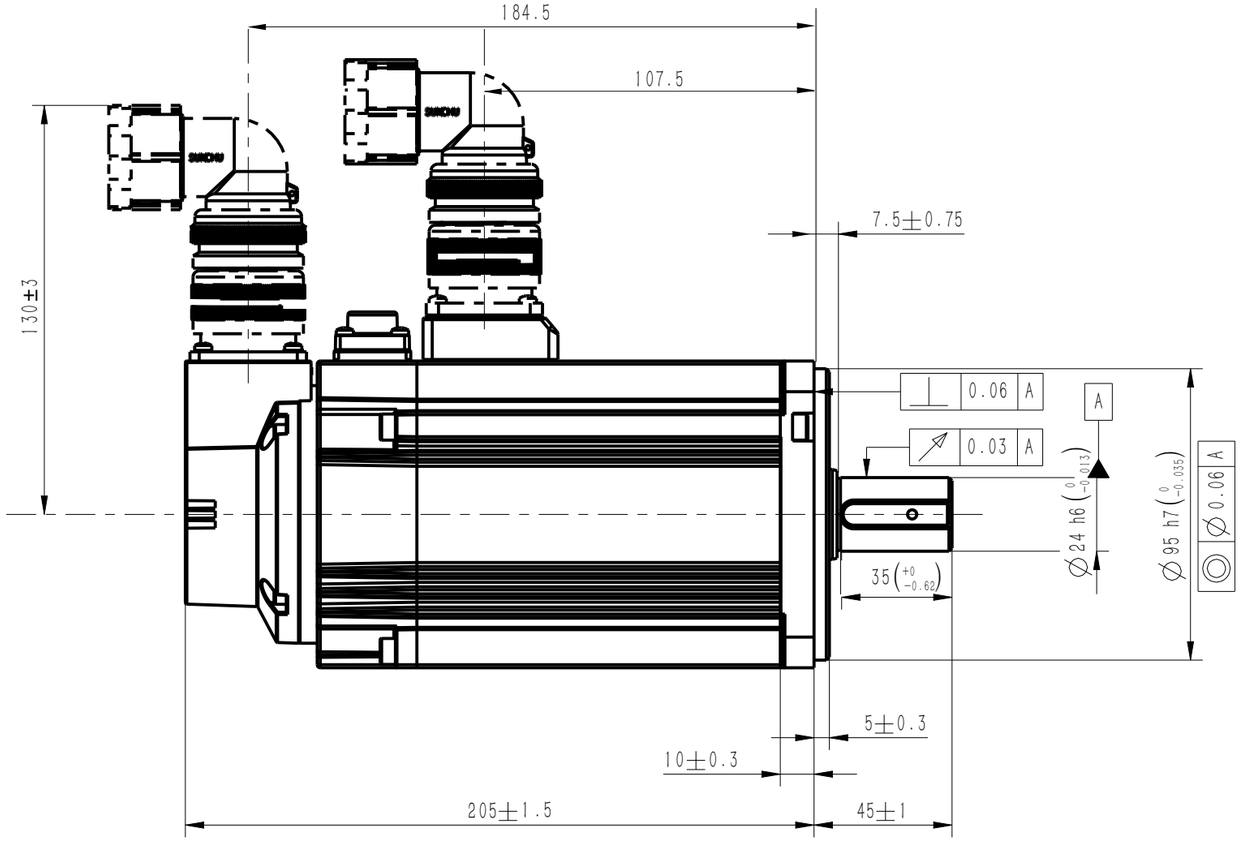


Basic function parameters	
Rated power kW	2.0
Rated voltage V	220
Rated current A	11.3
Peak current at rated speed A	42
Rated torque Nm	6.36
Peak torque at rated speed Nm	19.1
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	3.74± 10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾8
Brake power supply V	DC24± 10%
Brake backlash °	⩽1
Duty cycle	S1
Radial line load N	⩽686
Axial load N	⩽196

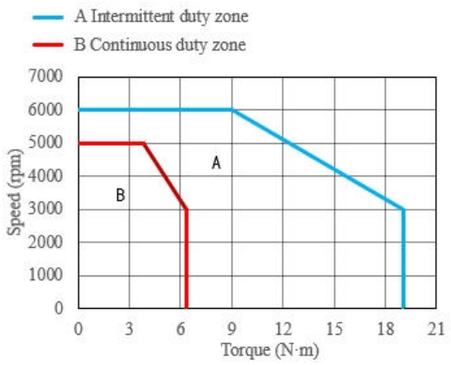




Dimension of shaft end



Dimension of shaft end with key

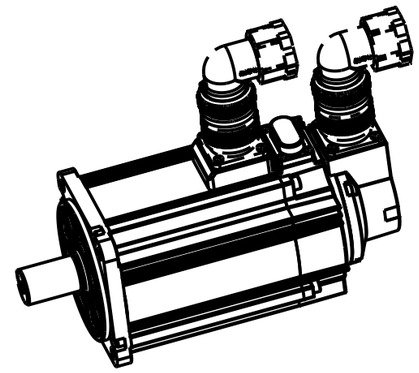

B01	Substitution	/	20240914
Version	Change method	Change by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor Outline Drawing		01118138-WX
/	Mark	INOVANCE
Weight	Scale	Version
/	1:2	B01
Page 1 of 1		
Model	MS1H2-20C30CB-S634R-INT	

INOVANCE

A3