

正样
2024.11.15
B01
版权所有：侵权必究

Amendment	Description


外部公开


Unit: Millimeter (mm)

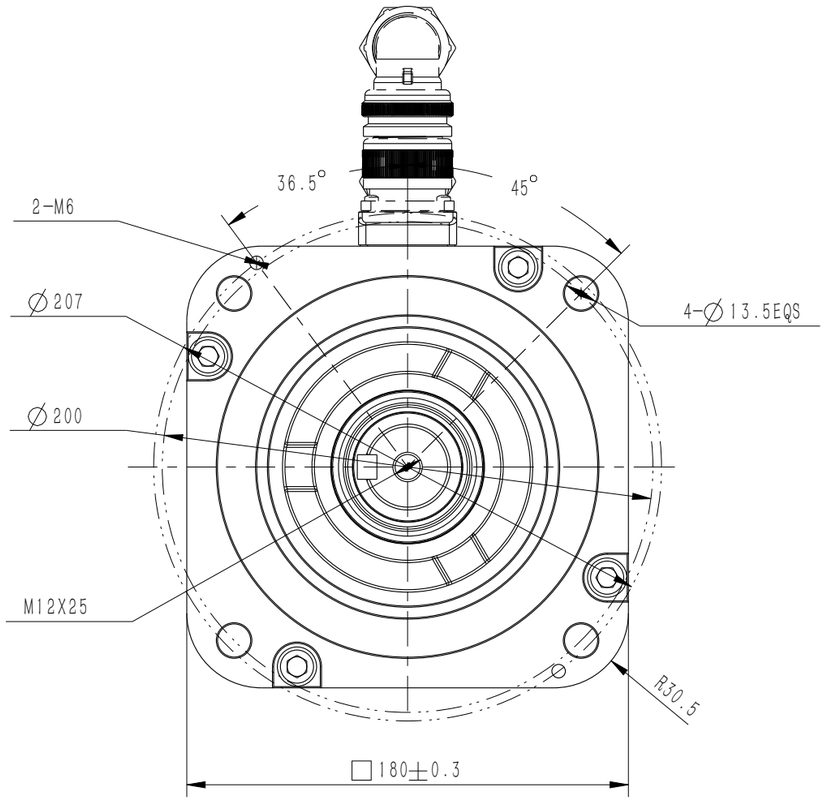

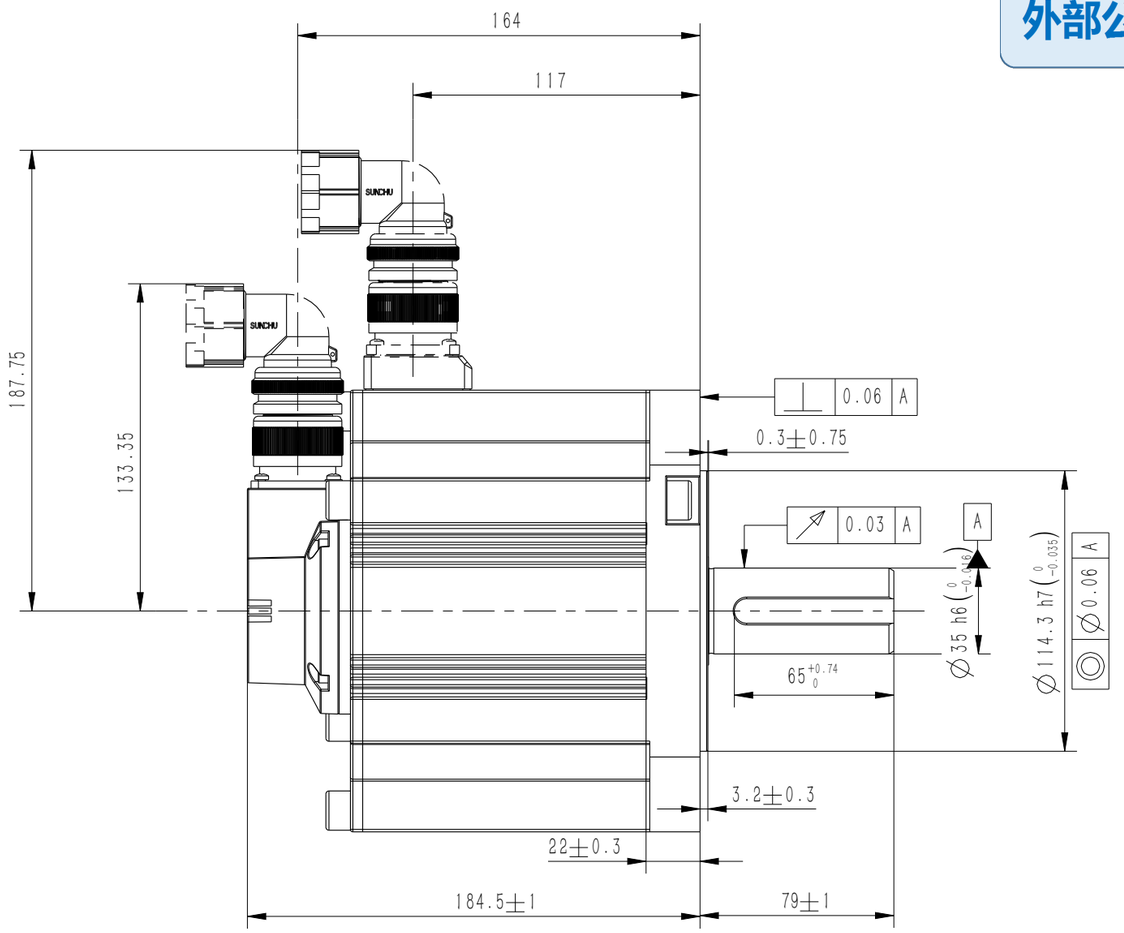


Basic function parameters	
Rated power kW	4.4
Rated voltage V	220
Rated current A	25.5
Pea current at rated speed A	67
Rated torque Nm	28.4
Peak torque at rated speed Nm	71.1
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm^2	64.9± 10%
Encoder resolution	26bit
insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
duty cycle	S1
Radial line load N	≤1470
Axial load N	≤490

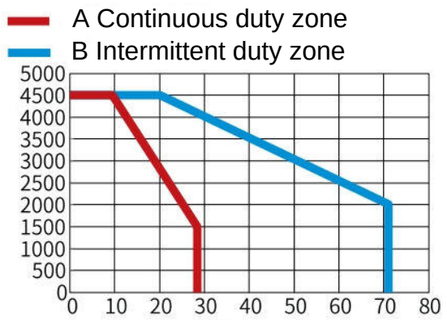




Dimension of shaft end



Dimension of shaft end with key

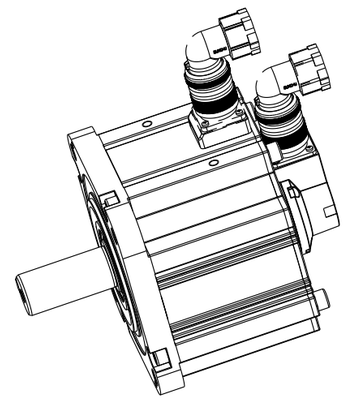

				Motor Outline Drawing	01118149-WX	
B01	New Archive	/	20241113			
Version	Change method	Change by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version	Page 1 of 1
standardization	/			17.4kg	2:5	B01	Model	MS1H3-44C15CB-S631R-INT
Approve	/					

苏州汇川技术有限公司

A3