

正样
2025.02.08
BQL

Copyright: Copyright infringement reserved


Amendment	Description


外部公开

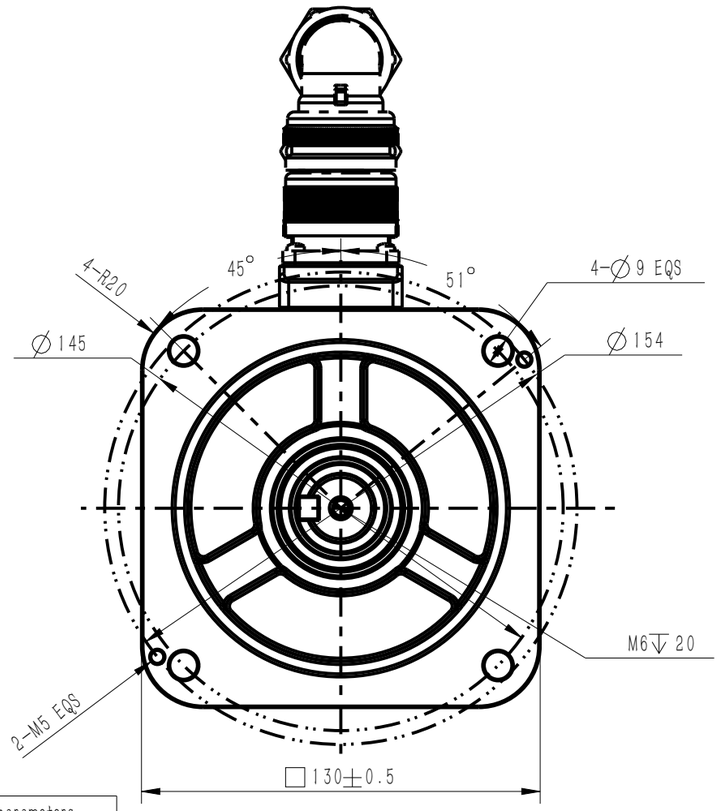

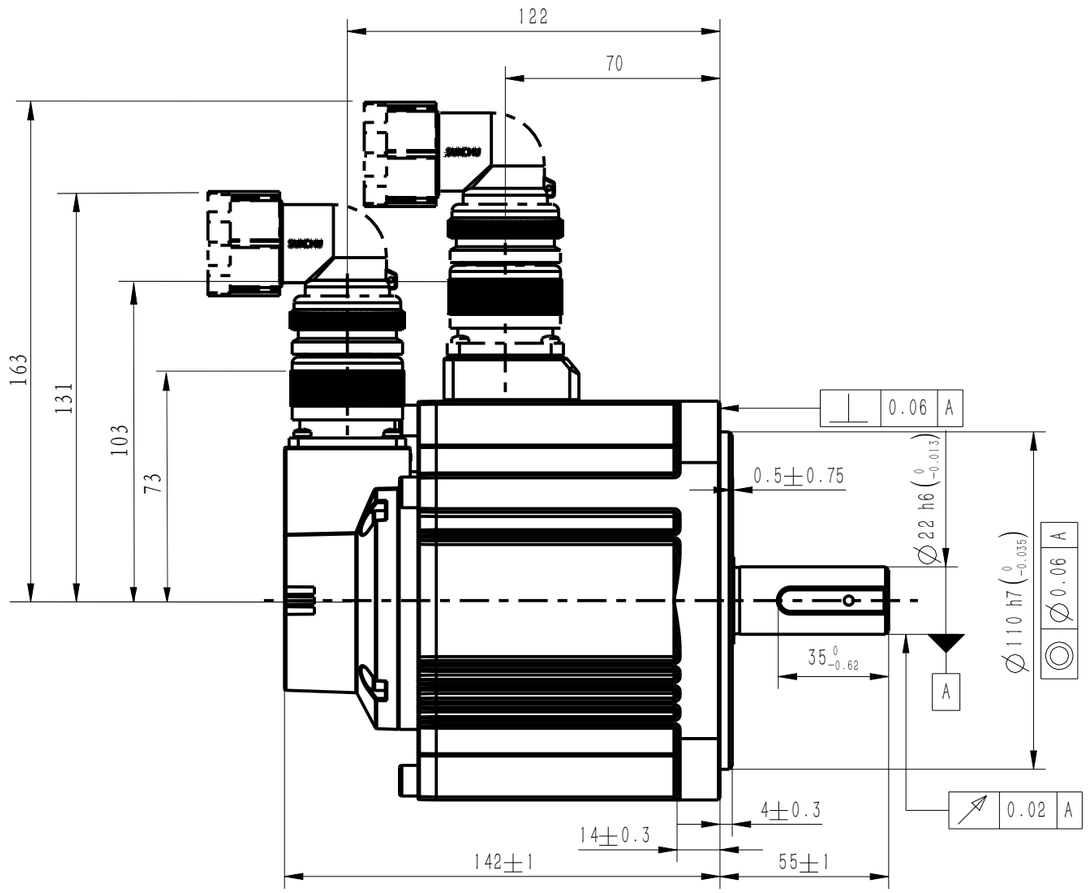


Basic function parameters	
Rated power kW	0.85
Rated voltage V	380
Rated current A	3.5
Peak current at rated speed A	8.5
Rated torque Nm	5.39
Peak torque at rated speed Nm	13.5
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg.cm^2	13.56±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	\
Brake power supply V	\
Brake backlash°	\
Duty cycle	S1
Radial line load N	≤686
Axial load N	≤196

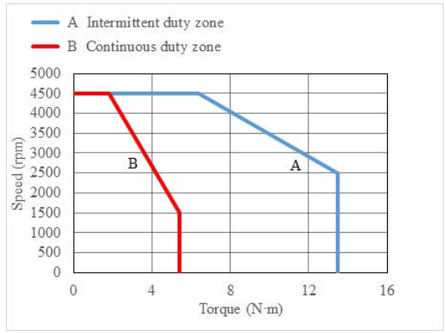




Dimension of shaft end



Dimension of shaft end with key



				Motor Outline Drawing	01118156-WX	
B01	Replace	/	20241227			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Stangardization	/			5.8 kg	1:2	B01
Approve	/					

Page 1 of 1	
Model	MS1H3-85B15CD-S631R-INT

INOVANCE

A3