

正样
2025.02.08
B01

Copyright: Copyright infringement reserved.


Amendment	Description


外部公开

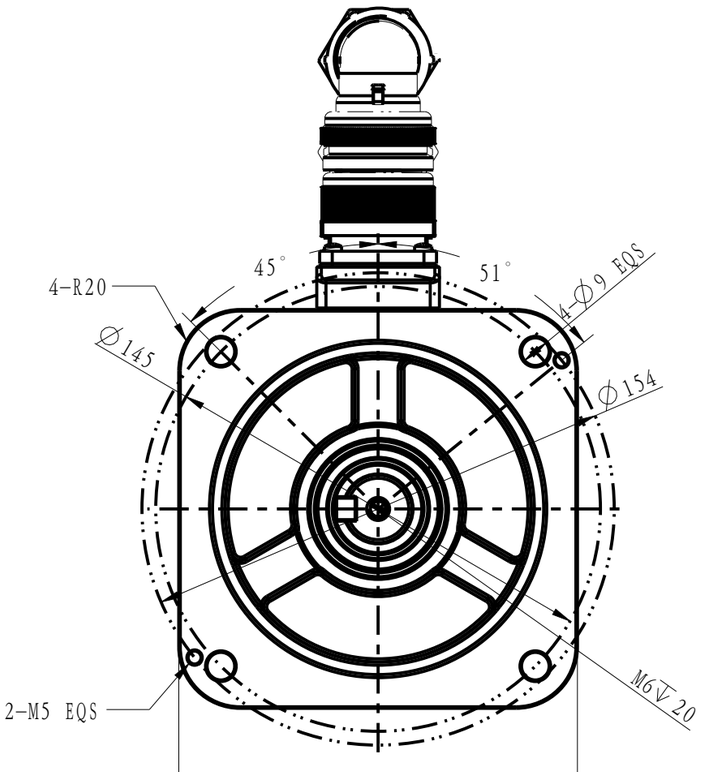

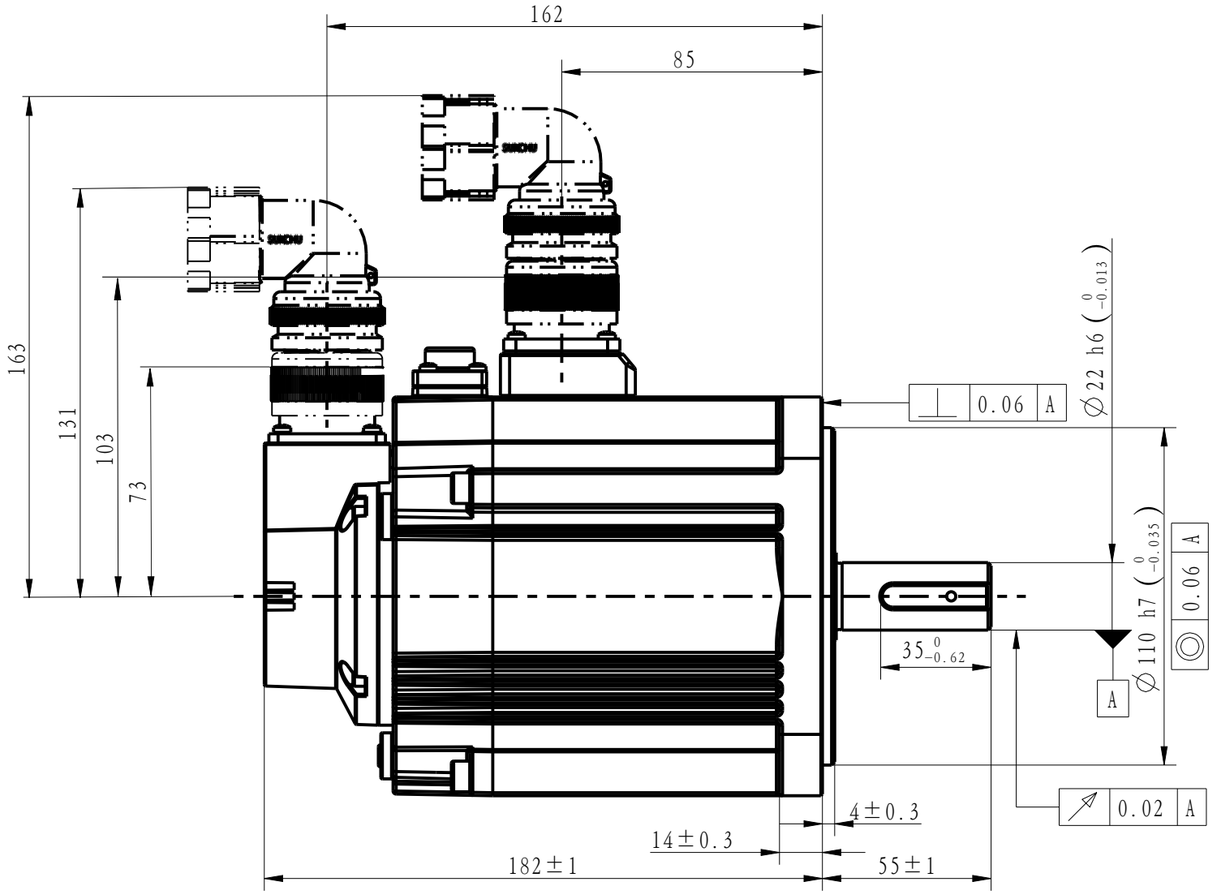


Basic function parameters	
Rated power kW	1.3
Rated voltage V	220
Rated current A	10.5
Peak current at rated speed A	27.3
Rated torque Nm	8.34
Peak torque at rated speed Nm	20.85
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg.cm^2	21.5±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾16
Brake power supply V	DC24±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial line load N	⩽686
Axial load N	⩽196

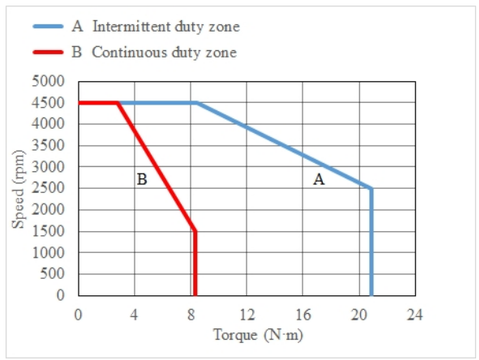




Dimension of shaft end



Dimension of shaft end with key



				Motor Outline Drawing	01118159-WX	
B01	Replace	/	20241227			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Stangardization	/			8.9kg	1:2	B01
Approve	/					

Page 1 of 1	
Model	MS1H3-13C15CB-S634R-INT

INOVANCE

A3