

正样
2023.10.07
B00
版权所有：侵权必究

Amendment	Description


外部公开


Unit: Millimeter (mm)

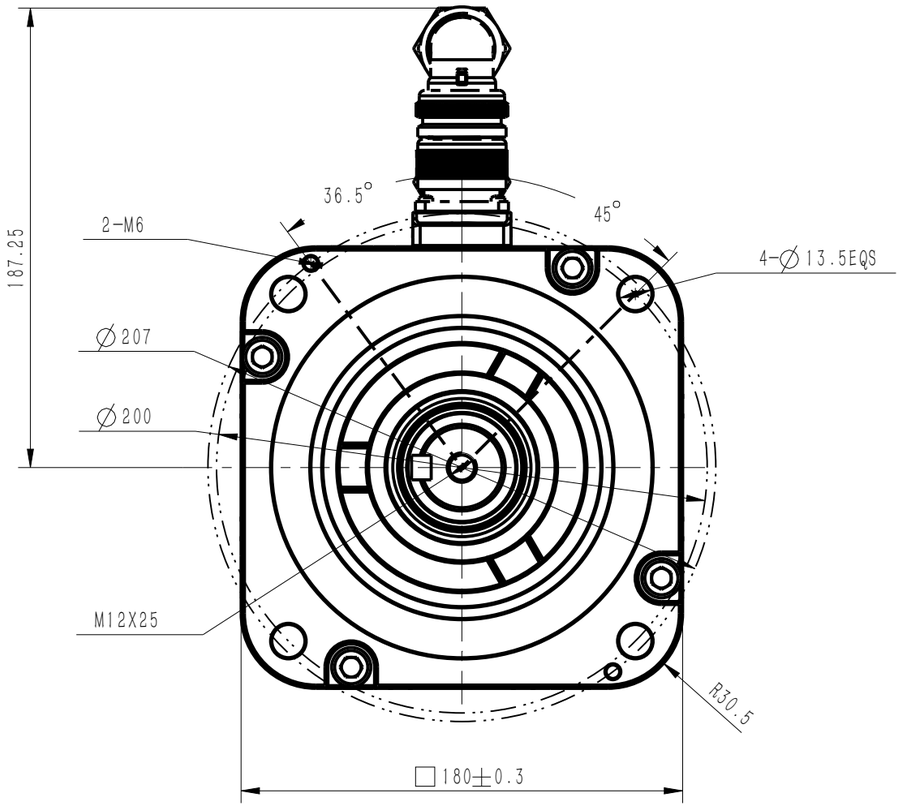

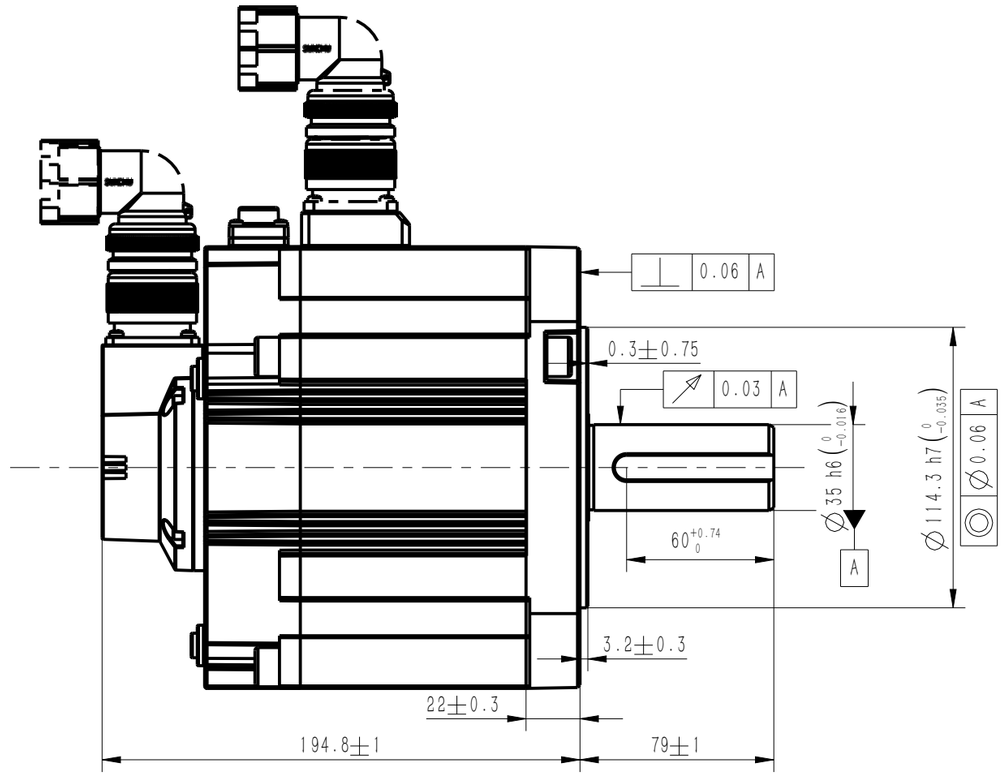


Basic function parameters	
Rated power kW	2.9
Rated voltage V	380
Rated current A	⩽10.5
Pea current at rated speed A	⩽29.75
Rated torque Nm	18.6
Peak torque at rated speed Nm	46.5
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm^2	44.7
Encoder resolution	26bit
insulation class	F
Protection level	IP67
Static torque of brake Nm	50
Brake power supply	24V(±10%)
duty cycle	S1
Radial line load N	⩽1470
Axial load N	⩽490

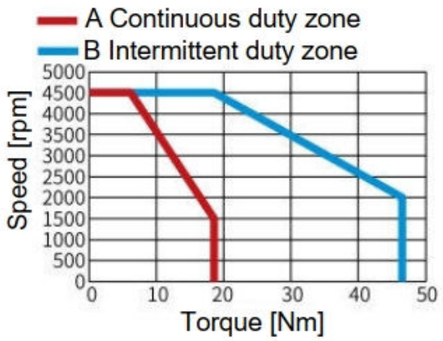




Dimension of shaft end

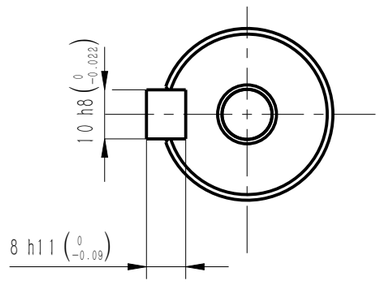

Dimension of shaft end with key

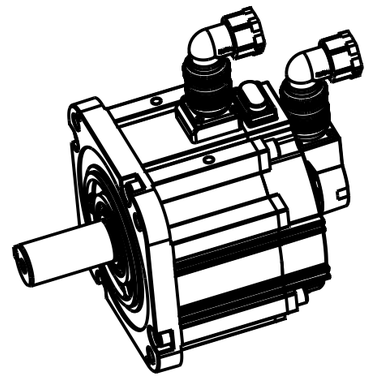

				Motor Outline Drawing	01118164-WX	
B00	New Archive	/	20230830			
Version	Change method	Change by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
tandardizatio	/			17.9kg	1:2	B00
Approve	/					

Page 1 of 1

Model: MS1H3-29C15CD-S634R-INT

苏州汇川技术有限公司

A3