
正样
2023.10.07
B00


Copyright: Copyright infringement reserved!

Amendment	Description


外部公开


Unit: Millimeter (mm)

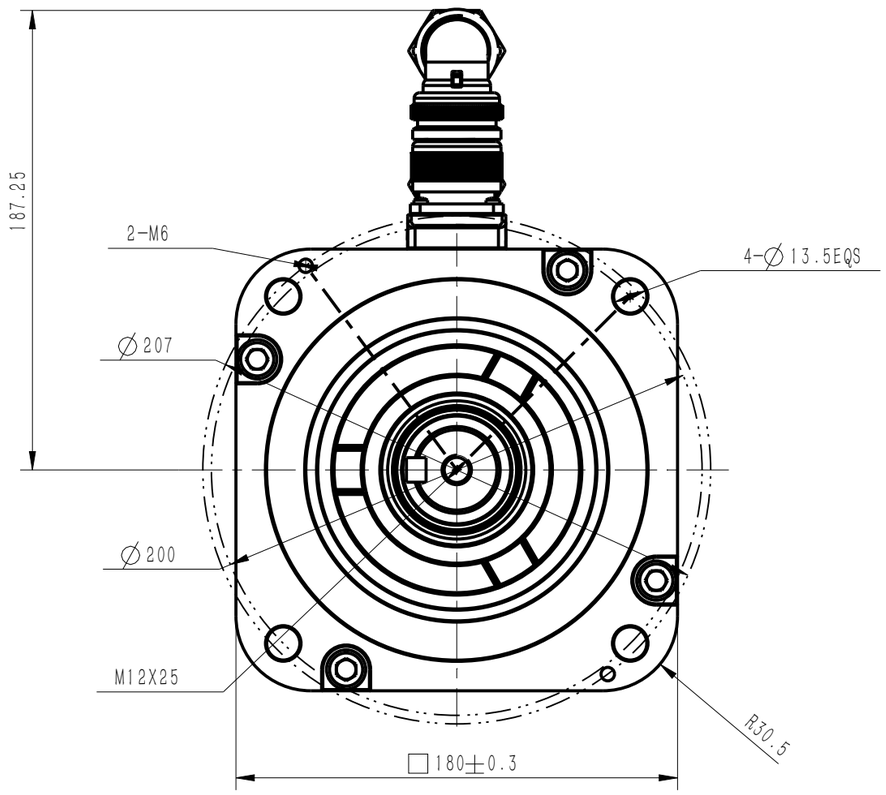

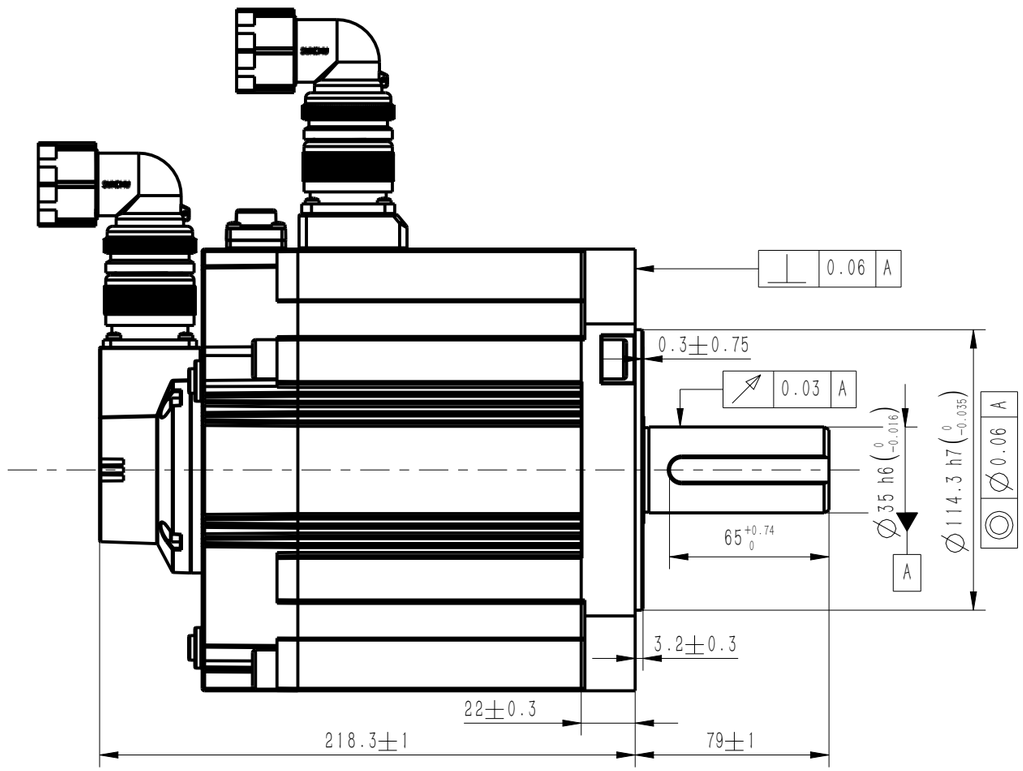


Basic function parameters	
Rated power kW	4.4
Rated voltage V	380
Rated current A	⩽16
Pea current at rated speed A	⩽42
Rated torque Nm	28.4
Peak torque at rated speed Nm	71.1
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm^2	72.55
Encoder resolution	26bit
insulation class	F
Protection level	IP67
Static torque of brake Nm	50
Brake power supply	24V(±10%)
duty cycle	S1
Radial line load N	⩽1470
Axial load N	⩽490

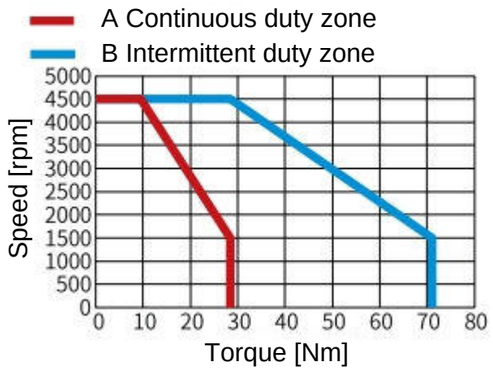




Dimension of shaft end



Dimension of shaft end with key

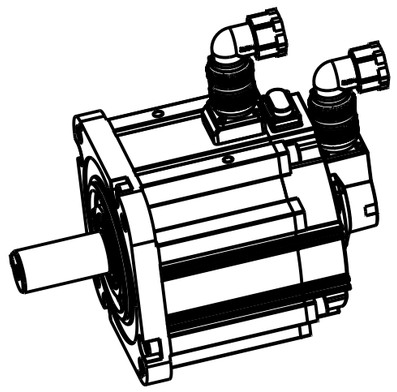

				Motor Outline Drawing	01118166-WX
B00	New Archive	/	20230831		
Version	Change method	Change by	Date		
Design	/			/	Mark INOVANCE
Check	/				
Craft	/				
Verify	/			Weight	Scale / Version / Page 1 of 1
tandardizatio	/			21.6kg	2:5 / B00
Approve	/				Model MS1H3-44C15CD-S634R-INT

INOVANCE

A3