

正样
2025.02.08
B01

Copyright: Copyright infringement reserved


| Amendment | Description |
|---|---|
| | |


外部公开

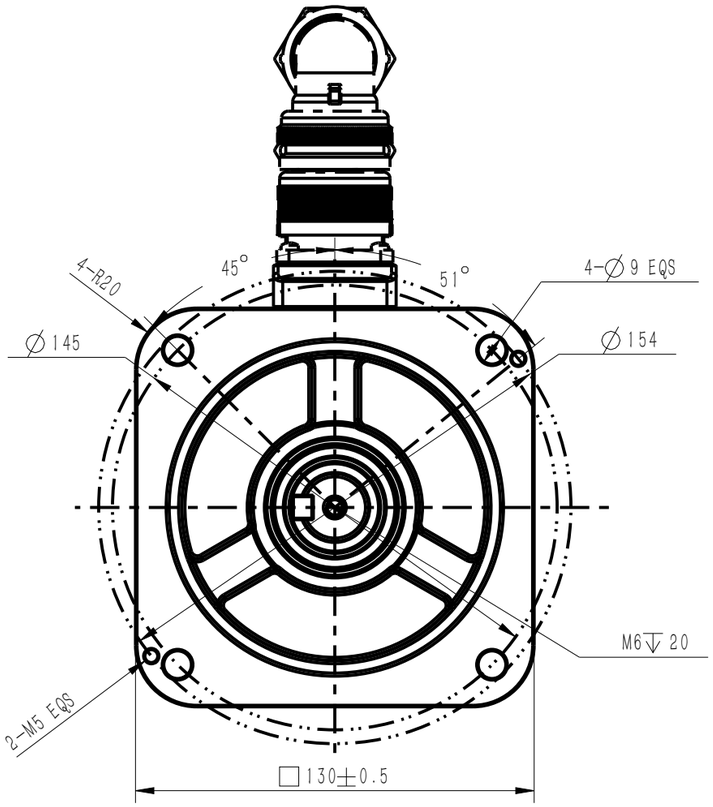

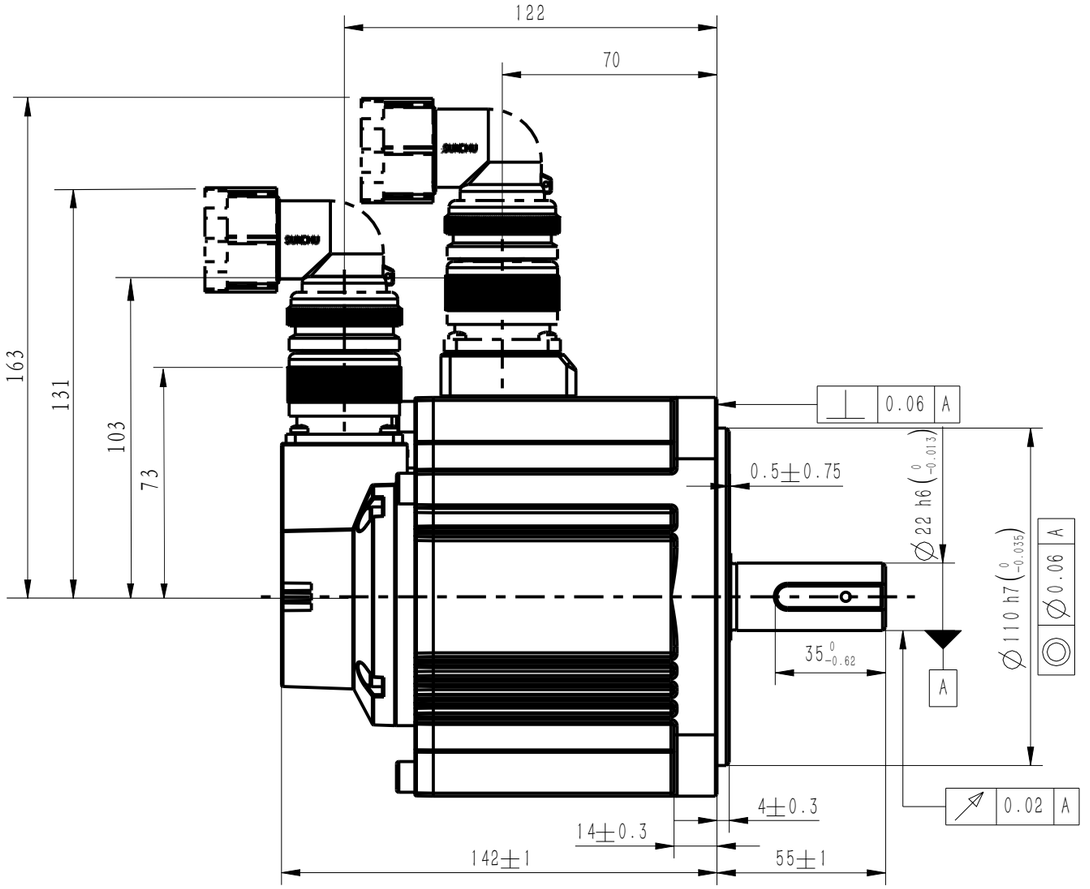


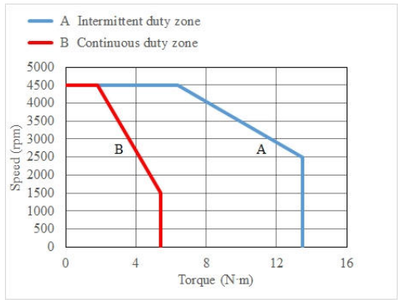

| Basic function parameters | |
|---|---|
| Rated power kW | 0.85 |
| Rated voltage V | 220 |
| Rated current A | 6.6 |
| Peak current at rated speed A | 17.2 |
| Rated torque Nm | 5.39 |
| Peak torque at rated speed Nm | 13.5 |
| Rated speed rpm | 1500 |
| Max speed rpm | 4500 |
| Rotor inertia kg.cm$^2$ | 3.56±10% |
| Encoder resolution | 26bit |
| Insulation class | F |
| Protection level | IP67 |
| Static torque of brake Nm | \ |
| Brake power supply V | \ |
| Brake backlash° | \ |
| Duty cycle | S1 |
| Radial line load N | ⩽686 |
| Axial load N | ⩽196 |





Dimension of shaft end




Dimension of shaft end with key



| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | Motor Outlin Drawing | | 01118168-WX |
| B01 | Replace | / | 20240518 | | | |
| Version | Change method | Changed by | Date | | | |
| Design | / | | | / | Mark | INOVANCE |
| Check | / | | | | | |
| Craft | / | | | | | |
| Verify | / | | | Weight | Scale | Version |
| Stangardization | / | | | 5.8 kg | 1:2 | B01 |
| Approve | / | | | | | |

| Page 1 of 1 | | |
|---|---|---|
| Model | MS1H3-85B15CB-S631R-INT | |

INOVANCE

A3