
正样
2024.12.23
B01


Copyright: Copyright infringement reserved


Amendment	Description

外部公开


Unit: Millimeter (mm)

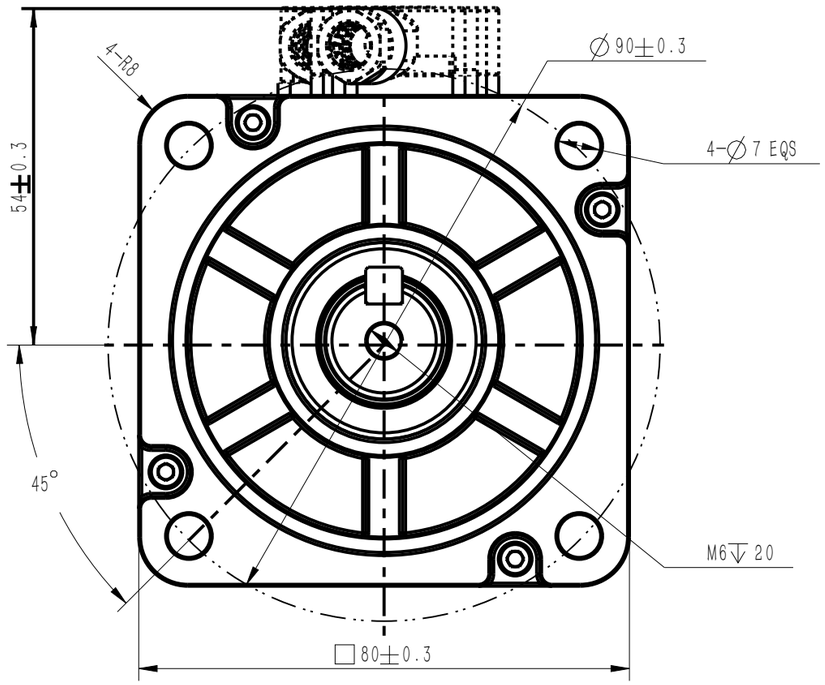

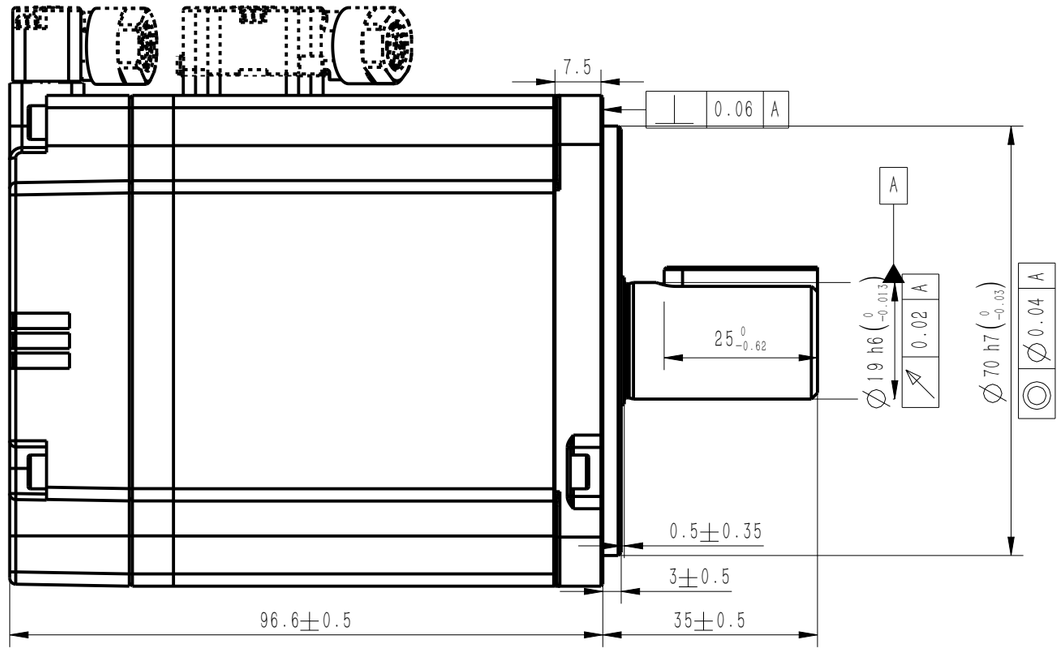


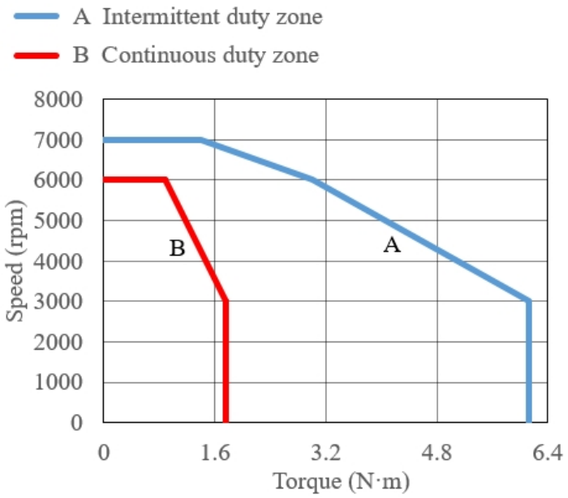


Basic function parameters	
Rated power KW	0.55
Rated voltage V	220
Rated current A	3.9
Peak current at rated speed A	15
Rated torque Nm	1.75
Peak torque at rated speed Nm	6.13
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.55±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Brake backlash°	/
Duty cycle	S1
Radial line load N	≤392
Axial load N	≤147



Dimension of shaft end



Dimension of shaft end with key

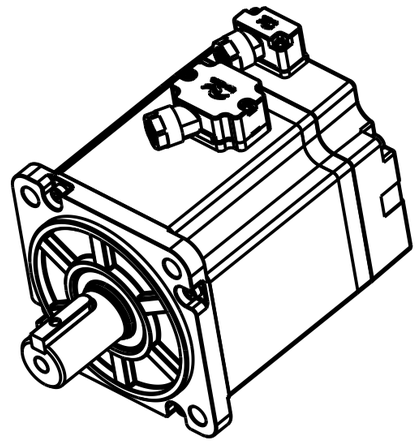

B01	New Archive	/	20240929	Motor Outline Drawing	01118368-WX
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				
Craft	/				
Verify	/			Weight	Scale / Version
Standardization	/			1.88kg	1:1 / B01
Approve	/				

INOVANCE

Page 1 of 1

Model: MS1H1-55B30CB-S631R-INT

A3