
正样
2024.12.23
B01


Copyright: Copyright infringement reserved.


外部公开

Amendment	Description


Unit: Millimeter (mm)

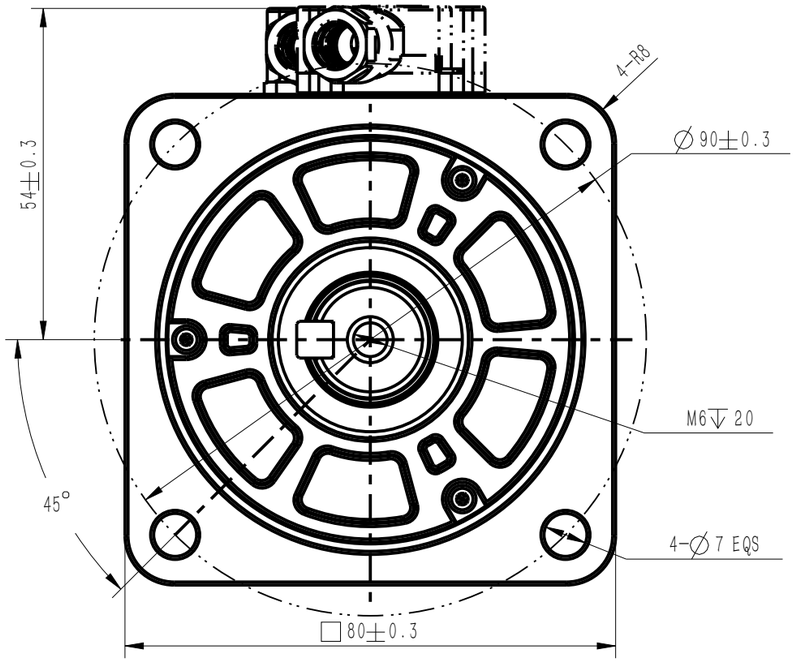

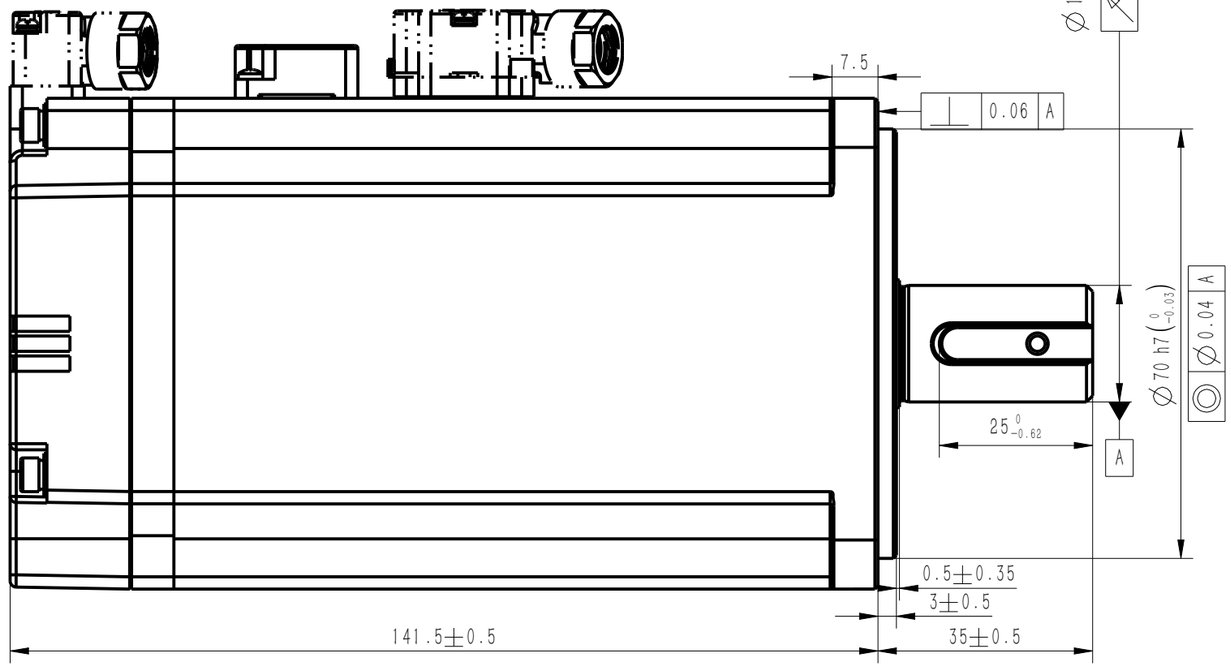


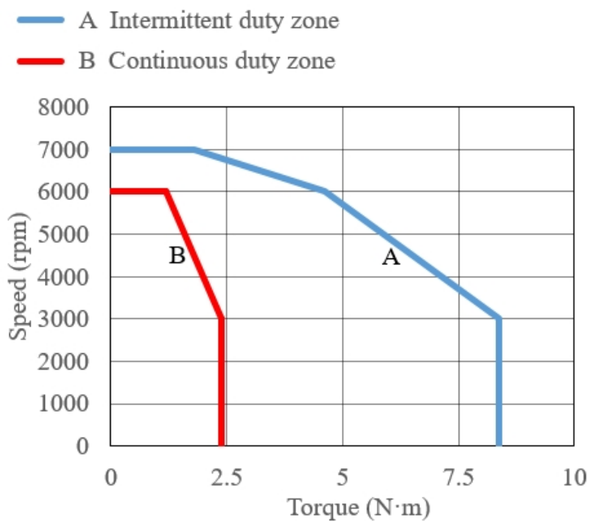


Basic function parameters	
Rated power KW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.71±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾3.2
Brake power supply	DC24V±10%
Brake backlash°	⩽1
Duty cycle	S1
Radial line load N	⩽392
Axial load N	⩽147



Dimension of shaft end



Dimension of shaft end with key

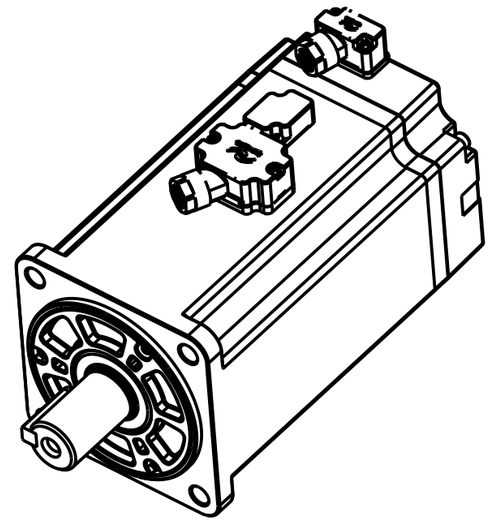

				Motor Outline Drawing	01118373-WX	
B01	New Archive	/	20241009			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.88kg	1:1	B01
Approve	/					

Page 1 of 1	
Model	MS1H1-75B30CB-S634R-INT

INOVANCE

A3