

正样
2026.05.26
B01


Amendment	Description


外部公开


Unit: mm

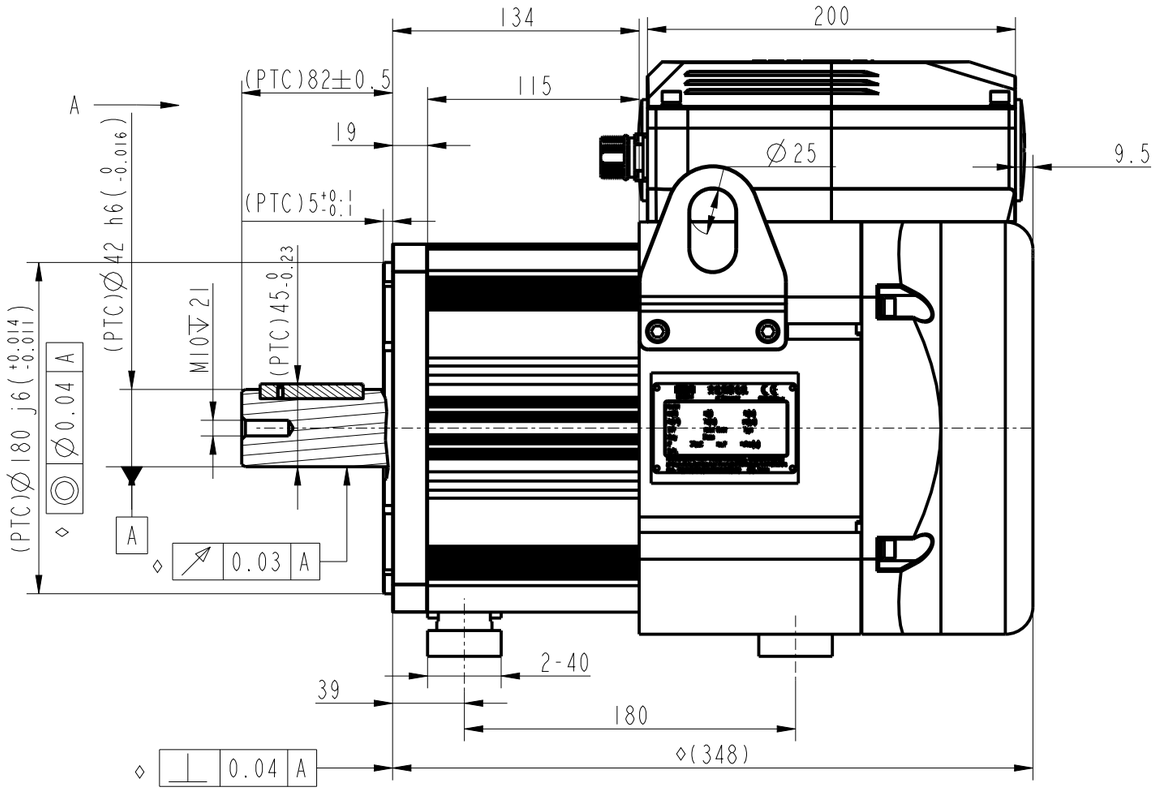

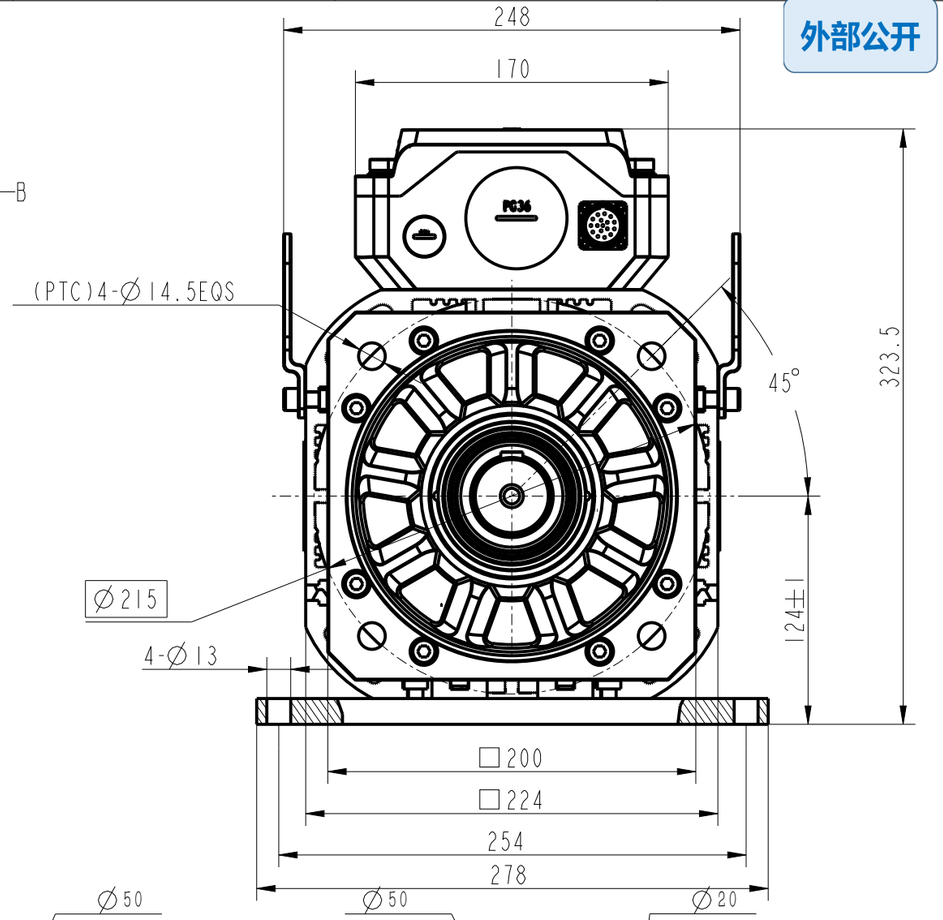




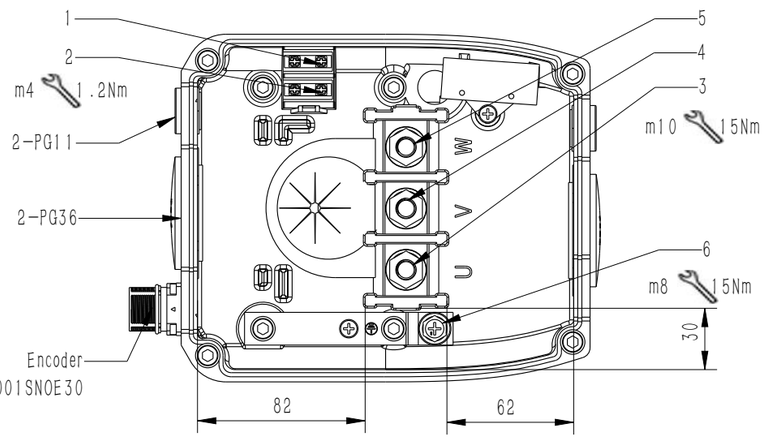


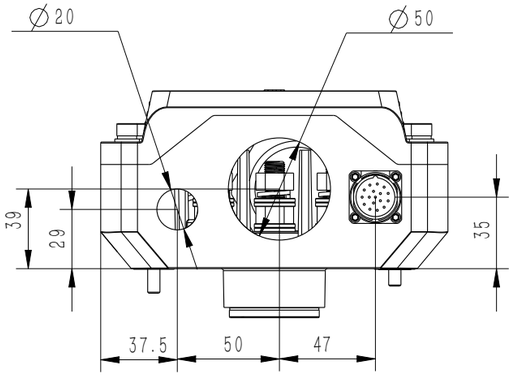


View A

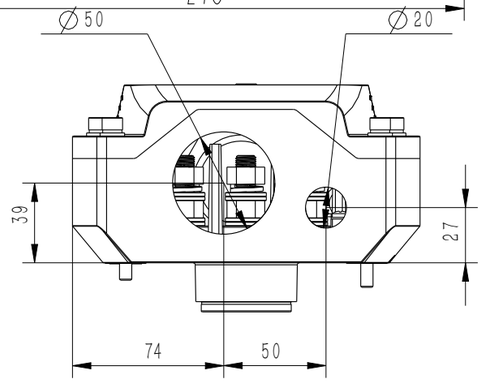

View B

Service life (50000h)		
Radial load (N)	Axial load (N)	
Fr	Fa	
1639	501	

Nr	Specifications	Shape	Description
1	M4	Forked Type	Fan+
2	M4		Fan−
3	M10	Ring Type	U(red)
4	M10		V(yellow)
5	M10		W(blue)
6	M8		GND

Name	Definition of wiring for absolute value encoders							PT1000		
Definition	PS+ Yellow	PS− Yellow black	VB Battery+ Blue	VB Battery− Blue black	+5V Red	GND Black	Shielding layer	PT1000− White	PT1000+ Red	
17P Aviation connector	10	7	5	6	16	9	15	4	14	

B01	Replace		20260525	Motor Outline Drawing	01118477-WX	
B00	New Archive		20231009			
Version	Change method	Changed by	Date			
Design				/	Mark	INOVANCE
Check						
Craft						
Verify				Weight	Scale	Version	Page 1 Of 2
Standardization				38.2kg	1:4	B01	Model	MEG20-13D20CD-A3A1F-K-INT
Approve						

Copyright: Copyright infringement reserved.

INOVANCE

A3


正样
2026.05.26
B01

Amendment	Description

外部公开

Copyright: Copyright infringement reserved.

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	59
Rated Current	A	21.1
Rated Power	kW	12.4
Rated Speed	rpm	2000
Rate Frequency	Hz	133.33
Peak Torque	Nm	134
Peak Current	A	48
Max speed@380V	rpm	3000
Rated voltage	V	380
Rotor inertia	kg · cm^2	90
Weight	kg	38.2
Duty	S1	

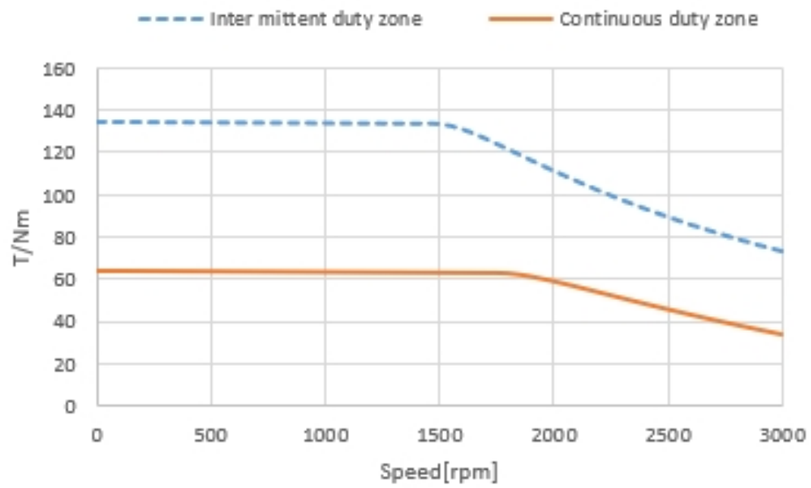

				Motor Outline Drawing			01118477-WX
B01	Replace		20260525				
B00	New Archive		20231009				
Version	Change method	Changed by	Date				
Design				/			Mark
Check							
Craft							
Verify				Weight	Scale	Version	Page 2 Of 2
Standardization				38.2kg	1:4	B01	Model MEG20-13D20CD-A3A1F-K-INT
Approve							

INOVANCE

A3