

正样
2024.04.03
B00


版权所有:侵权必究


外部公开


Amendment	Description

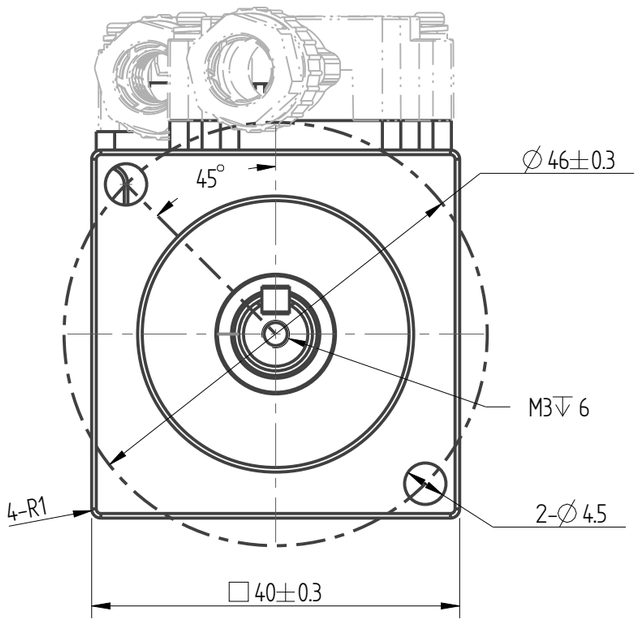

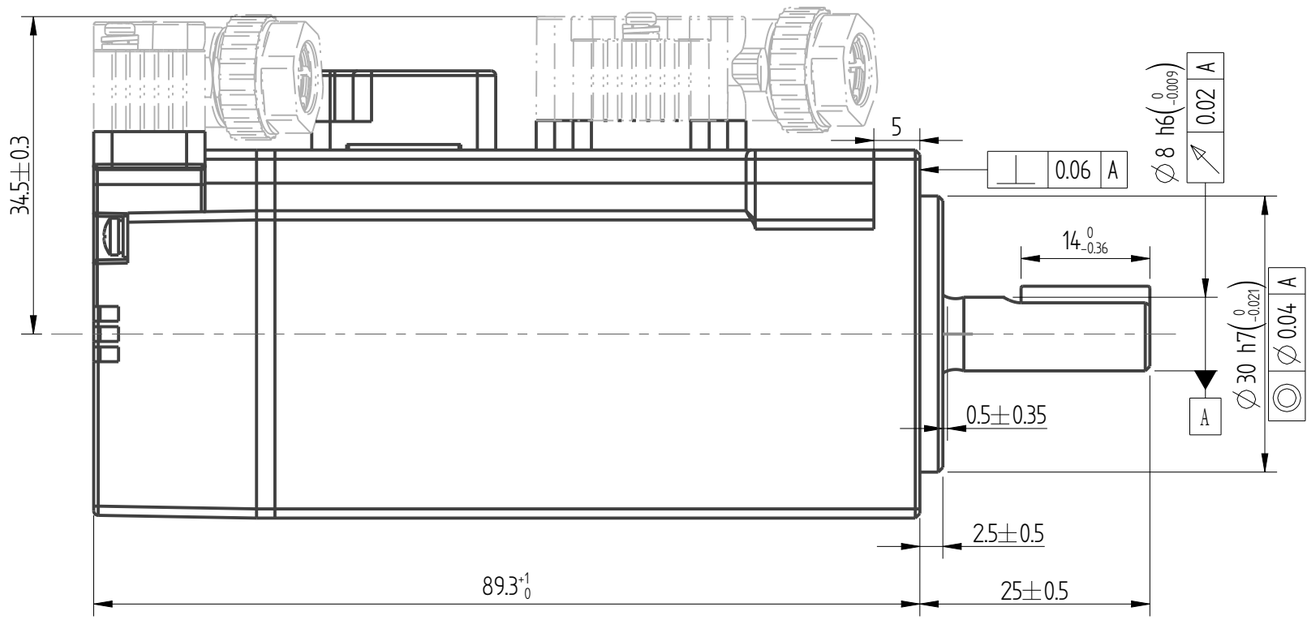






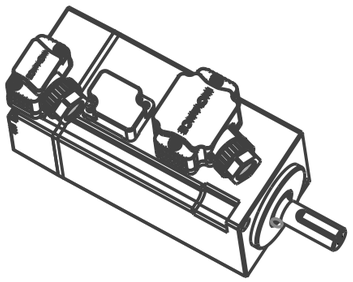

Basic function parameters	
Rated power KW	0.1
Rated voltage V	220
Rated current A	1.27
Peak current at rated speed A	4.78
Rated torque Nm	0.32
Peak torque at rated speed Nm	1.12
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm2	0.074±10%
Encoder resolution	26 bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	⩾0.32
Brake power supply	DC24±10%
Duty cycle	S1
Radial line load N	⩽78
Axial load N	⩽54

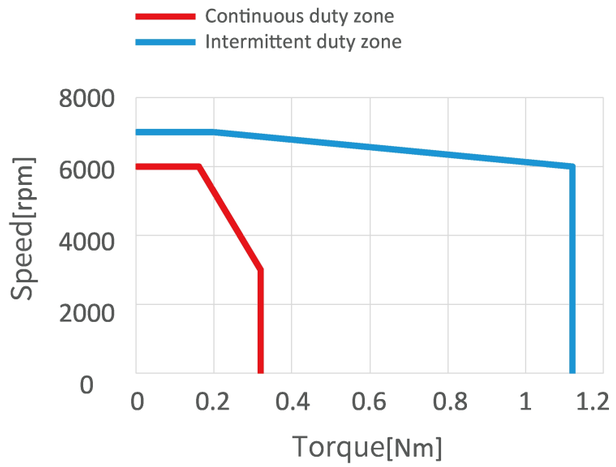

				Motor Outline Drawing		01119473-WX	
B00	New Archive	/	20230825				
Version	Change method	Changed by	Date				
Design	/				Mark	INOVANCE	
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			0.43kg	1:1	B00	Model MS1H4-10B30CB-A632R-INT
Approve	/						

苏州汇川技术有限公司

A3