

正样
2026.05.09
B01


版权所有·侵权必究


外部公开


Amendment	Description

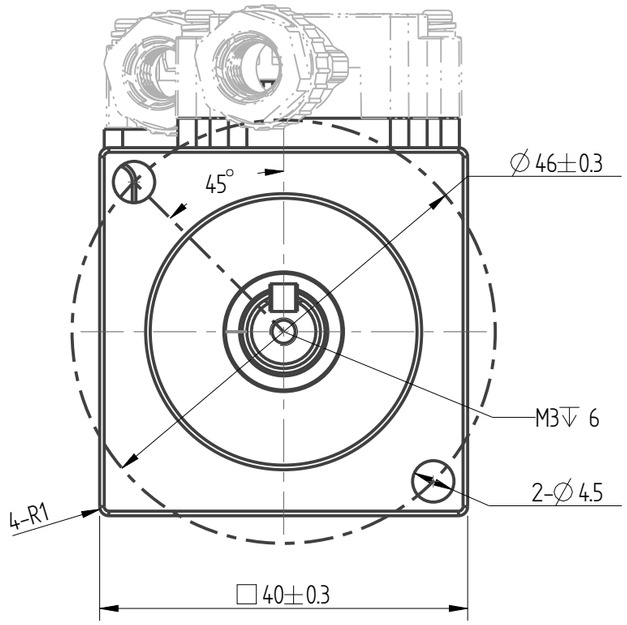

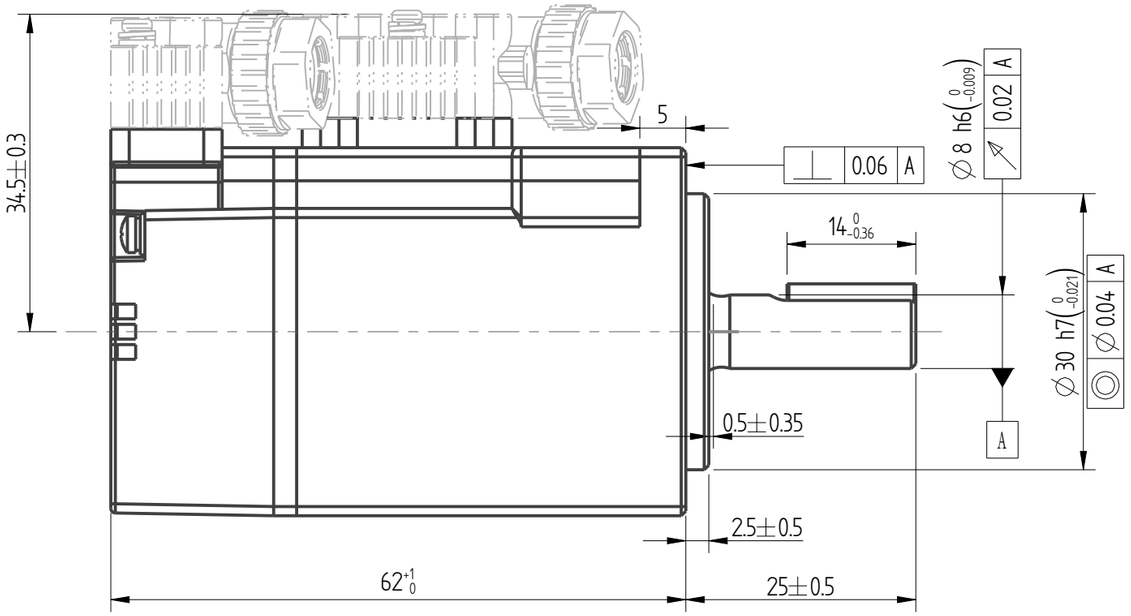


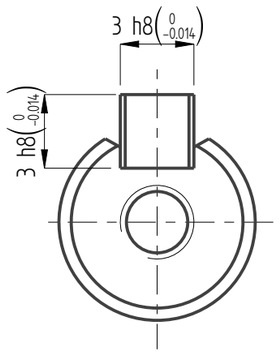



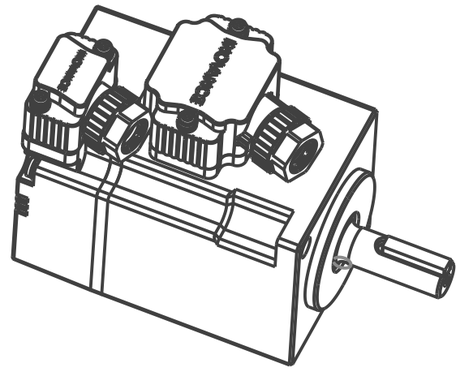

Basic function parameters	
Rated power KW	0.1
Rated voltage V	220
Rated current A	1.27
Peak current at rated speed A	4.78
Rated torque Nm	0.32
Peak torque at rated speed Nm	1.12
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm2	0.072± 10%
Encoder resolution	26 bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	⩽78
Axial load N	⩽54

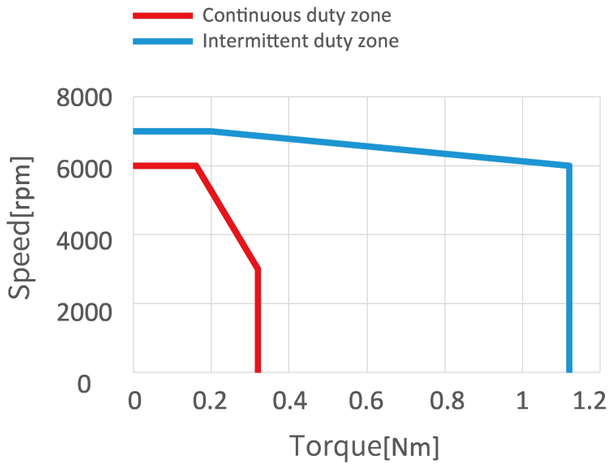

				Motor Outline Drawing	01119474-WX	
B01	New Archive	/	20260425			
Version	Change method	Changed by	Date			
Design	/				Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			0.32kg	1:1	B01
Approve	/					

Page 1 of 1

Model MS1H4-10B30CB-A630R-INT

苏州汇川技术有限公司

A3