
正样
2025.07.10
B01


版权所有·侵权必究


外部公开


Amendment	Description

Unit: mm

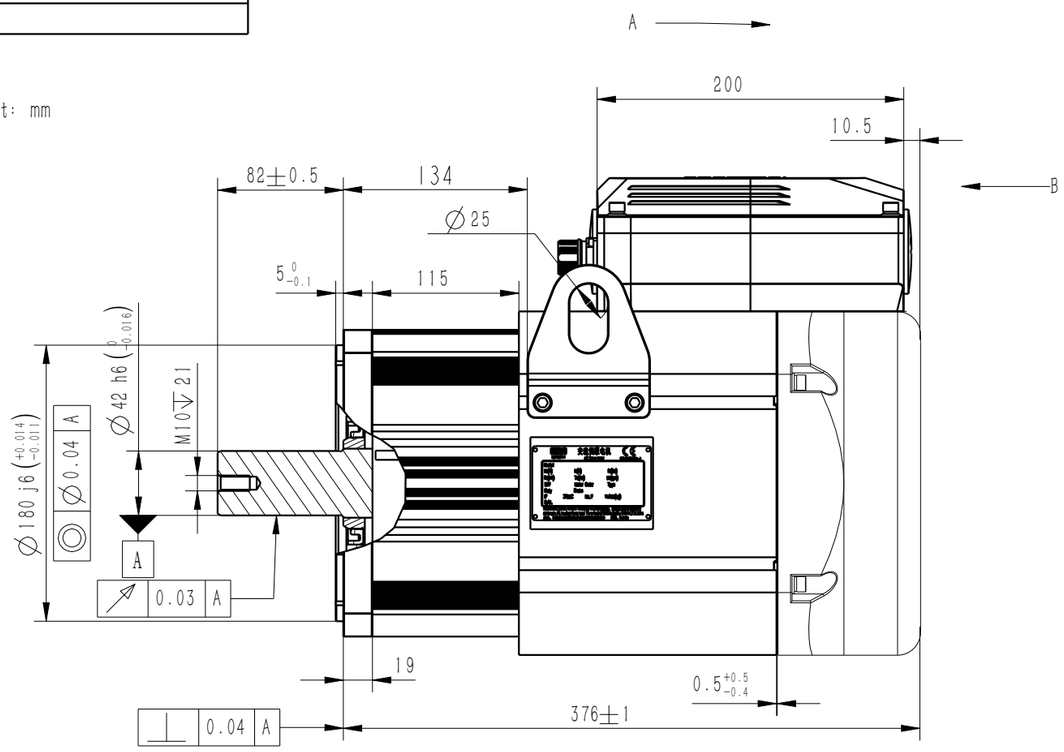


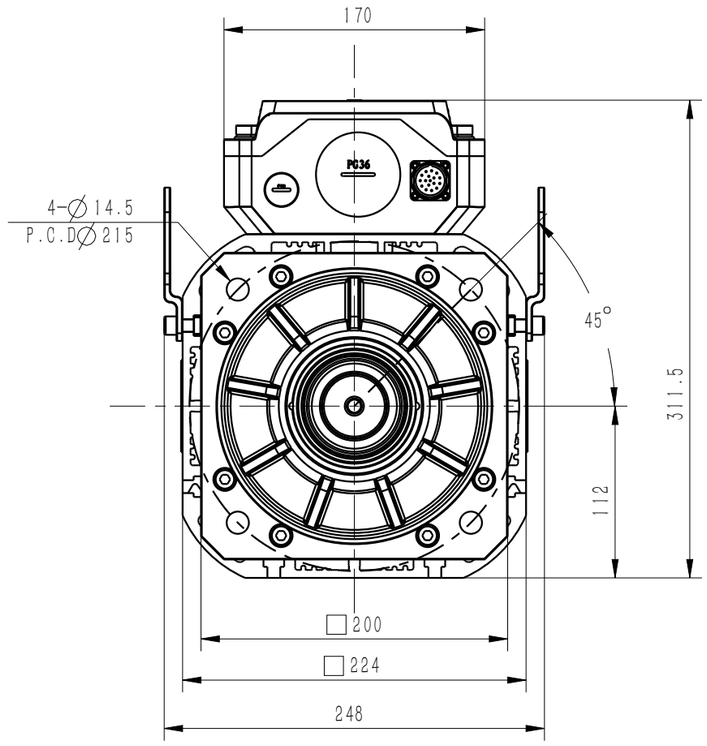

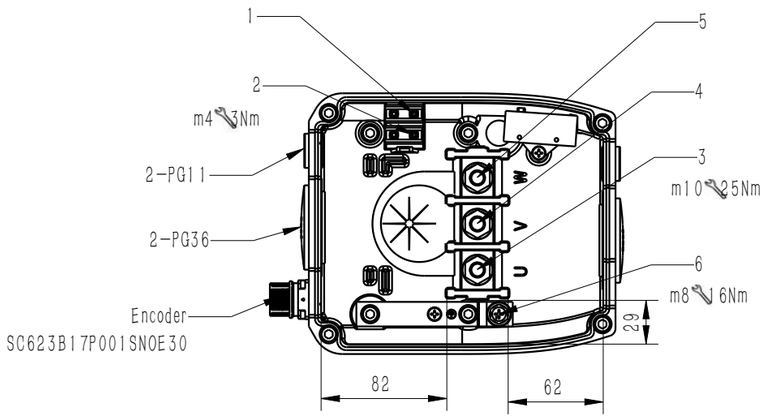

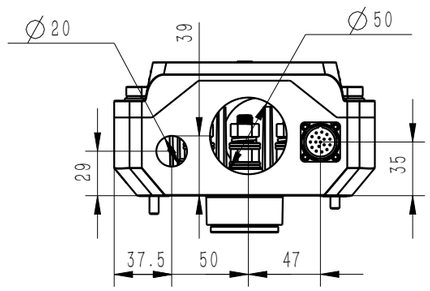


View A

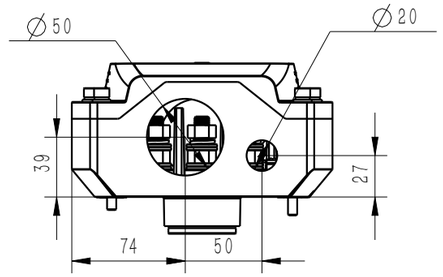


View B

Name	Definition of wiring for absolute value encoders							PT1000	
Definition	PS+ Yellow	PS− Yellow black	VB Battery+ Blue	VB Battery− Blue black	+5V Red	GND Black	Shielding layer	PT1000− White	PT1000+ Red
17P Aviation connector	10	7	5	6	16	9	15	4	14



Service life	
Radial load (N)	Axial load (N)
Fr	Fa
1611	270



Nr	Specifications	Shape	Description
1	M4	Forked Type	Fan+
2	M4		Fan−
3	M10	Ring Type	U(red)
4	M10		V(yellow)
5	M10		W(blue)
6	M8		GND

				Motor Outline Drawing	01119841-WX
B01	New Archive	/	20250606		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				INOVANCE
Craft	/				
Verify	/			Weight	Scale / Version / Page 1 Of 2
Standardization	/			40.2kg	1:4 / B01 / Model: MEG20-20D22CD-A311F-INT
Approve	/				

苏州汇川技术有限公司

A3

正样
2025.07.10
B01


版权所有:侵权必究

Amendment	Description

外部公开

Unit: mm

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	88
Rated Current	A	35.8
Rated Power	kW	20.3
Rated Speed	rpm	2200
Rate Frequency	Hz	146.67
Peak Torque	Nm	142
Peak Current	A	55.5
Max speed@380V	rpm	3000
Rated voltage	V	380
Rotor inertia	kg · cm2	111
Weight	kg	40.2
Duty	S1	

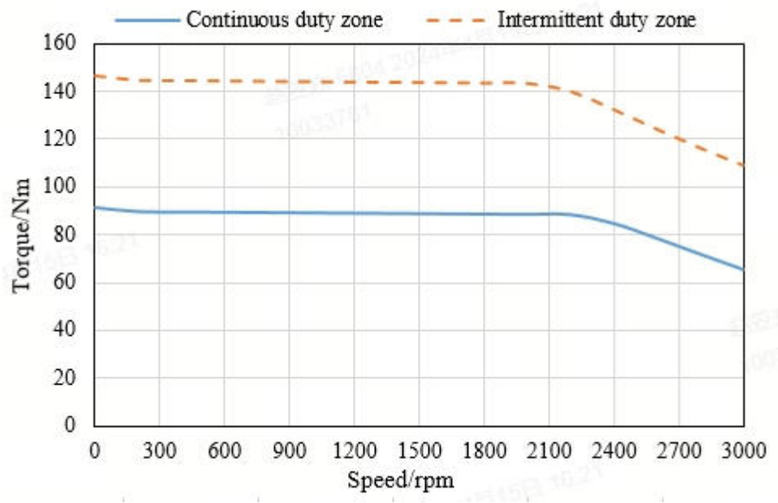

苏州汇川技术有限公司

				Motor Outline Drawing	01119841-WX	
B01	New Archive	/	20250606			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version	Page 2 Of 2
Standardization	/			40.2kg	1:4	B01	Model	MEG20-20D22CD-A311F-INT
Approve	/					

A3