
正样
2025.08.29
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

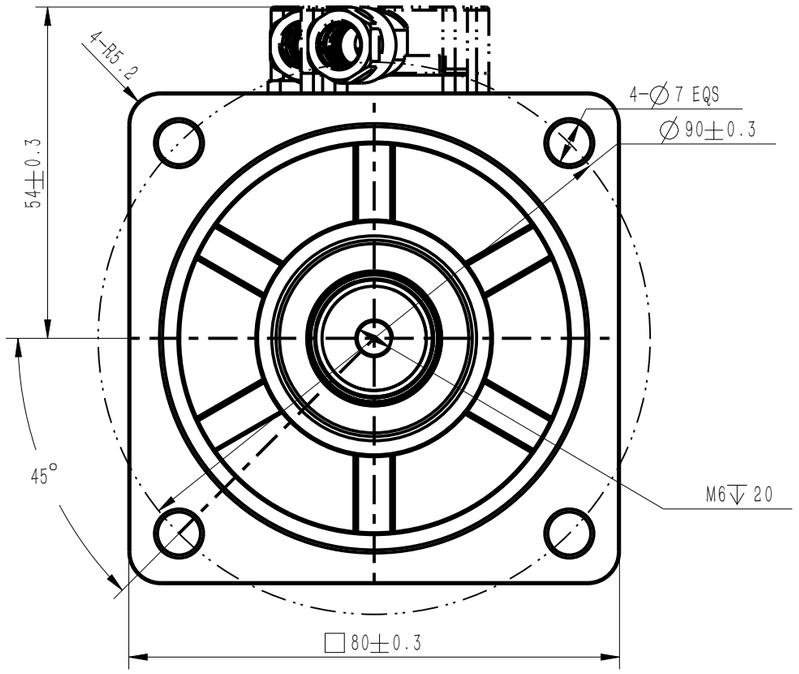


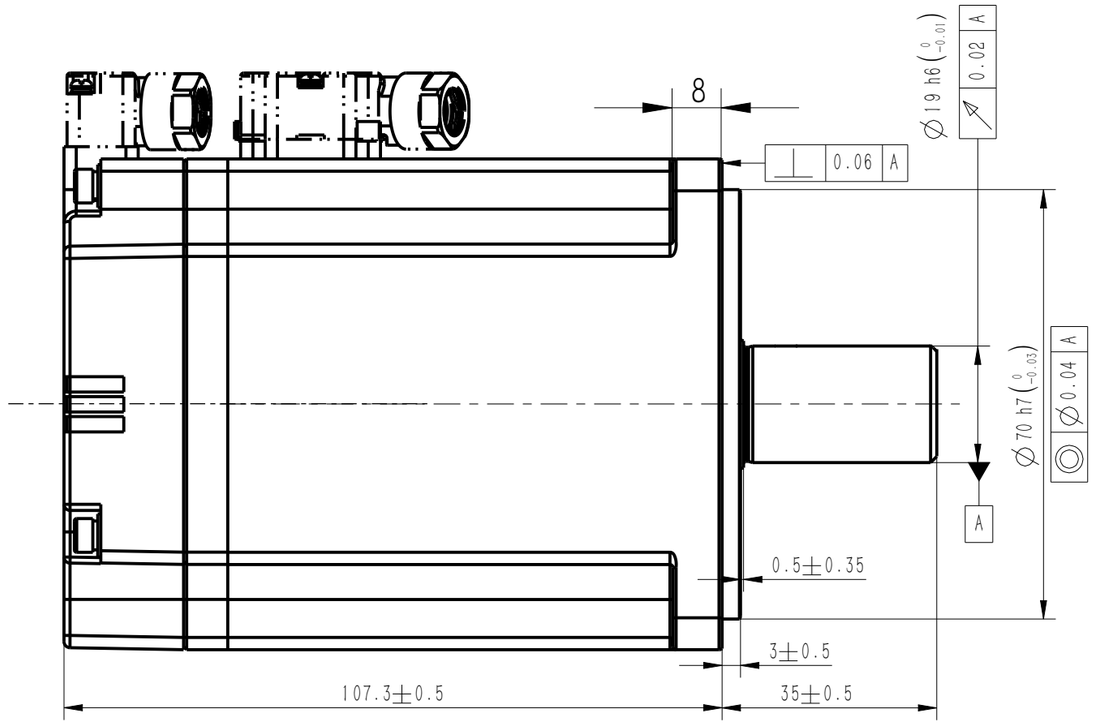

Basic function parameters	
Rated power kW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm^2	1.46±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection class	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	⩽392
Axial load N	⩽147

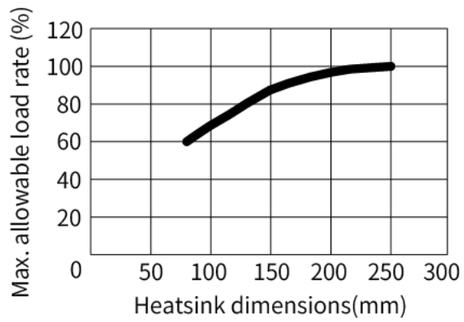

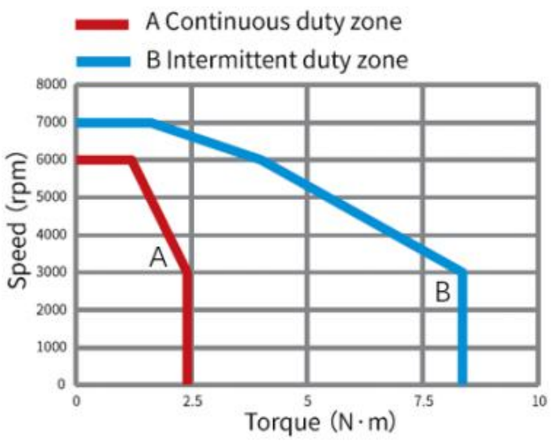

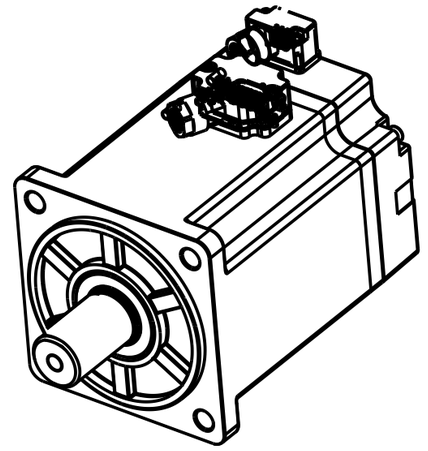

				Motor Outline Drawing		0111A645-WX	
B00	New Archive	/	20250526				
Version	Change method	Changed by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			2.18kg	1:1	B00	Model MS1H4-75B30CB-A311R-INT
Approve	/						

INOVANCE

A3