
正样
2025.08.29
B00


Copyright:Copyright infingmengt reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

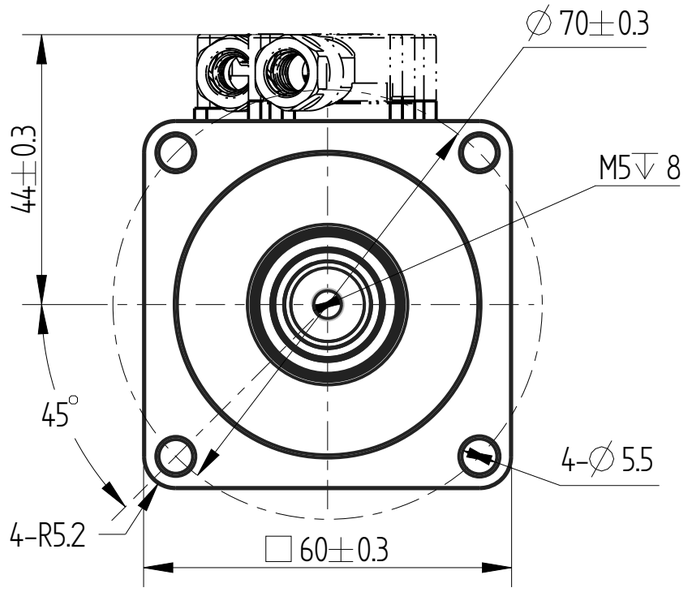


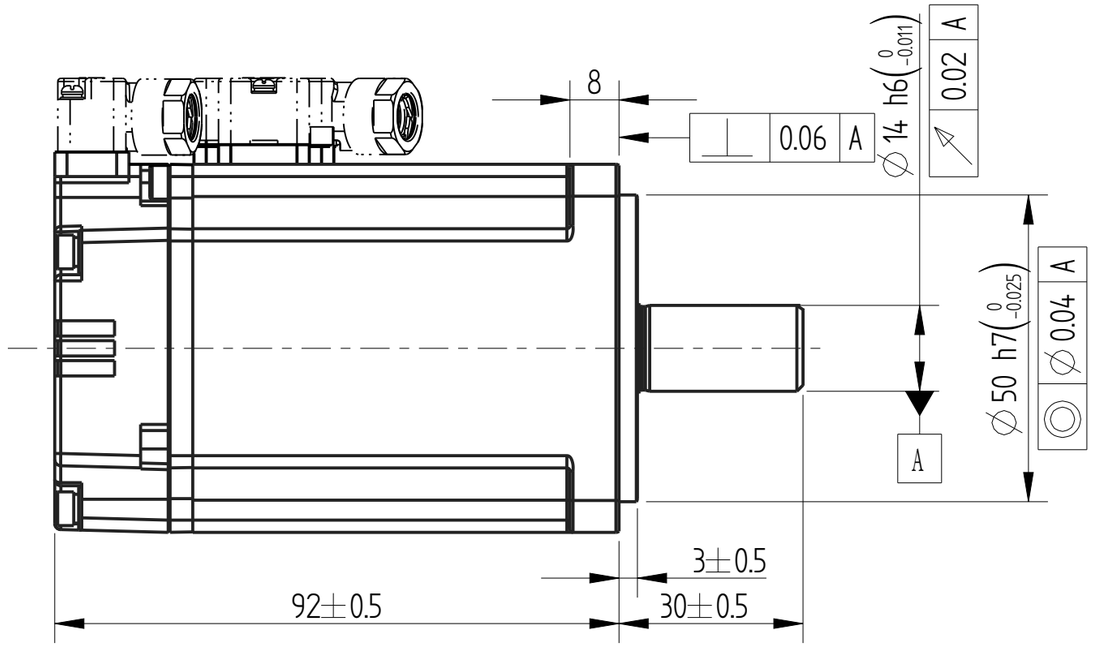

Basic function parameters	
Rated power KW	0.4
Rated voltage V	220
Rated current A	2.4
Peak current at rated speed A	9.2
Rated torque Nm	1.27
Peak torque at rated speed Nm	4.45
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg · cm2	0.43±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤245
Axial load N	≤74

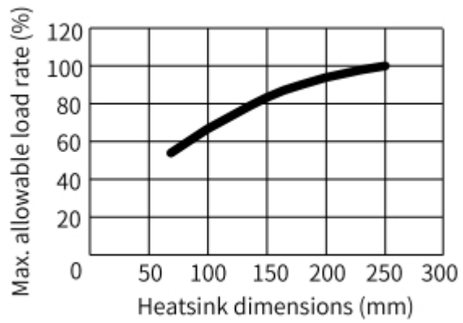

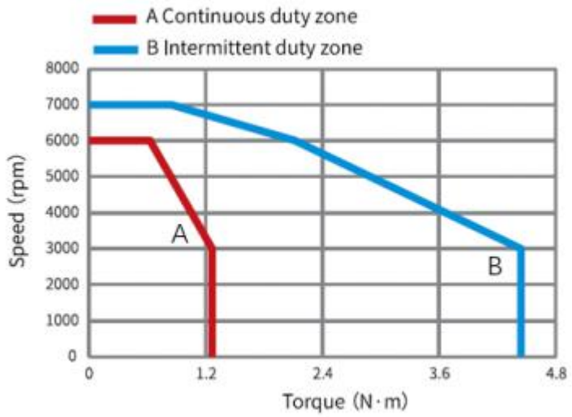

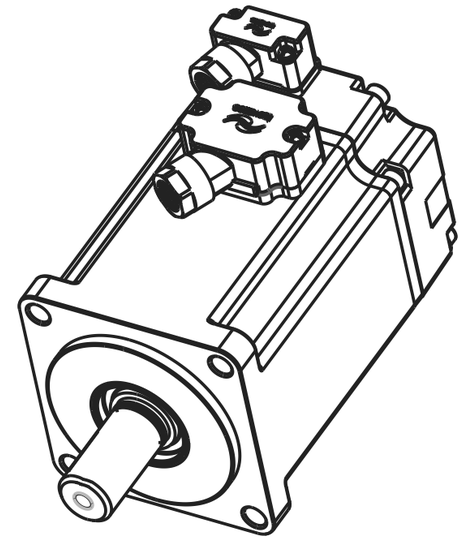

				Motor outline drawing	0111A646-WX	
B00	New Archive	/	20250821			
Version	Change method	Change by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			1.11Kg	1:1	B00	Model	MS1H4-40B30CB-A311R-INT
Approve	/					

INOVANCE

A3