
正样
2025.10.28
B00


外部公开


版权所有·侵权必究


Amendment	Description


Unit: mm

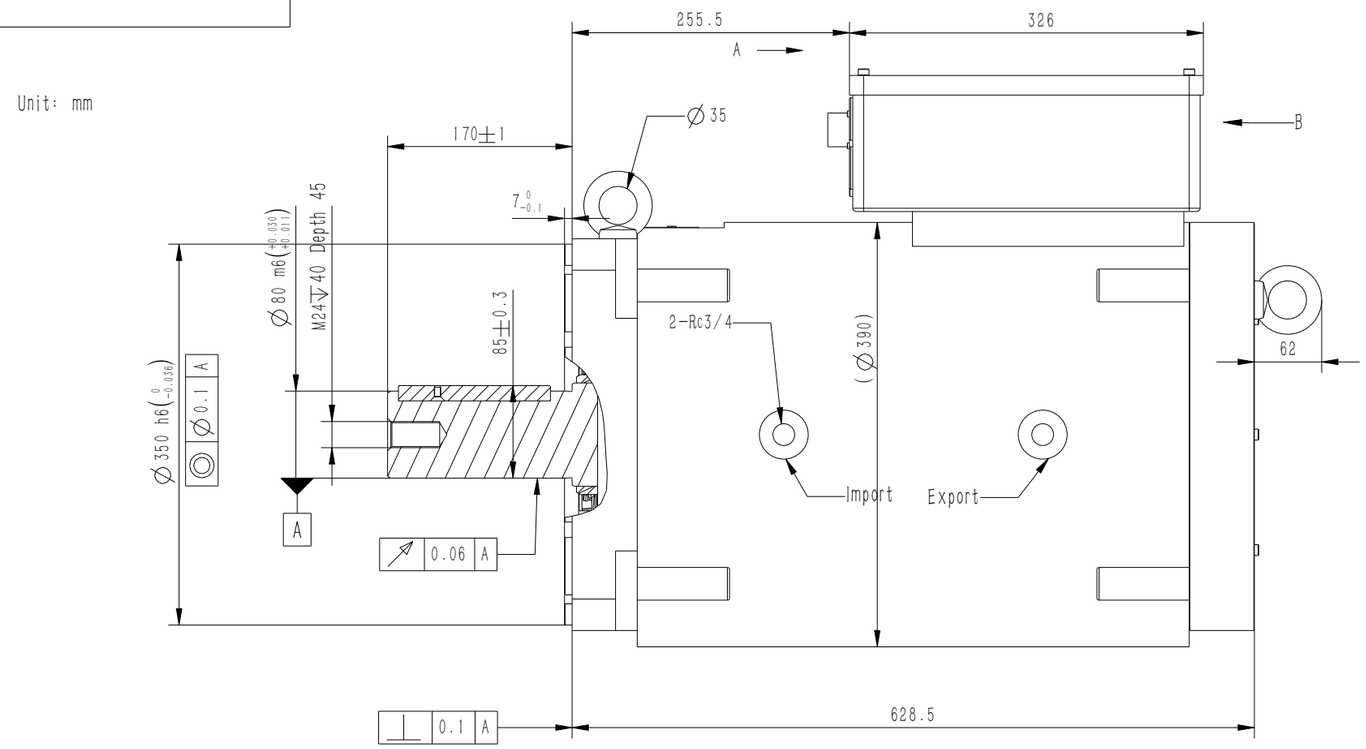


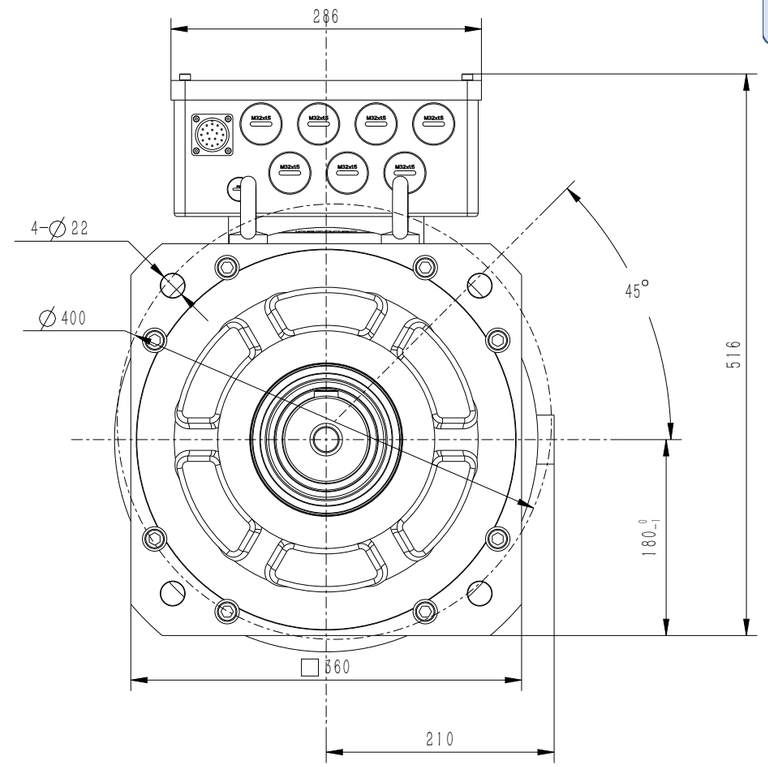



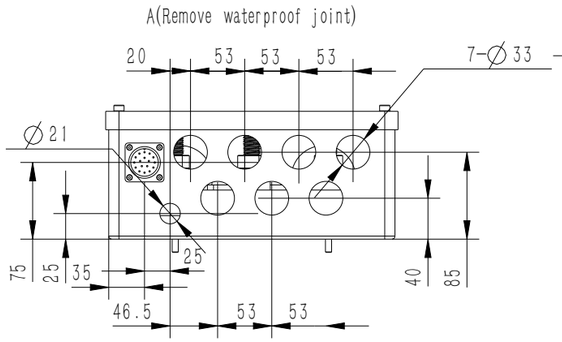

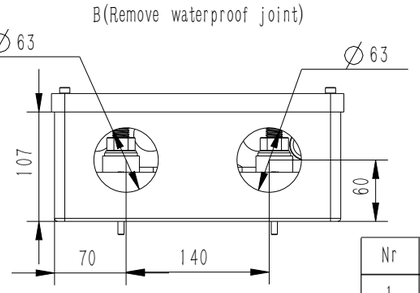


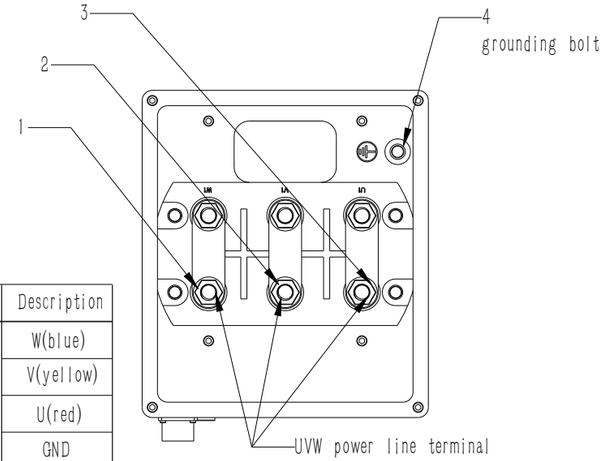

Standard accessories: A-type round head ordinary flat key
22X14X140 Reference GB/T 1096

Nr	Specifications	Shape	Description
1	M16	Ring Type	W(blue)
2	M16		V(yellow)
3	M16		U(red)
4	M12		GND

Service life	
Radial load (N)	Axial load (N)
Fr	Fa
5070	963



Name	Definition of wiring for absolute value encoders							PTC、KTY		
Definition	PS+ Yellow	PS- Yellow black	VB Battery+ Blue	VB Battery- Blue black	+5V Red	GND Black	Shielding layer	PTC+ Blue	PTC-、 KTY+ Blue White	KTY- Green
17P Aviation connecto	A	B	E	F	G	H	J	K	L	M



B00	New Archive	/	20250521
Version	Change method	Changed by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor Outline Drawing

0111AA28-WX

/

Weight	Scale	Version
360kg	1:5	B00

Mark

INOVANCE

Page 1 Of 2

Model MEG36-11C17CD-A3A1L-CEN

苏州汇川技术有限公司

A3

正样
2025.10.28
B00


版权所有:侵权必究

外部公开

Amendment	Description

Unit: mm

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	1050
Rated Current	A	323.1
Peak Current	A	500
Rated Power	kW	186.9
Rated Speed	rpm	1700
Rate Frequency	Hz	170
Peak Torque	Nm	1575
Max speed@380V	rpm	2000
Rated voltage	V	380
Rotor inertia	$kg \cdot cm^2$	5426
Weight	kg	360
Stall Torque	Nm	1260
Stall current	A	387.72
Duty	S1	

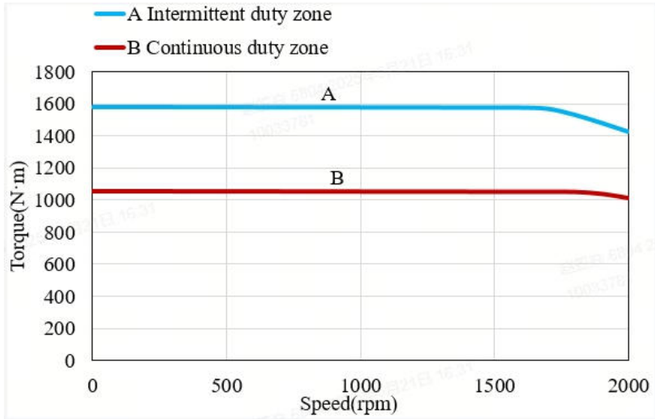

苏州汇川技术有限公司

B00	New Archive	/	20250521
Version	Change method	Changed by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor Outline Drawing			0111AA28-WX
/			Mark: INOVANCE
Weight	Scale	Version	Page 2 Of 2
360kg	1:5	B00	Model: MEG36-11C17CD-A3A1L-CEN