
正样
2025.10.28
B00


Copyright: Copyright infringement reserved

Amendment	Description

外部公开

Unit: mm

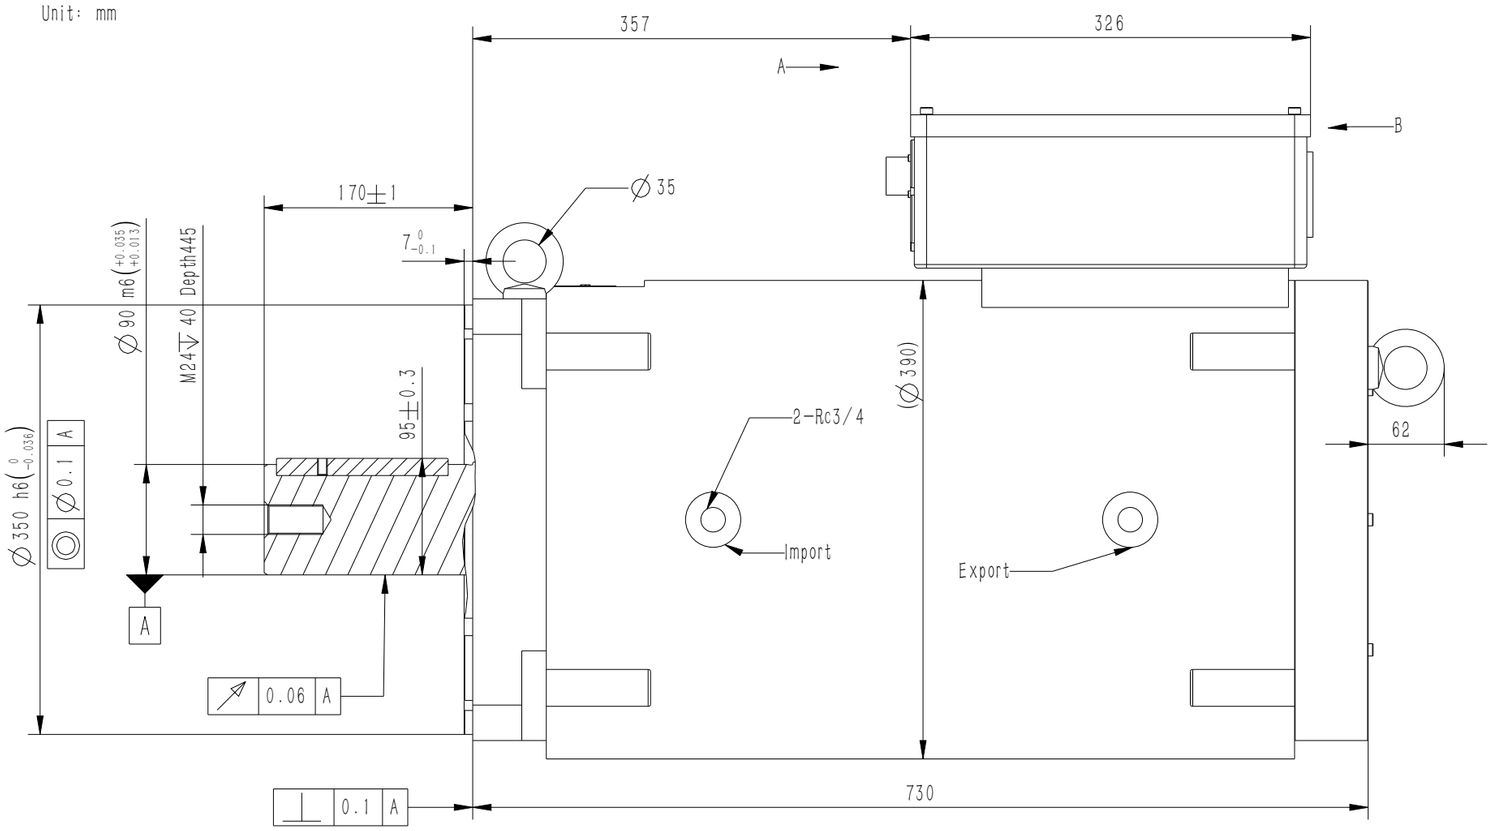


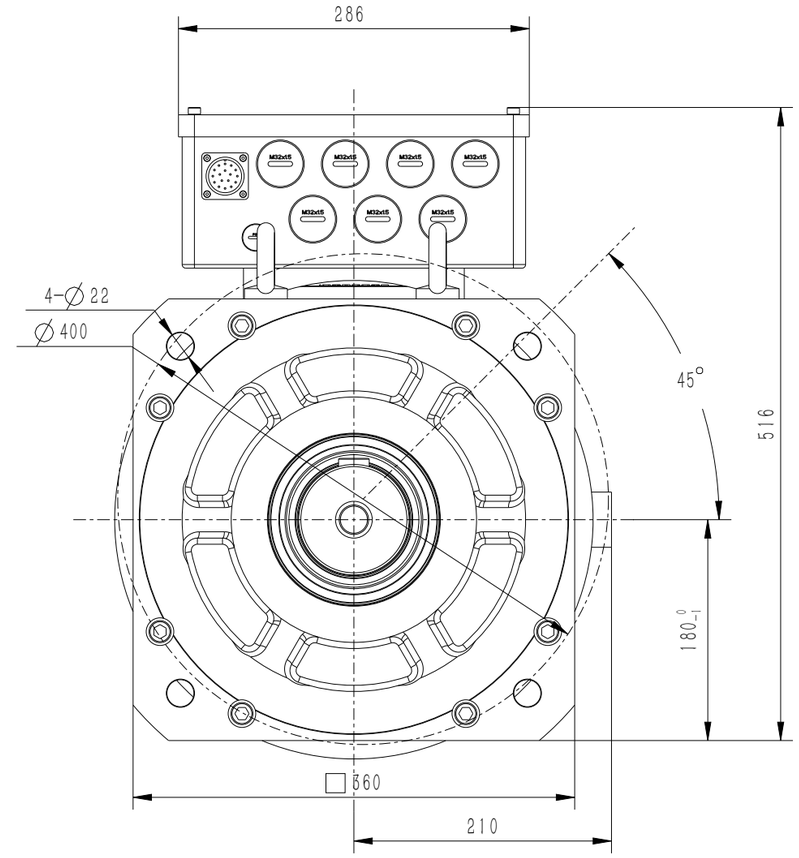


Name	Definition of wiring for absolute value encoders							PTC、KTY		
Definition	PS+ Yellow	PS− Yellow black	VB Battery+ Blue	VB Battery− Blue black	+5V Red	GND Black	Shielding layer	PTC+ Blue	PTC−、KTY+ Blue White	KTY− Green
17PAviation connecto	A	B	E	F	G	H	J	K	L	M





A(Remove waterproof joint)

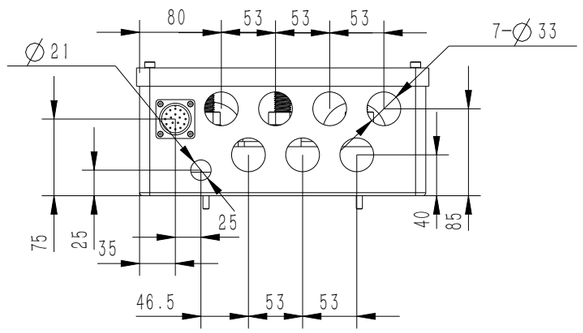

B(Remove waterproof joint)

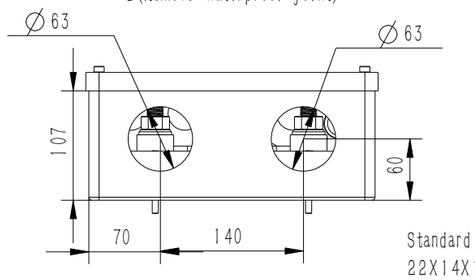


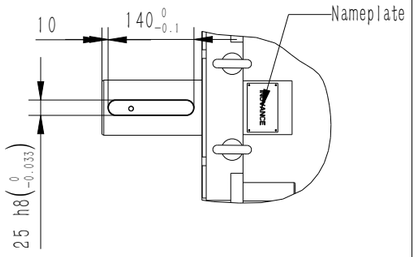

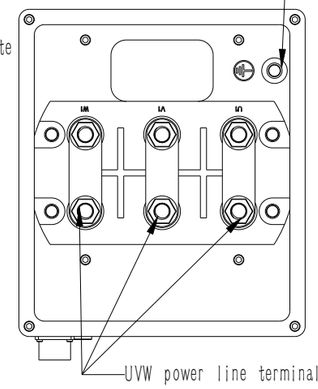

Standard accessories: A-type round head ordinary flat key 22X14X140 Reference GB/T 1096

Motor parameters			
Type		Unit value	Value
Work schedule		S1	
Rated torque	Mdn	Nm	1500Nm
Rated current	Idn	A	430A
Rated power	Pdn	Kw	267Kw
Rated speed	nM	rpm	1700rpm
Rated frequency	F	Hz	170Hz
Peak torque	Mmax	Nm	2250Nm
Peak current	Imax	A	630A
Maximum speed	nmax	rpm	2000rpm
Rated voltage	Vn	V	380V
Rated efficiency	η	%	97.1%
Ke/1000rpm	V	V	200V
Moment of inertia		$kg*cm^2$	$7663kg*cm^2$

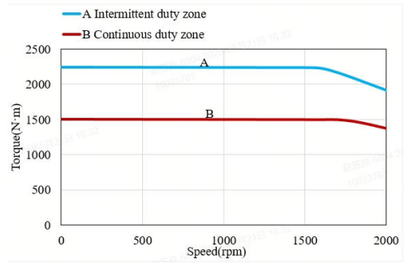

				Motor Outline Drawing	0111AA33-WX	
B00	New Archive	/	20250521			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			420kg	1:5	B00
Approve	/					
					Page 1 Of 1	
					Model	MEG36-15C17CD-A3A1L-CEN

INOVANCE

A3