

正样
2025.03.13
B00


外部公开

Copyright:Copyright infringement reserved.


Amendment	Description

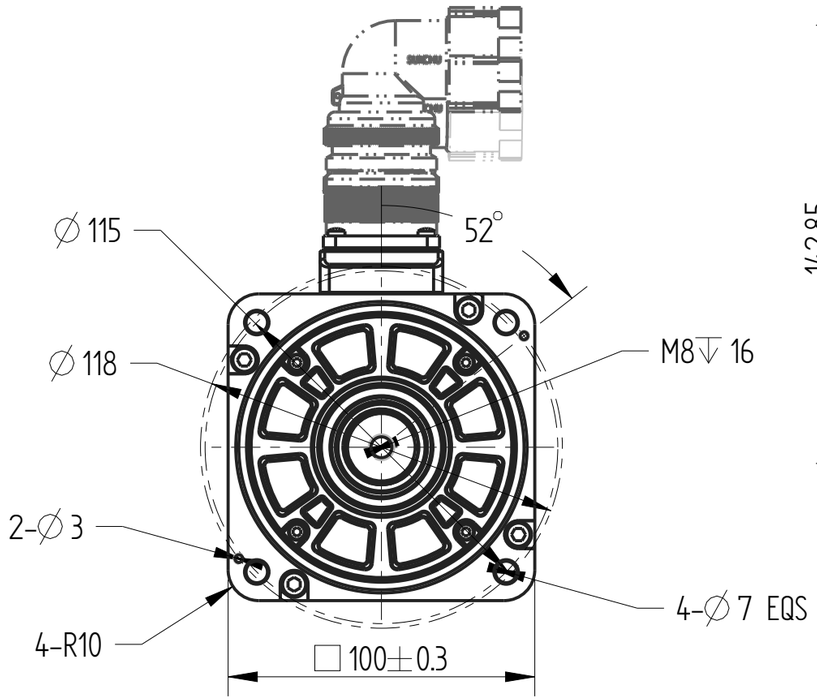

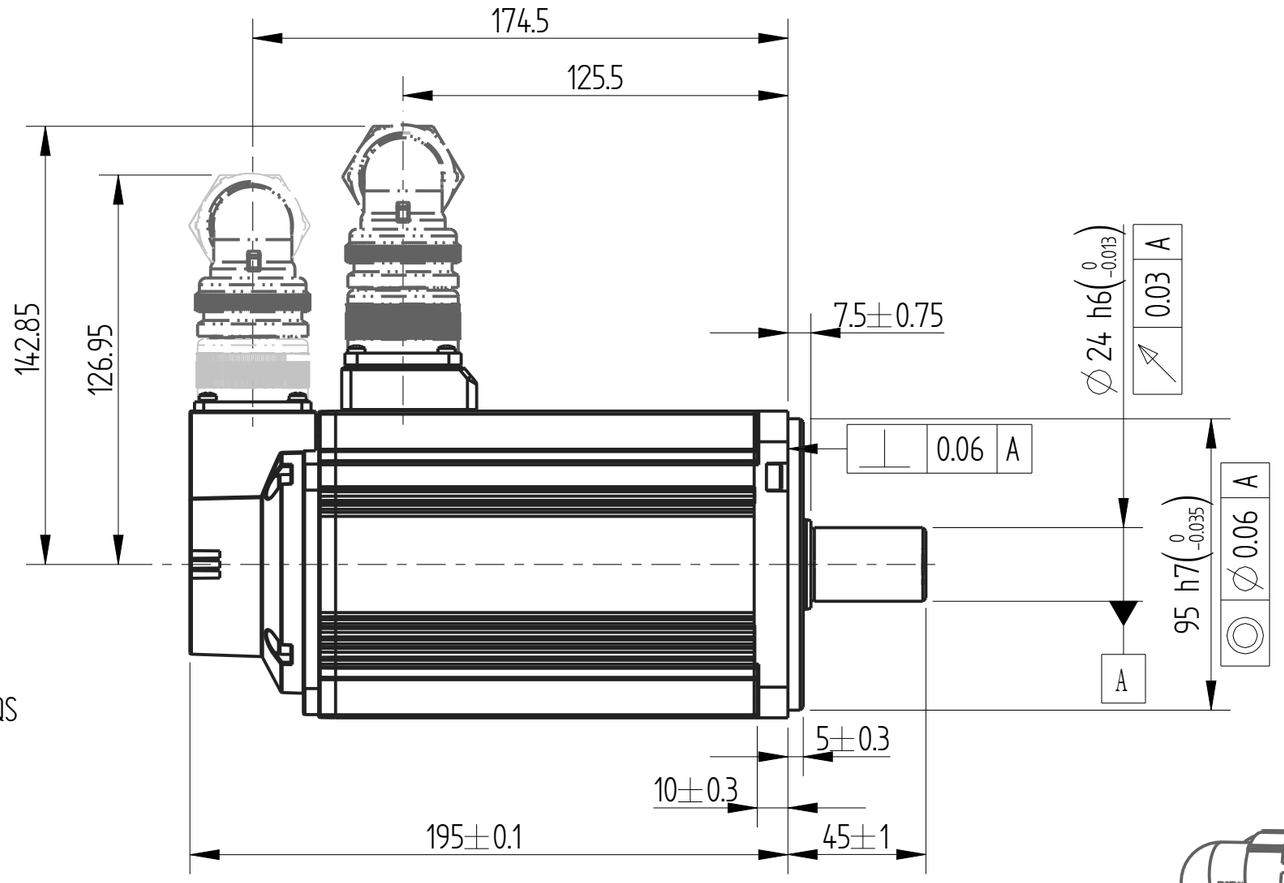

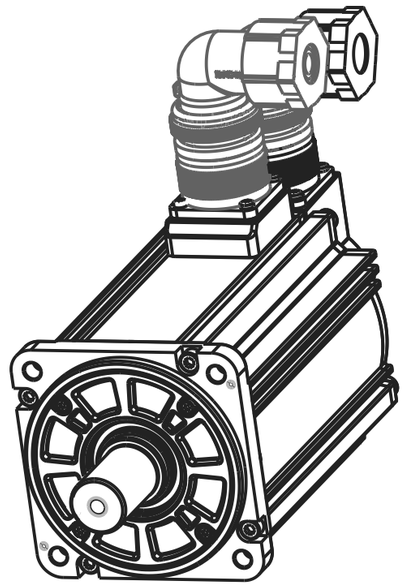

Basic function parameters	
Rated power KW	2.5
Rated voltage V	380
Rated current A	7.2
Peak current at rated speed A	26
Rated torque Nm	7.96
Peak torque at rated speed Nm	23.9
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm2	3.49±10%
Encoder resolution	23bit
Insulation class	155℃
Protection level	IP67
Static torque of brake Nm	/
Brake power supply V	/
Duty cycle	S1
Radial line load N	⩽686
Axial load N	⩽196

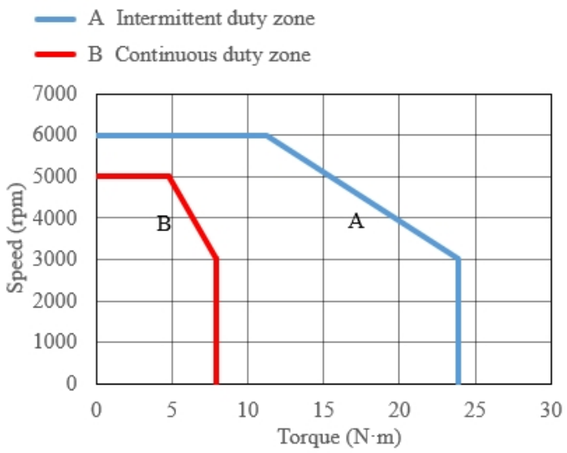

				Motor outline drawing		0111AB87-WX	
B00	New Archive	/	20241021				
Version	Change method	Change by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			/	1:1	B00	Model MS1H2-25C30□-A311R-INT
Approve	/						

INOVANCE

A3