

正样
2025.03.13
B00

Copyright: Copyright infringement reserved


Amendment	Description


外部公开

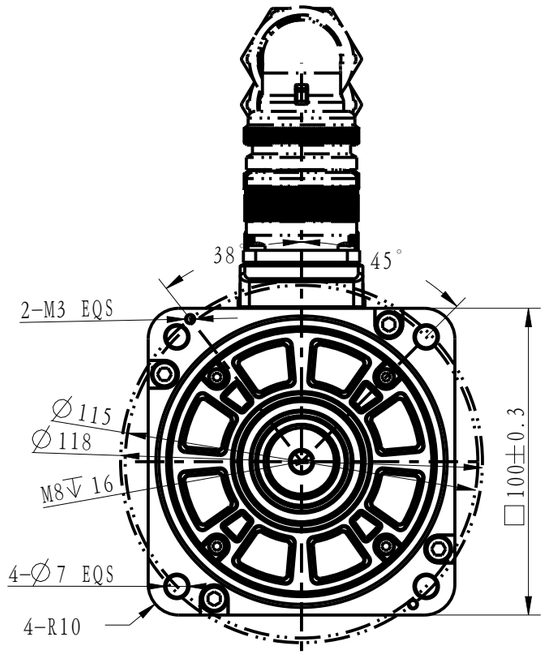

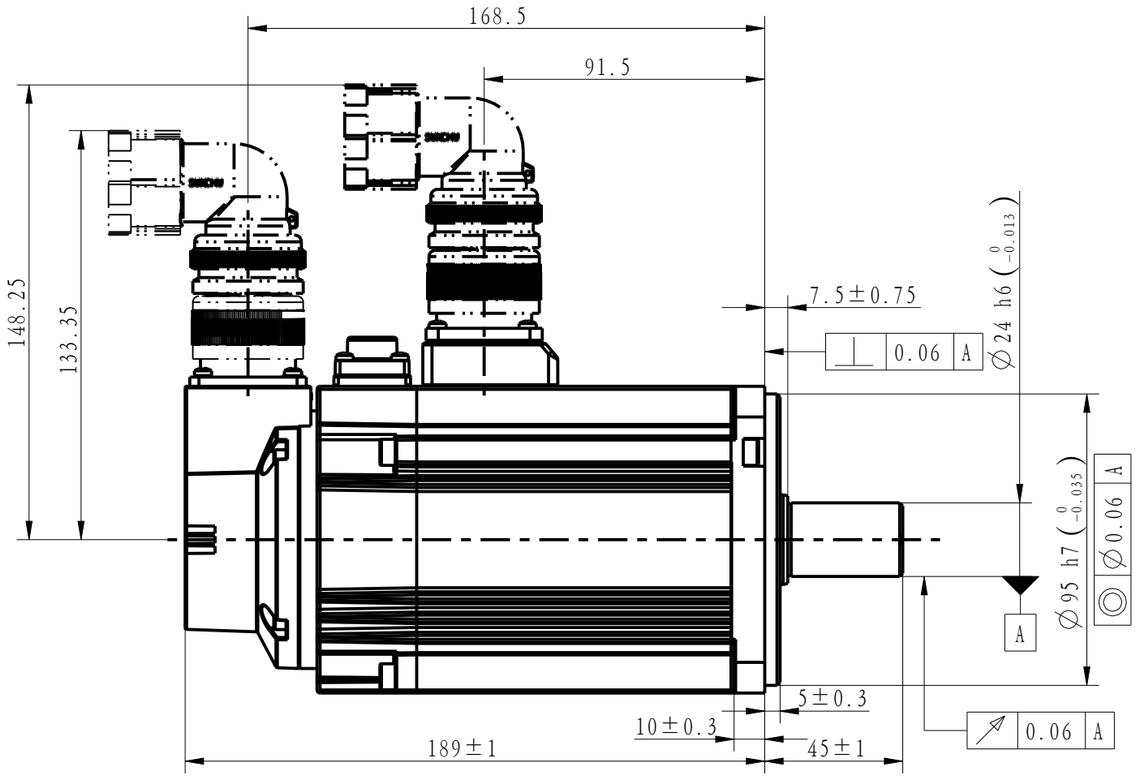

Basic function patmeters	
Rated power kW	1.5
Rated voltage V	380
Rated current A	4.2
Pea current at rated speed A	14
Rated torque Nm	4.9
Peak torque at rated speed Nm	14.7
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg*cm^2	3.17±10%
Encoder resolution	23bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	≥8
Brake power supply V	DC24±10%
Duty cycle	S1
Radial line load N	≤686
Axial load N	≤196

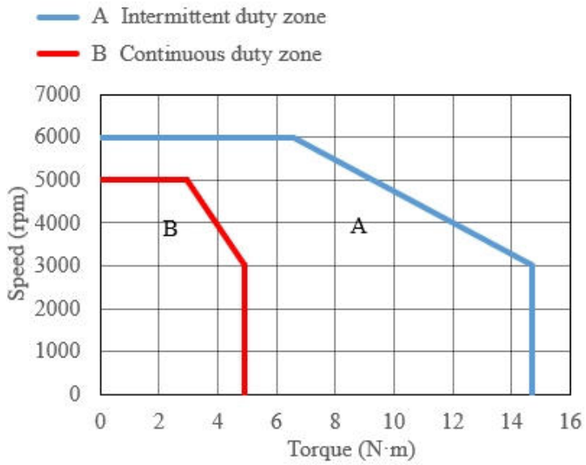



				Motor outlin Drawing		0111AB89-WX	
B00	New archive	/	20241031				
Version	Change method	Changed by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
stangardization	/			5.75kg	1:2	B00	Model MS1H2-15C30CD-A314R-INT
Approve	/						

INOVANCE

A3