
正样
2025.12.02
B00


Copyright: Copyright infringement reserved

外部公开


Amendment	Description


Unit: Millimeter (mm)

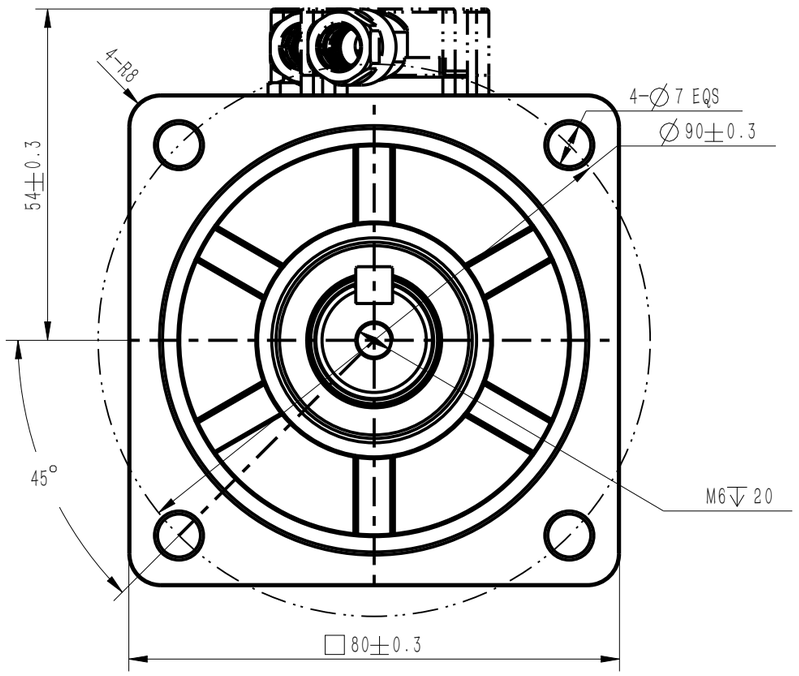


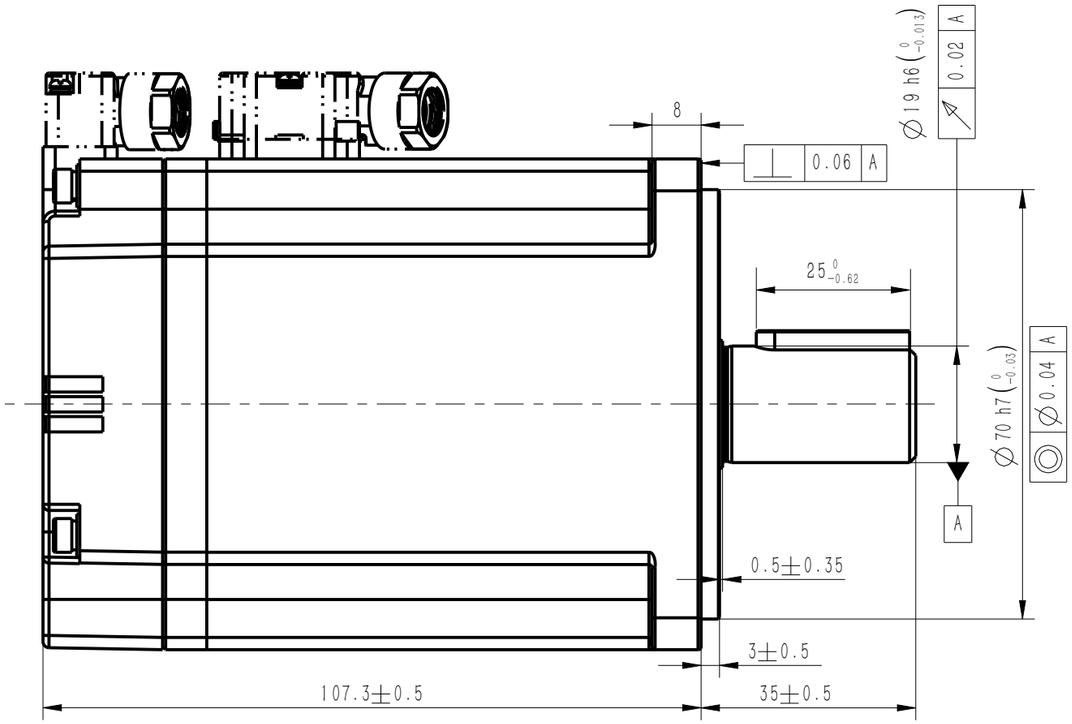


Basic function parameters	
Rated power KW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	1.46± 10%
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤392
Axial load N	≤147

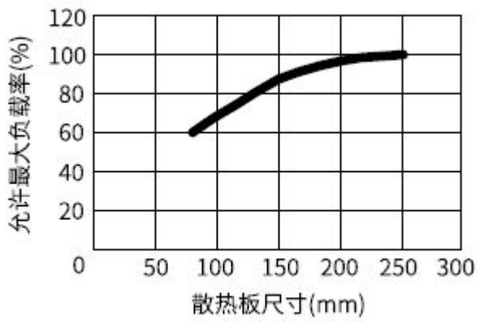

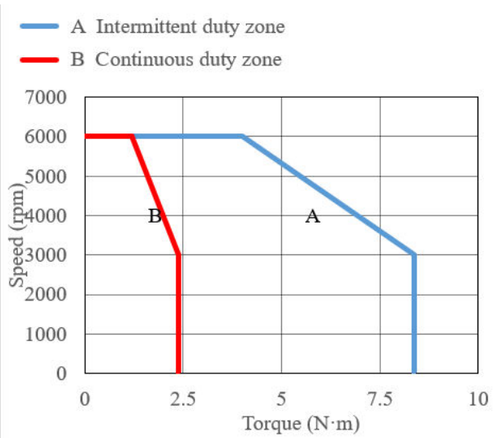




Dimension of shaft end



Dimension of shaft end with key

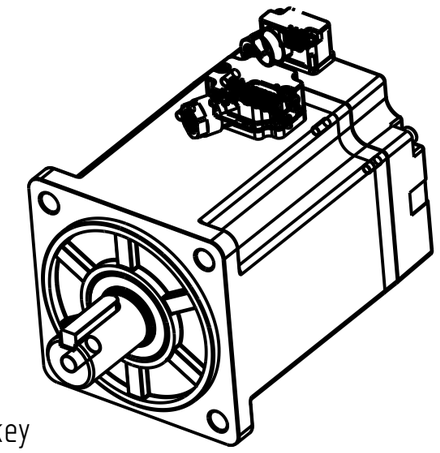

				Motor Outline Drawing	0111AC29–WX	
B00	New Archive	/	20251113			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			2.18kg	1:1	B00
Approve	/					

Page 1 of 1

Model MS1H4-75B30CB-S630R-ZL-INT

INOVANCE

A3