
正样
2025.12.02
B00


Copyright: Copyright infringement reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

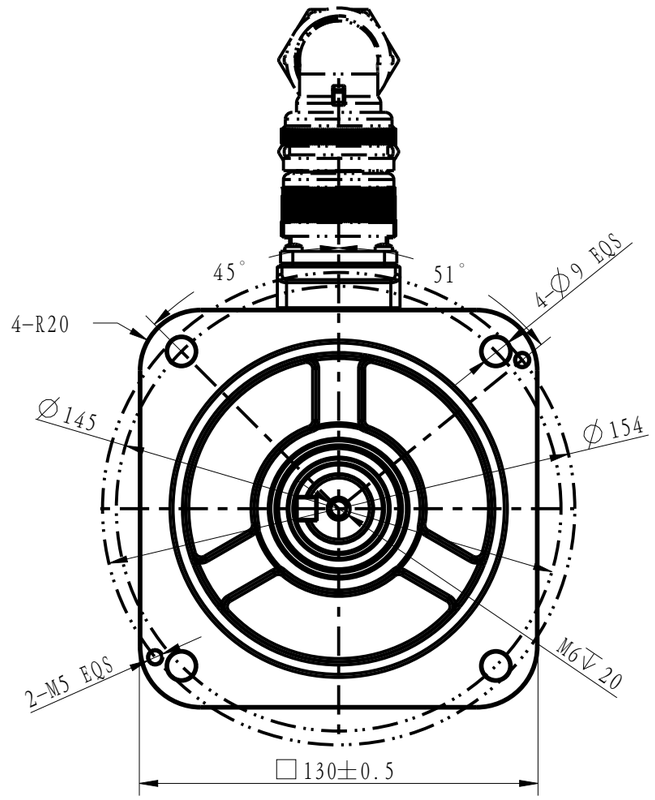


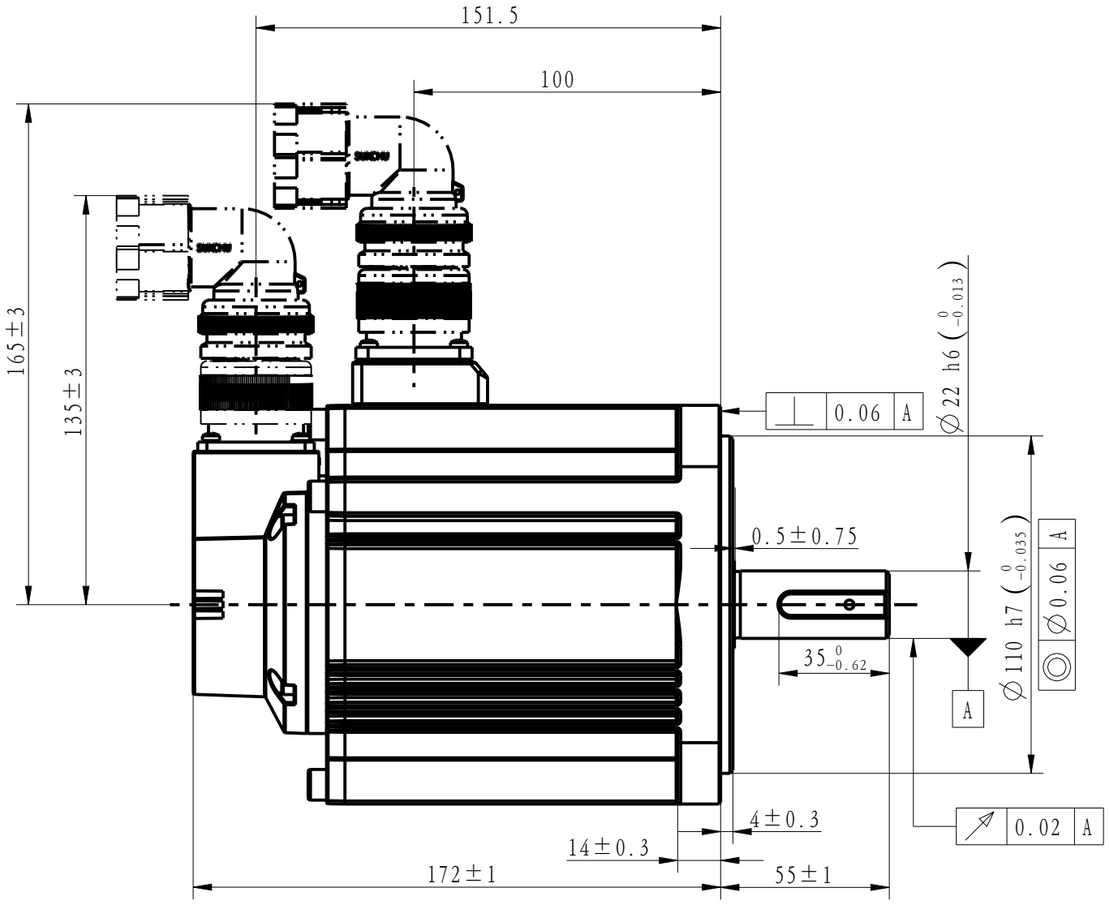


Basic function parameters	
Rated power KW	1.8
Rated voltage V	380
Rated current A	6.75
Peak current at rated speed A	17.7
Rated torque Nm	11.5
Peak torque at rated speed Nm	28.75
Rated speed rpm	1500
Max speed rpm	3000
Rotor inertia kg · cm^2	24.9± 10%
Encoder resolution	26bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤686
Axial load N	≤196

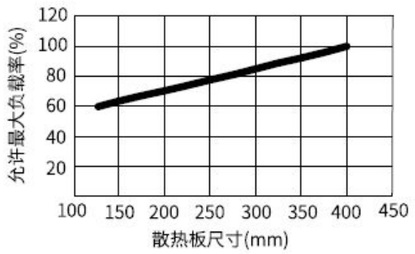

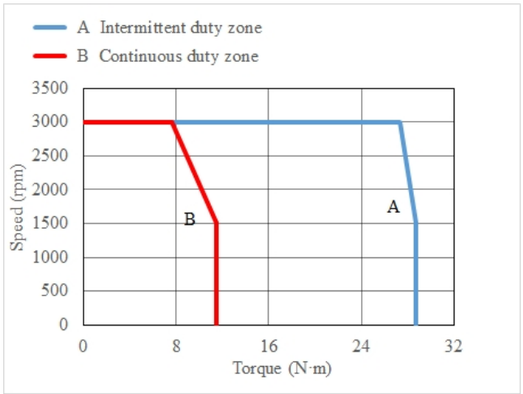




Dimension of shaft end



Dimension of shaft end with key



				Motor Outline Drawing	0111AC31-WX	
B00	New Archive	/	20250113			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			8.5kg	1:2	B00
Approve	/					

Page 1 of 1

Model: MS1H3-18C15CD-S630R-ZL-INT

INOVANCE

A3