
正样
2026.07.21
R00


Copyright: Copyright infringement reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

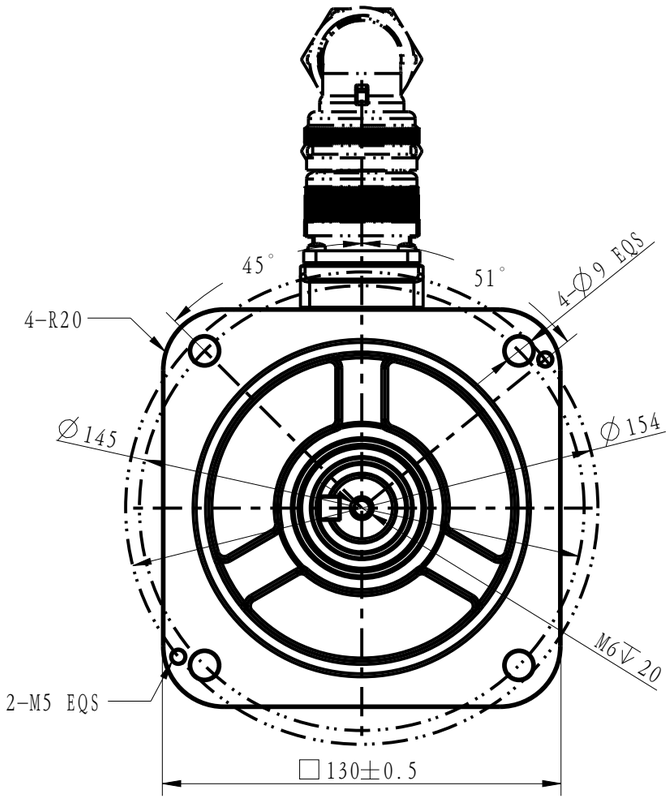

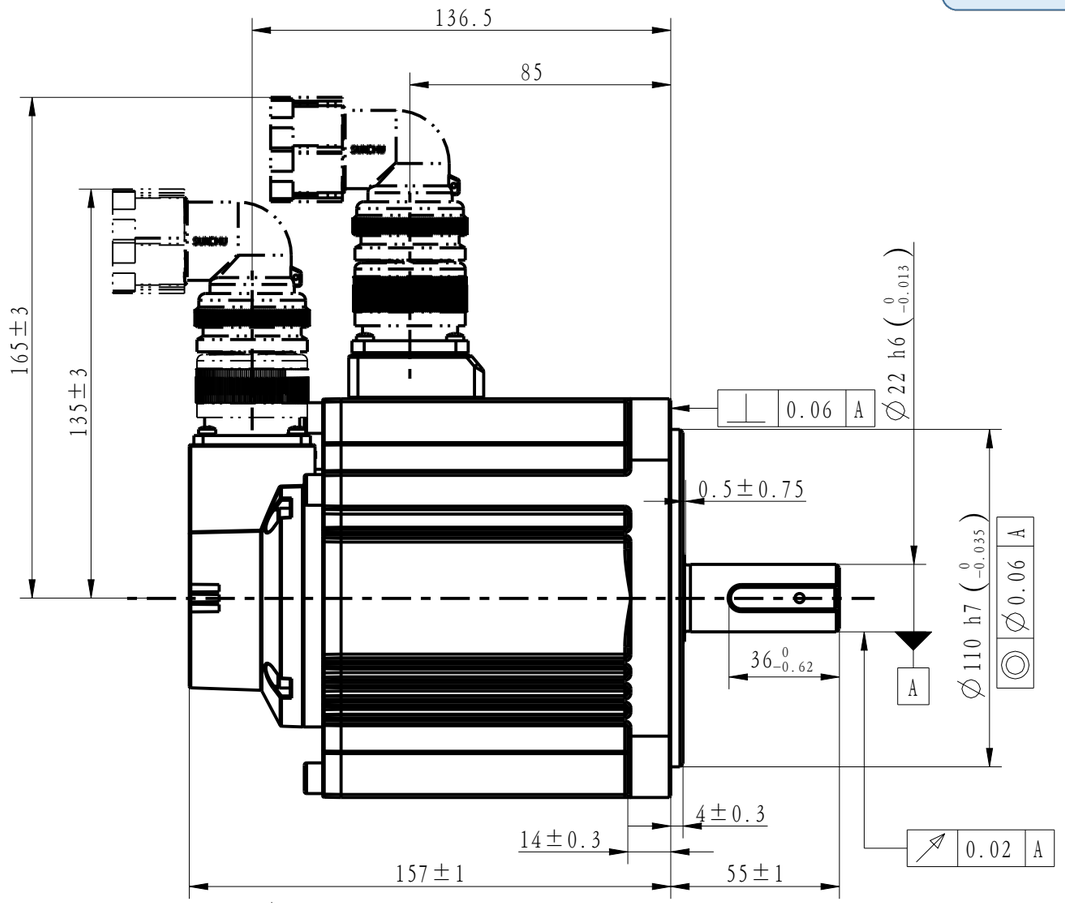


Basic function parameters	
Rated power KW	1.3
Rated voltage V	380
Rated current A	5.1
Peak current at rated speed A	12.6
Rated torque Nm	8.34
Peak torque at rated speed Nm	20.85
Rated speed rpm	1500
Max speed rpm	3000
Rotor inertia kg · cm^2	19.25±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤686
Axial load N	≤196

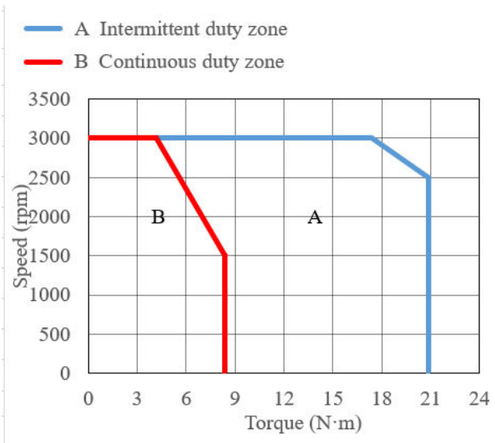




Dimension of shaft end



Dimension of shaft end with key



				Motor Outline Drawing		0111AC32-WX	
B00	New Archive	/	20260721				
Version	Change method	Changed by	Date				
Design	/			/		INOVANCE	
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			7.1kg	1:2	B00	MS1H3-13C15CD-S630R-ZL-INT
Approve	/						

INOVANCE

A3