

正样
2026.07.22
B01

Copyright: Copyright infringement reserved


Amendment	Description


Unit: Millimeter (mm)

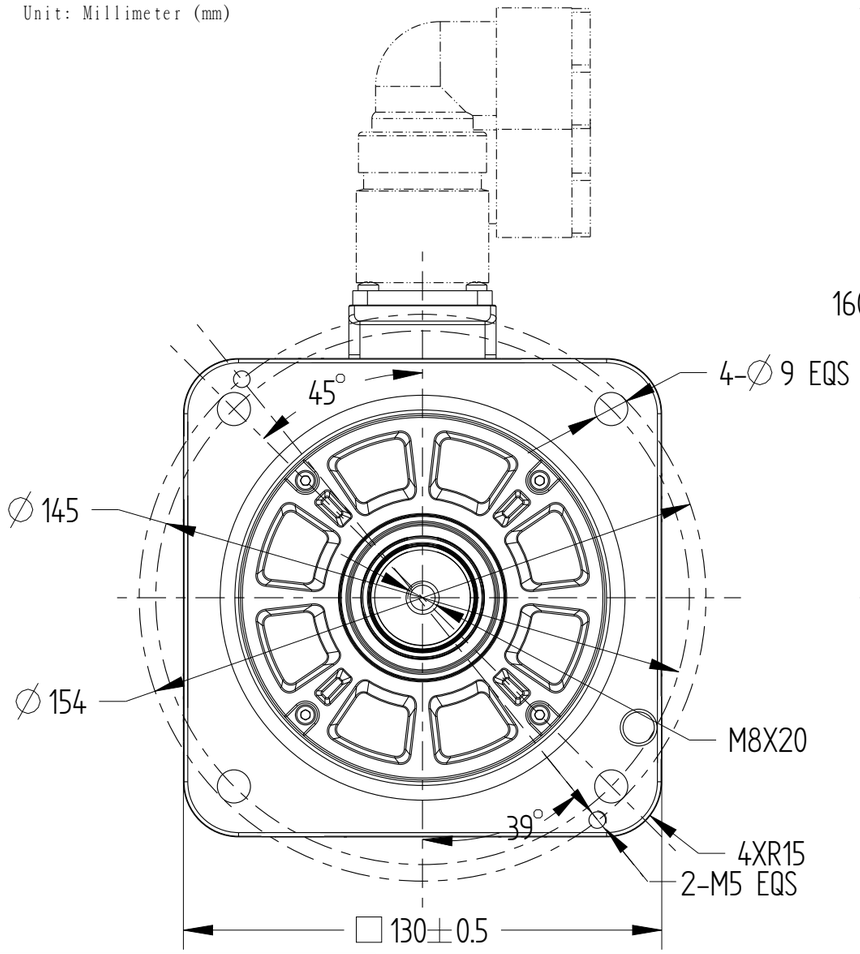

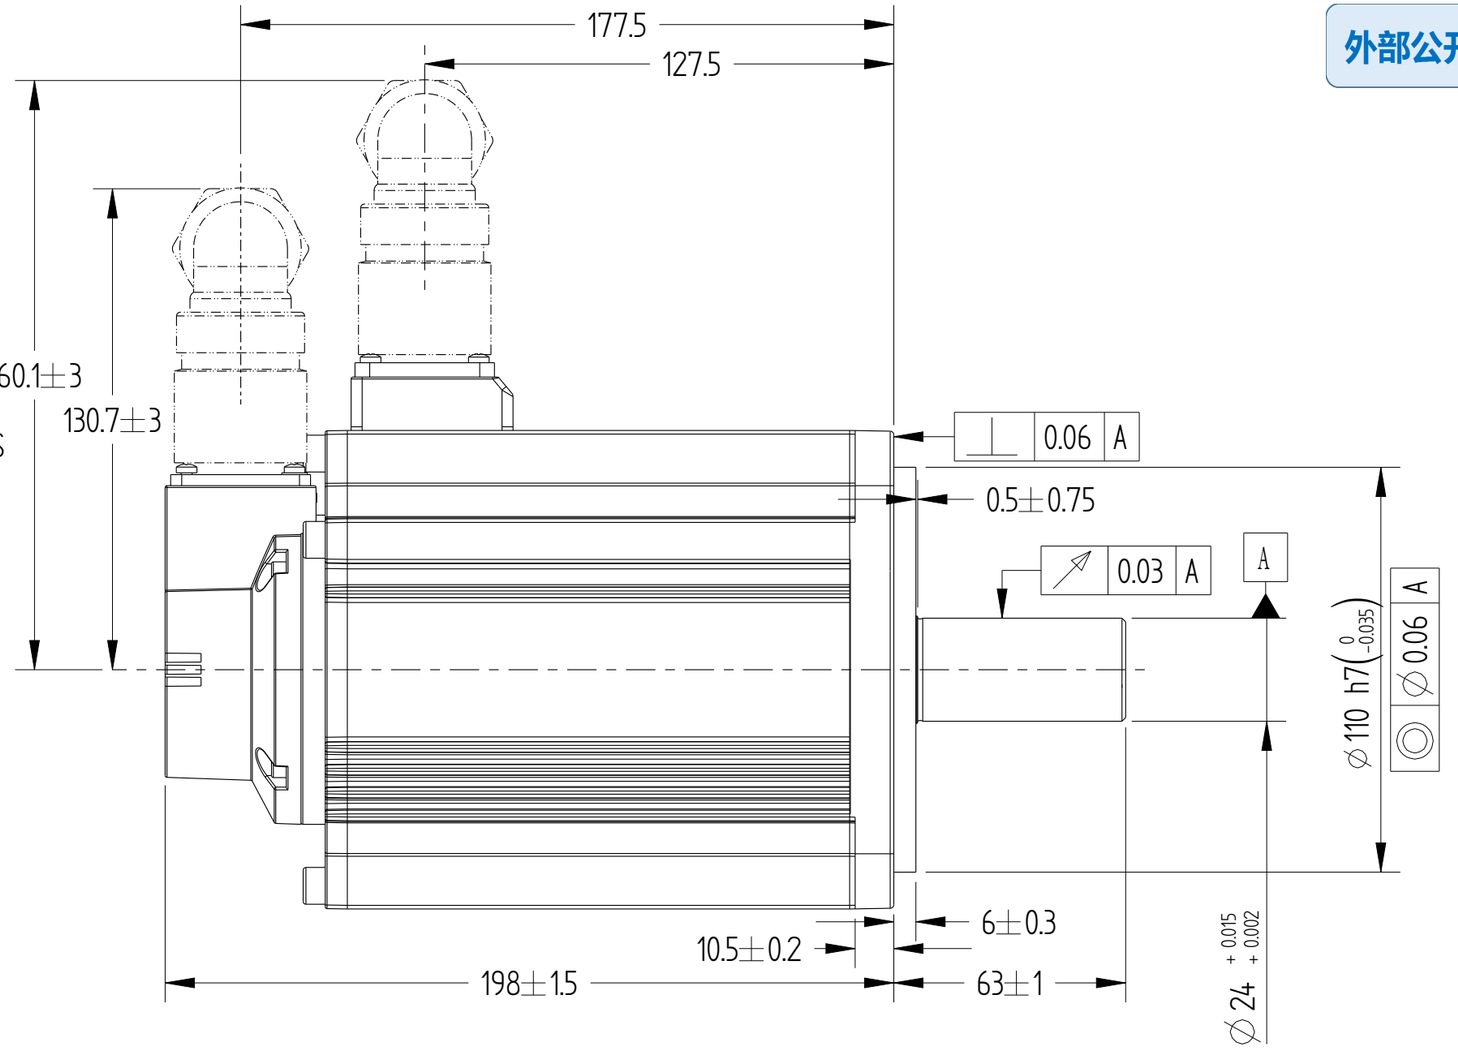

Basic function parameters	
Rated power KW	3
Rated voltage V	380
Rated current A	8.9
Peak current at rated speed A	29
Rated torque Nm	9.8
Peak torque at rated speed Nm	29.4
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	6.4±10%
Encoder resolution	23bit
Insulation class	F(155℃)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	⩽1176
Axial load N	⩽392

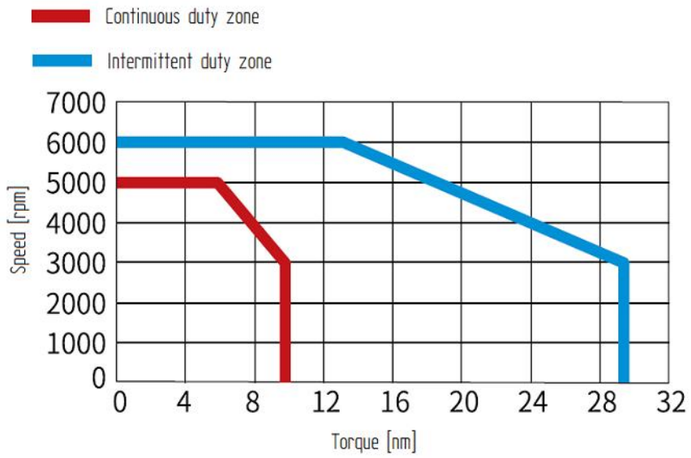



B01	Replace	/	20260630
B00	New Archive	/	20260421
Version	Change method	Changed by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor Outline Drawing

/

Weight	Scale	Version
10kg	3:5	B01

0111AJ41-WX

Mark

INOVANCE

Page 1 of 1

Model	MS1H2-30C30□-A311R-INT-24

外部公开

INOVANCE

A3