
正样
2025.11.04
B00


版权所有·侵权必究

外部公开


Amendment	Description

Unit: mm

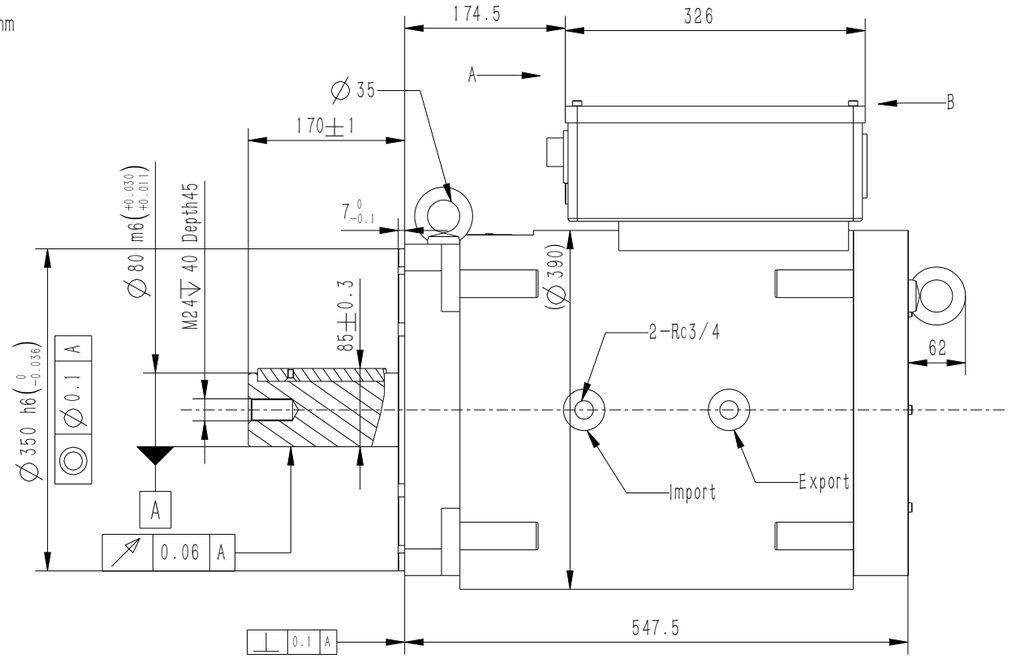


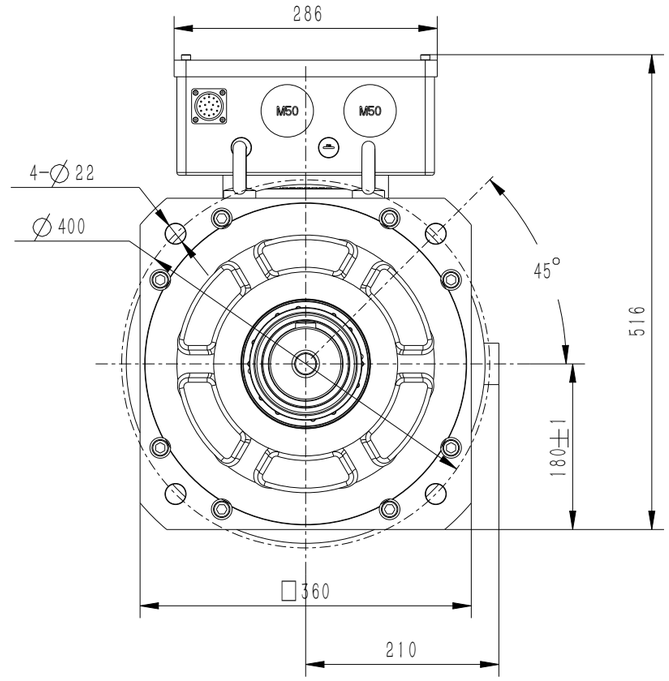


Name	Definition of wiring for absolute value encoders							PTC、KTY		
Definition	PS+ Yellow	PS− Yellow black	VB Battery+ Blue	VB Battery− Blue black	+5V Red	GND Black	Shielding layer	PTC+ Blue	PTC−、KTY+ Blue White	KTY− Green
17PAviation connecto	A	B	E	F	G	H	J	K	L	M




A(Remove waterproof joint)

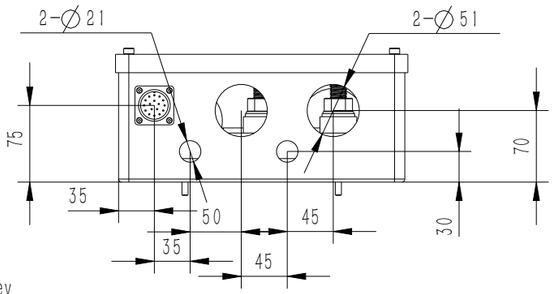

B(Remove waterproof joint)

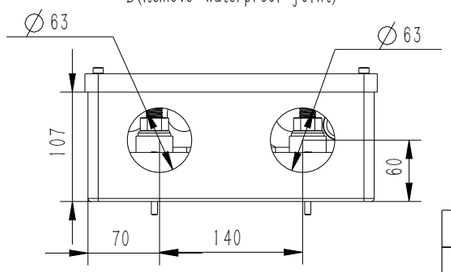


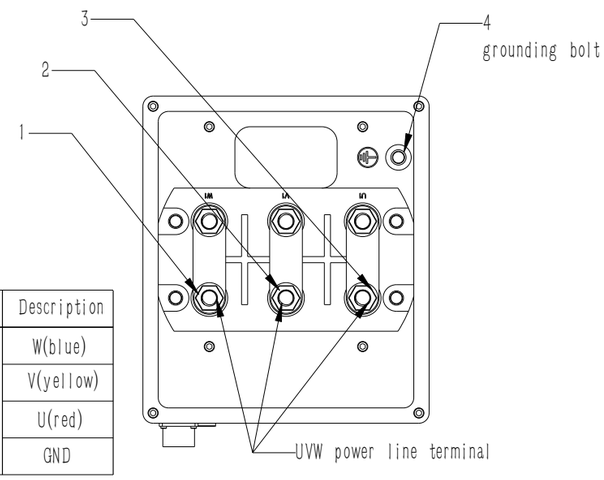

Nr	Specifications	Shape	Description
1	M16	Ring Type	W(blue)
2	M16		V(yellow)
3	M16		U(red)
4	M12		GND

Standard accessories: A-type round head ordinary flat key
22X14X140 Reference GB/T 1096

Service life	
Radial load (N)	Axial load (N)
Fr	Fa
5844	1110



				Motor Outline Drawing	0111AL22-WX
B00	New Archive	/	20250521		
Version	Change method	Changed by	Date		
Design	/			/	Mark
Check	/				
Craft	/				
Verify	/			Weight	Scale / Version / Page 1 Of 2
Standardization	/			320kg	3:20 / B00 / Model: MEG36-75B17CD-A3A1L-CEN
Approve	/				

INOVANCE

苏州汇川技术有限公司

A3

正样
2025.11.04
B00


版权所有·侵权必究

Amendment	Description

外部公开

Unit: mm

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	750
Rated Current	A	215.4
Peak Current	A	337.5
Rated Power	kW	133.5
Rated Speed	rpm	1700
Rate Frequency	Hz	170
Peak Torque	Nm	1125
Max speed@380V	rpm	2000
Rated voltage	V	380
Rotor inertia	$kg \cdot cm^2$	4064
Weight	kg	320
Stall Torque	Nm	912
Stall current	A	258
Duty	S1	

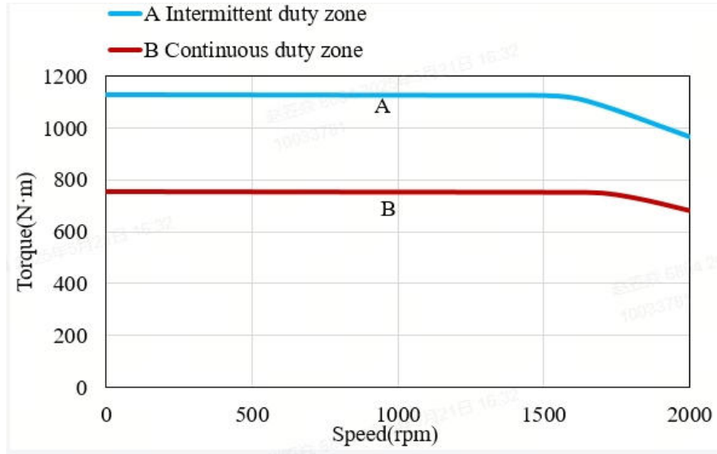

				Motor Outline Drawing		0111AL22-WX	
B00	New Archive	/	20250521				
Version	Change method	Changed by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 2 Of 2
Standardization	/			320kg	3:20	B00	Model MEG36-75B17CD-A3A1L-CEN
Approve	/						

苏州汇川技术有限公司