
正样
2026.07.02
B01


Amendment	Description


外部公开


版权所有·侵权必究

Unit: mm

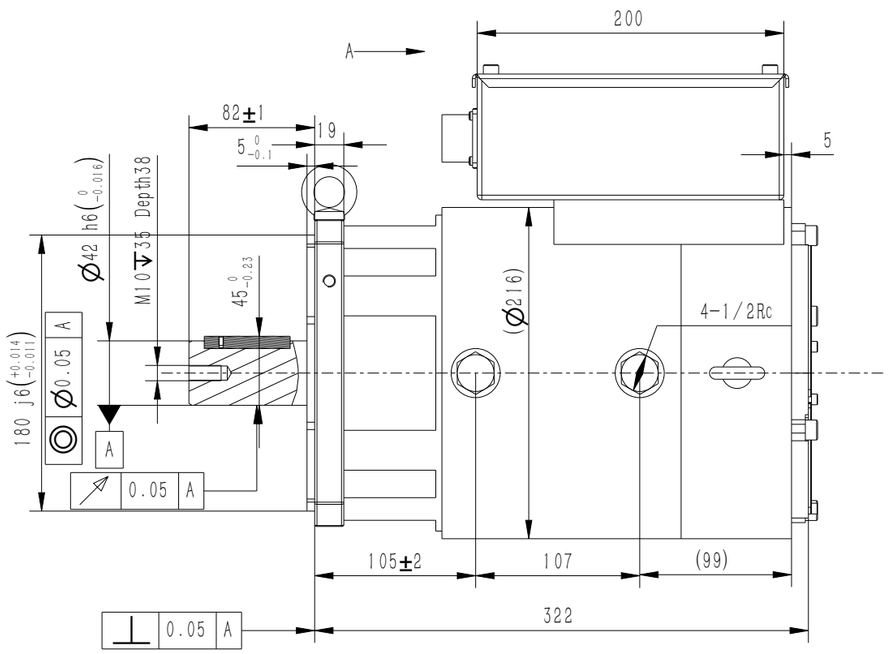

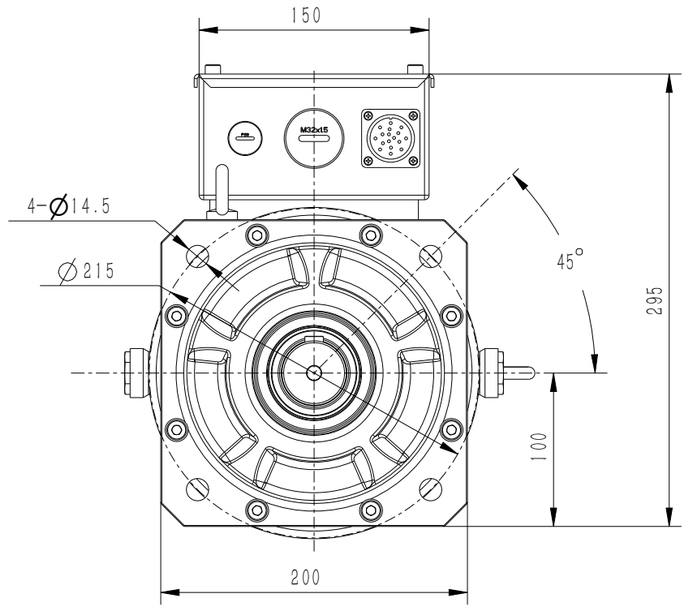

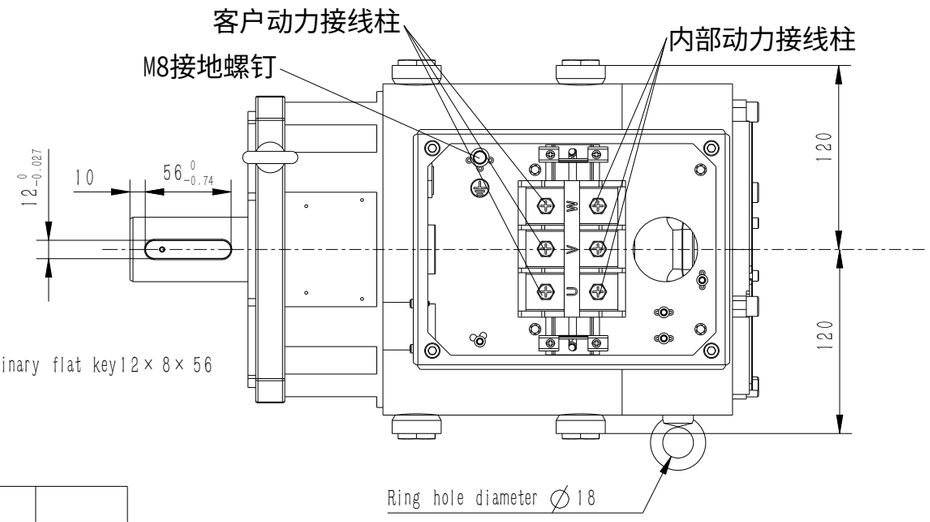


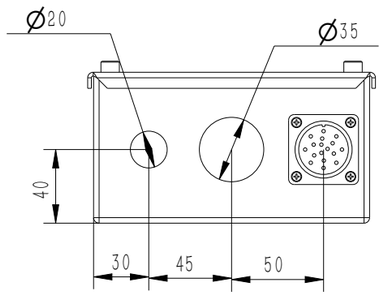

A(Remove waterproof joint)

Standard accessories:
A-type round head ordinary flat key12×8×56
Reference GB/T1096

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	70
Rated Current	A	40.7
Rated Power	kW	22
Rated Speed	rpm	3000
Rate Frequency	Hz	200.00
Peak Torque	Nm	161
Max speed@380V	rpm	4330
Rated voltage	V	380
Eddiciency	%	92.5
Rotor inertia	kg · cm2	198
Weight	kg	51.9
Duty	S1	

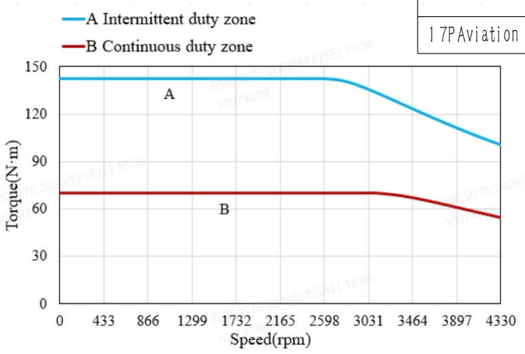

Name	Resolving transformer						Ground wire	PTC		KTY		
Definition	REF+ Red white	REF- Yellow white	COS+ Red	COS- Black	SIN+ Yellow	SIN- Blue	Shielding	PTC+ Blue	PTC- Blue	KTY+ White	KTY- Green	
17PAviation connecto	A	B	C	D	E	F	J	G	H	K	L	

B01	替换	何亮	20260702
B00	New Archive	/	20250326
Version	Change method	Changed by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor Outline Drawing

0111AN11-WX

/

Mark

INOVANCE

Weight	Scale	Version	
51.9kg	1:4	B01	Page 1 Of 1

Model: ISMG1-22D30CD-R1A1L-NT-CEN

苏州汇川技术有限公司