
正样
2026.04.13
B00


Copyright: Copyright infringement reserved

Amendment	Description


外部公开


Unit: Millimeter (mm)

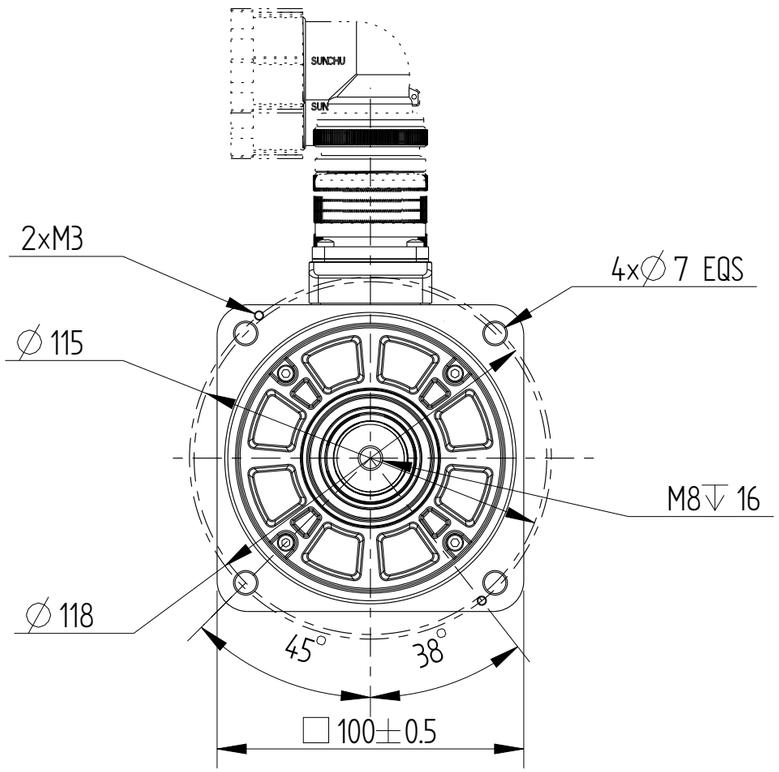

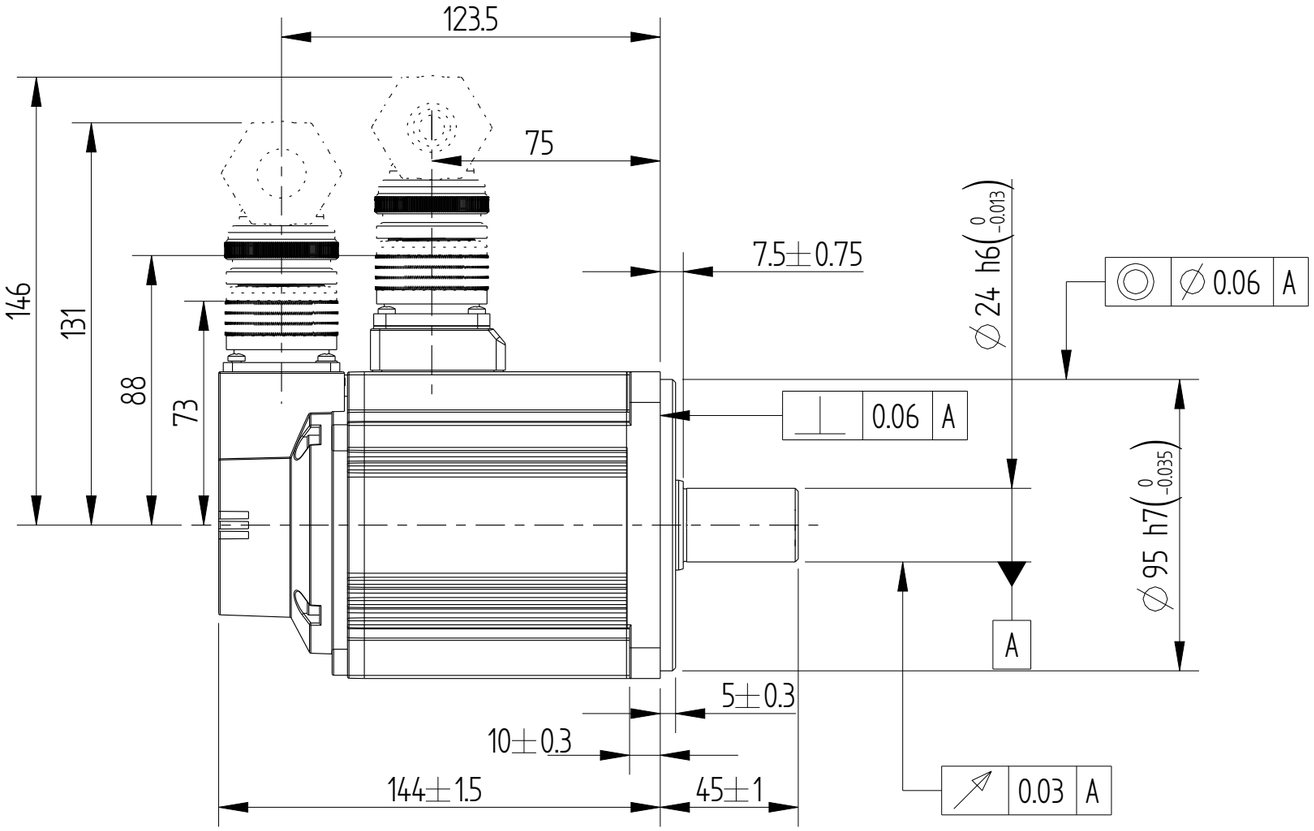

Basic function parameters	
Rated power KW	1
Rated voltage V	380
Rated current A	3.3
Peak current at rated speed A	11
Rated torque Nm	3.18
Peak torque at rated speed Nm	9.54
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	1.78± 10%
Encoder resolution	23bit
Insulation class	F(155° C)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	⩽686
Axial load N	⩽196

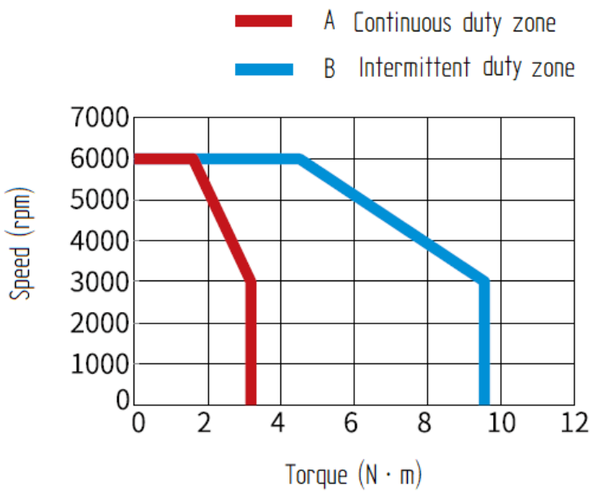

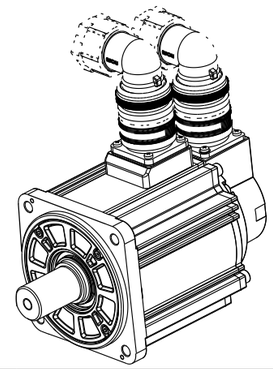

				Motor Outline Drawing	0111AS28-WX	
B00	New Archive	/	20260410			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			3.85kg	1:2	B00
Approve	/					

Page 1 of 1

Model MS1H2-10C30□-A311R-INT

INOVANCE

A3