
正样
2026.05.06
B00


Copyright: Copyright infringement reserved.

Amendment	Description


外部公开


Unit: Millimeter (mm)

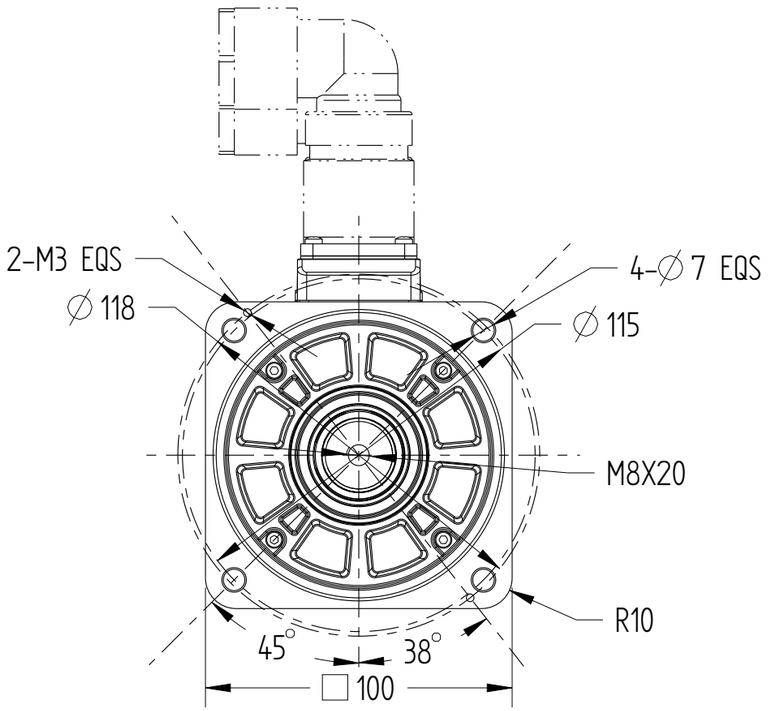

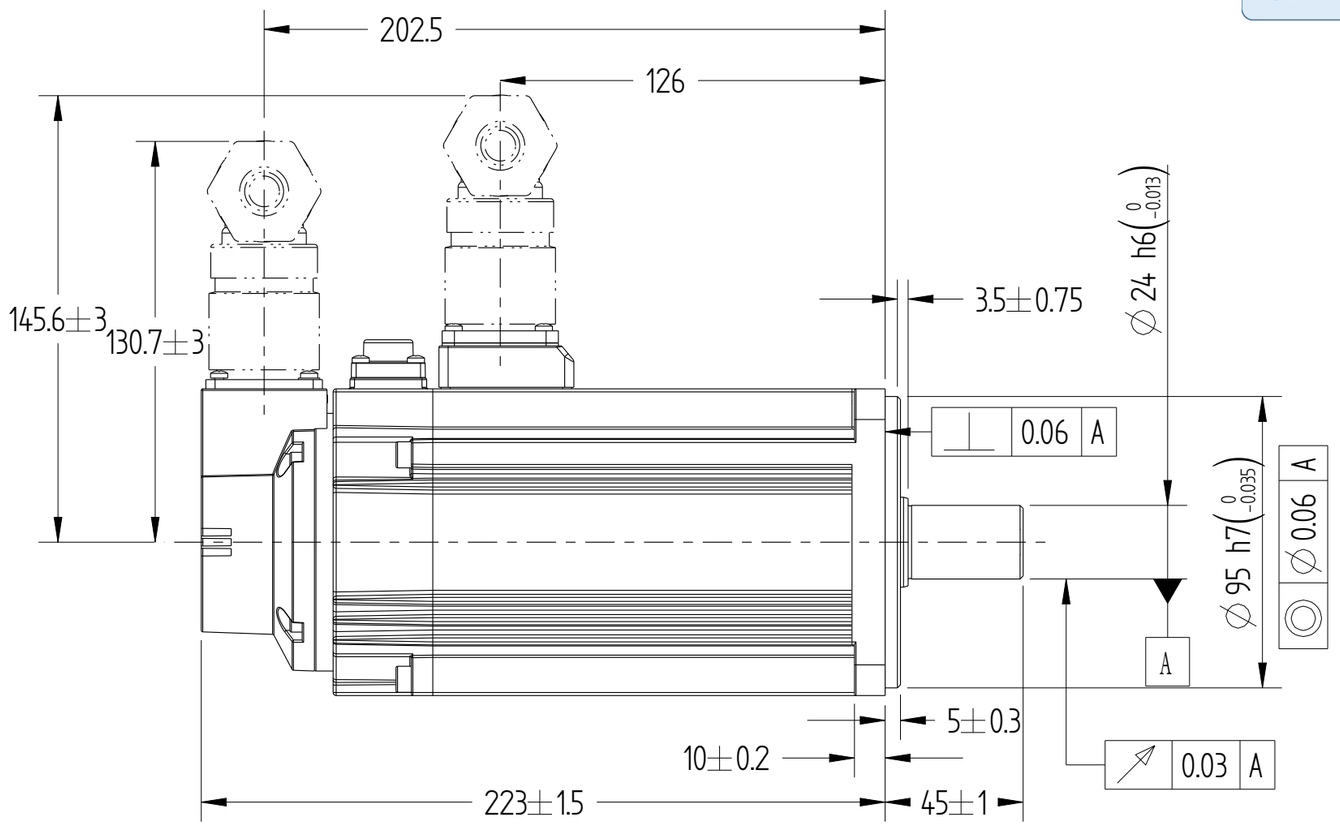

Basic function parameters	
Rated power KW	2.5
Rated voltage V	380
Rated current A	7.2
Peak current at rated speed A	26
Rated torque Nm	7.96
Peak torque at rated speed Nm	23.9
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	4.3± 10%
Encoder resolution	23bit
Insulation class	F(155℃)
Protection level	IP67
Static torque of brake Nm	⩾8
Brake power supply	DC24± 10%
Duty cycle	S1
Radial line load N	⩽686
Axial load N	⩽196

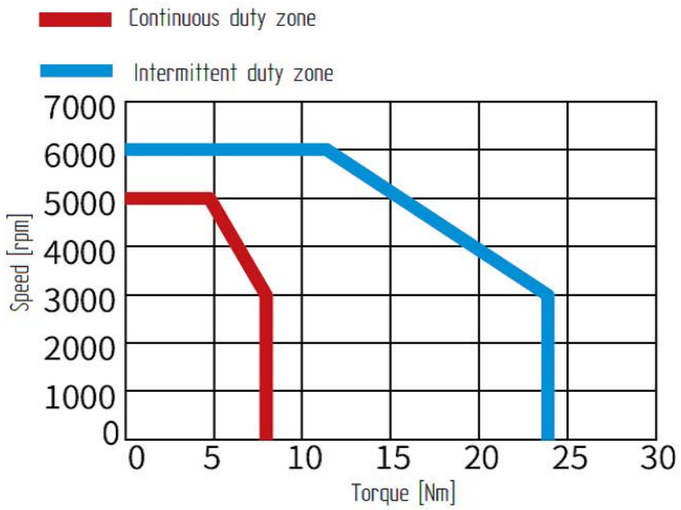

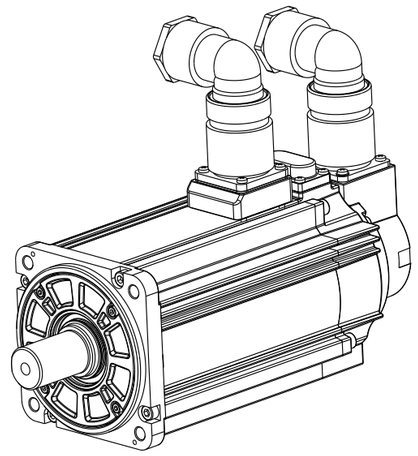

				Motor Outline Drawing		0111AS30-WX	
B00	New Archive	/	20260410				
Version	Change method	Changed by	Date				
Design	/			/		Mark	INOVANCE
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 of 1
Standardization	/			7.35kg	1:2	B00	Model MS1H2-25C30□-A314R-INT
Approve	/						

INOVANCE

A3