

正样
2026.04.13
B00

Copyright: Copyright infringement reserved


Amendment	Description


Unit: Millimeter (mm)

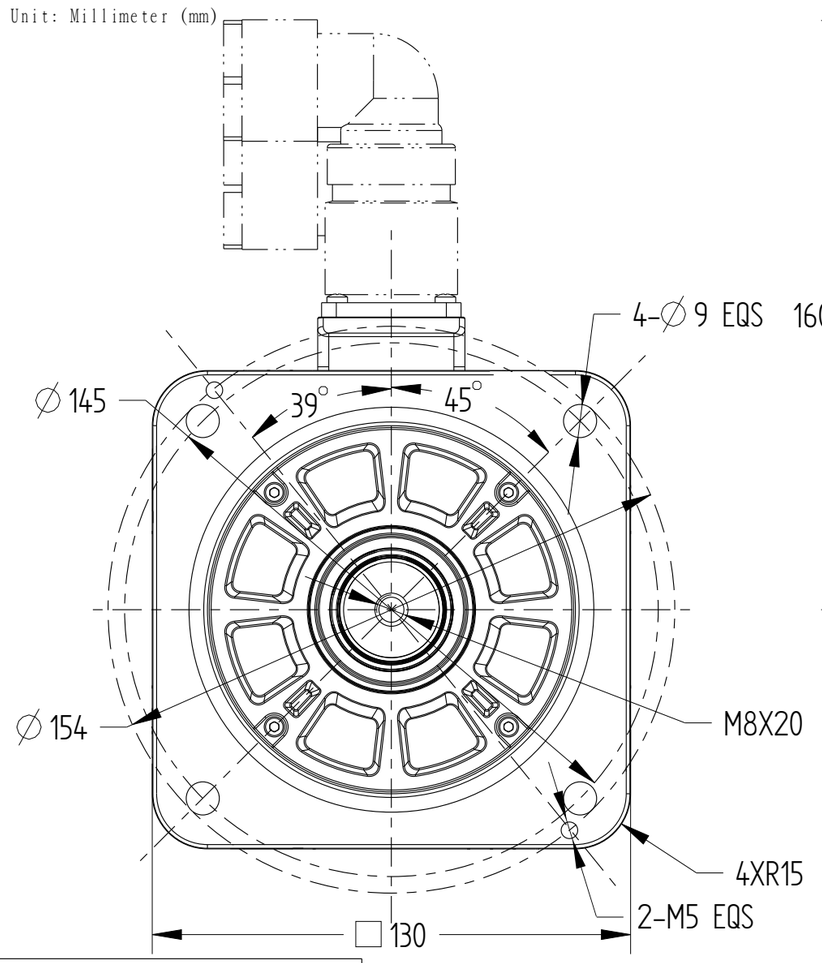

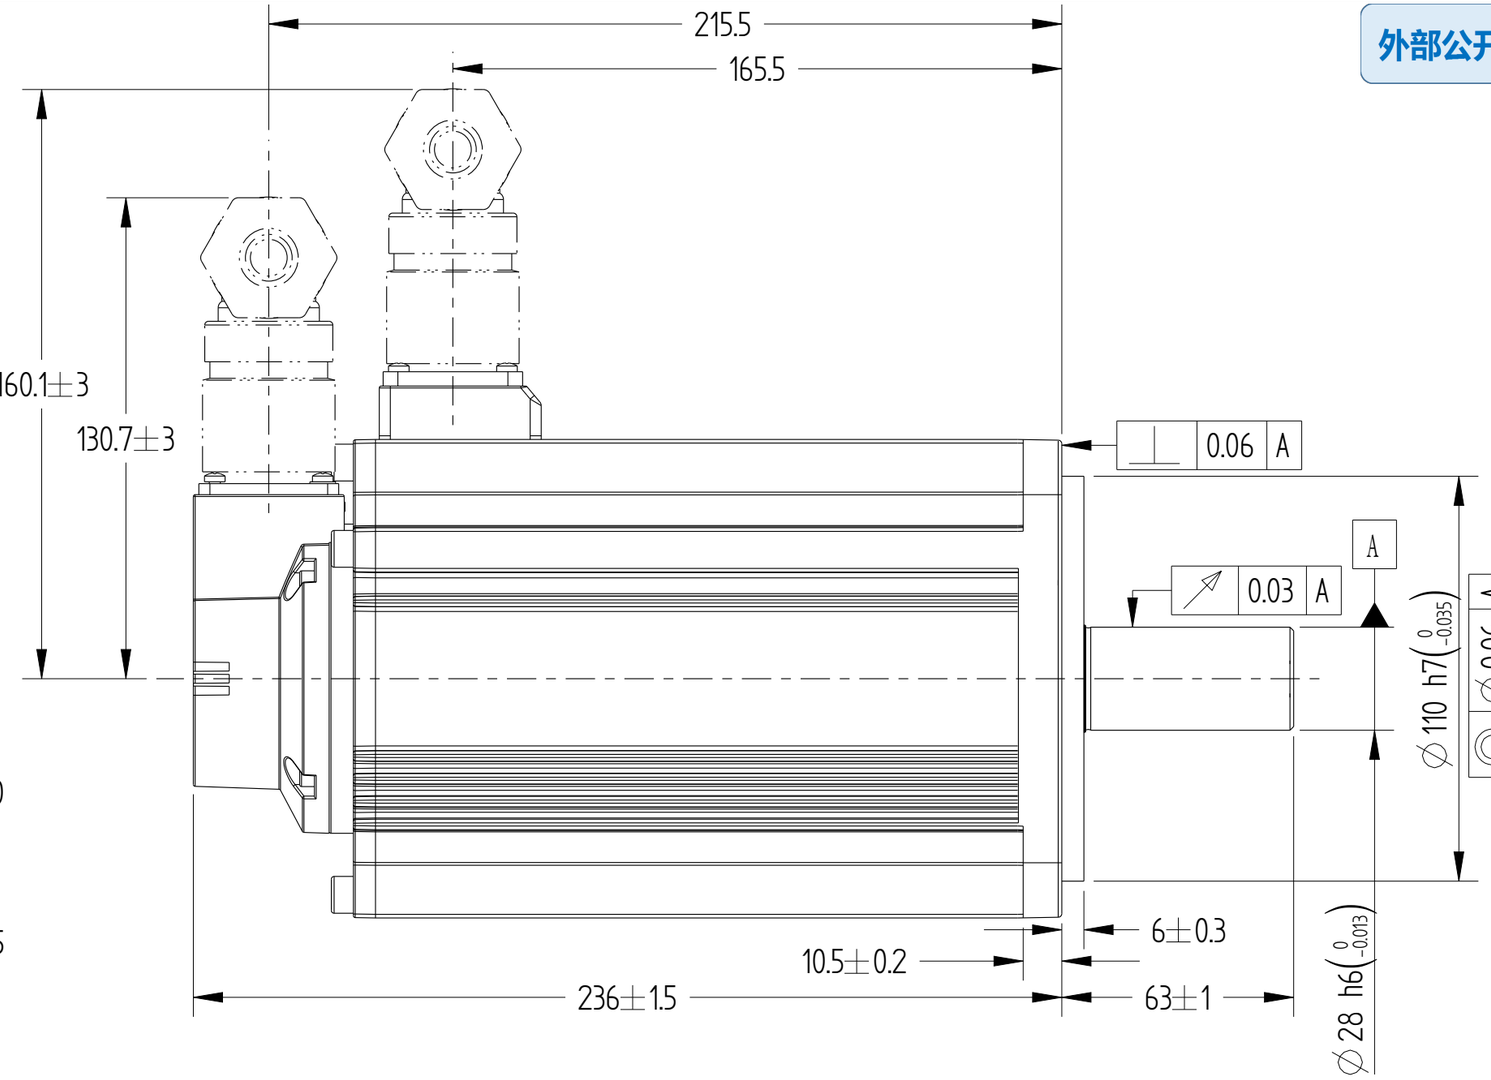

Basic function parameters	
Rated power KW	4
Rated voltage V	380
Rated current A	13.5
Peak current at rated speed A	42.5
Rated torque Nm	12.6
Peak torque at rated speed Nm	37.8
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg · cm^2	9±10%
Encoder resolution	23bit
Insulation class	F(155℃)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤1176
Axial load N	≤392

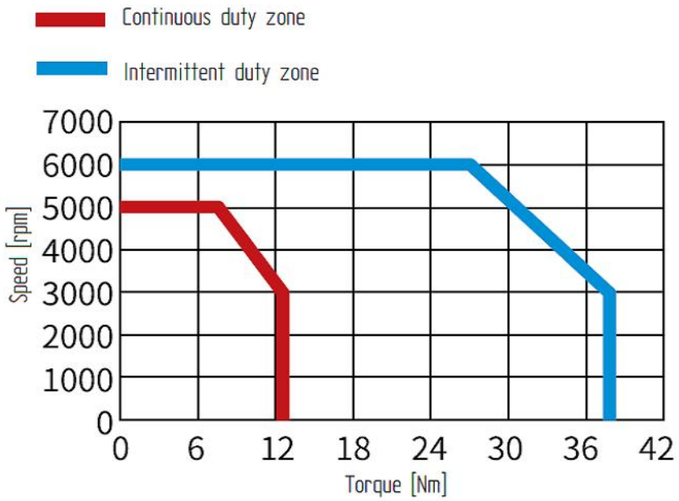

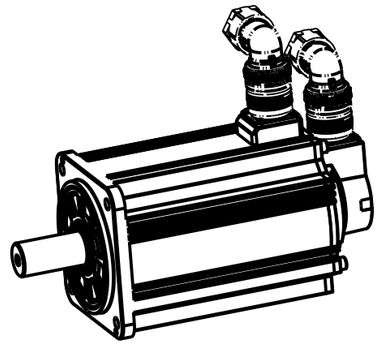

B00	New Archive	/	20260410
Version	Change method	Changed by	Date
Design	/		
Check	/		
Craft	/		
Verify	/		
Standardization	/		
Approve	/		

Motor Outline Drawing	0111AS32-WX
/	Mark

Weight	Scale	Version	Page 1 of 1
13.2kg	3:5	B00	Model: MS1H2-40C30CD-A311R-INT

INOVANCE

A3

外部公开