
正样
2026.03.31
B00


版权所有·侵权必究


外部公开

Amendment	Description


Unit: mm

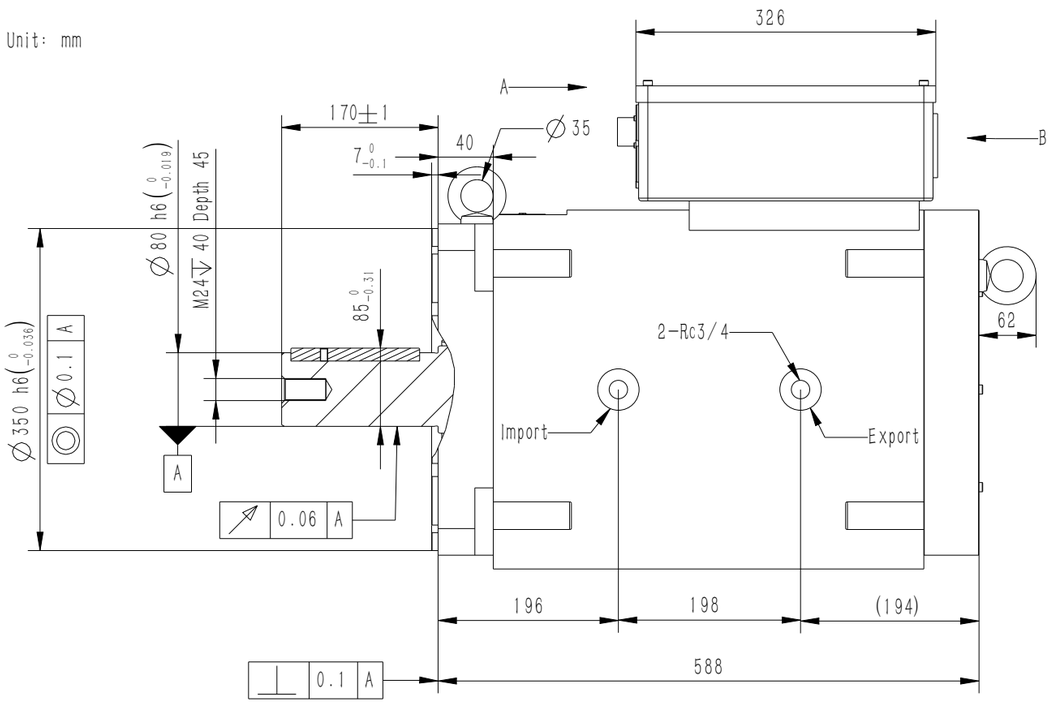

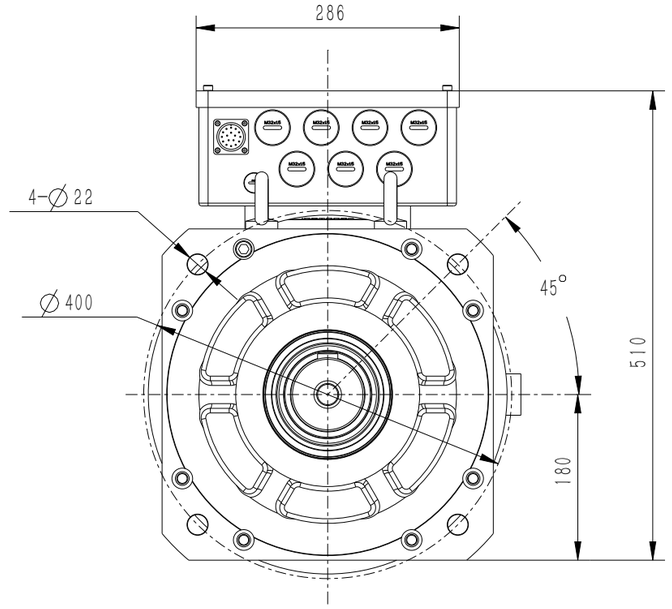





A(Remove waterproof joint)

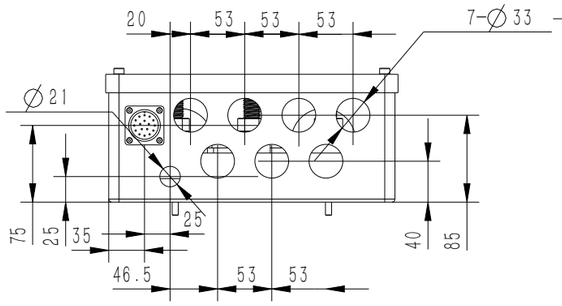


B(Remove waterproof joint)

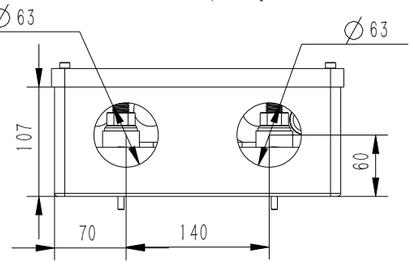

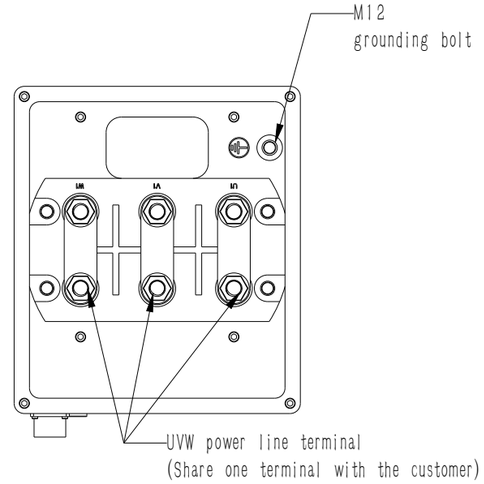

Standard accessories: A-type round head ordinary flat key
22X14X140 Reference GB/T 1096

Motor parameters			
Type		Unit value	Value
Work schedule		S1	
Rated torque	Mdn	Nm	900
Rated current	Idn	A	258.5
Rated power	Pdn	Kw	160
Rated speed	nM	rpm	1700
Rated frequency	F	Hz	170
Peak torque	Mmax	Nm	1800
Peak current	Imax	A	570
Maximum speed	nmax	rpm	2000
Rated voltage	Vn	V	380
Rated efficiency	η	%	96.9
Moment of inertia		kg*cm^2	4745

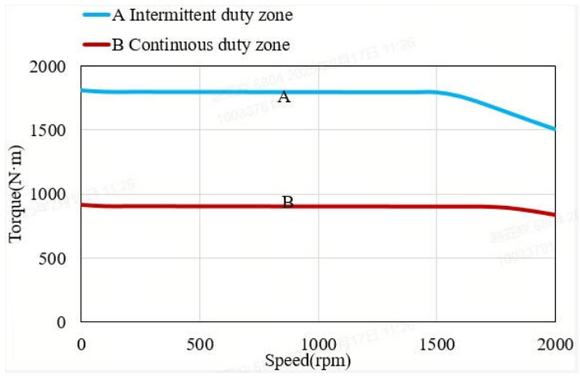

Name	Definition of wiring for absolute value encoders							PTC、KTY		
Definition	PS+ Yellow	PS- Yellow black	VB Battery+ Blue	VB Battery- Blue black	+5V Red	GND Black	Shielding layer	PTC+ Blue	PTC-、 KTY+ Blue White	KTY- Green
17P Aviation connecto	A	B	E	F	G	H	J	K	L	M



				Motor Outline Drawing	0111AT02-WX	
B00	New Archive	龚寅	20260331			
Version	Change method	Changed by	Date			
Design	龚寅			/	Mark	INOVANCE
Check	何亮					
Craft	孟沙					
Verify	姚铜佳			Weight	Scale	Version
Standardization	朱秋萍			320kg	3:20	B00
Approve	王凡				Page 1 Of 1	
					Model	MEG36-90B17CD-A3A1L-CEN

苏州汇川技术有限公司